ITCB Twin HV (High Volume) 120/240V

and control

complete

Agency:

Brew tea brewing funnel

USB programming capable

TD4T, TDO and TDO-N tea dispensers

with three brew buttons and two batch sizes

ensure ultimate uniformity of extraction

• Sleek modernized design language, with rounded angles on the corners and trunk

Brews into 1.5 gallon and 1.0 gallon BUNN Thermofresh servers for coffee, and

· Digital readout displays in English, Spanish, or French --- for easier programming

BUNN Infusion Series technology allows for multiple recipes from one footprint ---

• Tea brewing capability built-in with integrated dilution nozzle, software and Quick

• Exclusive Peak Extraction™ Sprayhead is multi-directional with a 17-hole design to

· Electronic funnel lock prevents removal of each brew funnel until drip- through is

· Pre-infusion and pulse brew for maximum flavor extraction. Cold brew lockout &

Additional Features

· Brews coffee or tea on both sides - Mix and Match to meet your needs

digital temperature control further ensure top-notch brewing.

· Hot water faucet (supplied for custom installation)

Large 5.6 gallon (21.2L) tank provides back-to-back brewing capacity

· Energy-saver mode reduces tank temperature during idle periods

Height: 35.0" Width: 20.5" Depth: 24.0" (88.9cm) (61.0cm) (52.1cm)



Specifications

Product #: 52400.0100

Water Access: Plumbed

Finish: Stainless

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
120/240	25	6000	Yes/	-	672	60°F (15.5°C)	1	3	60

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

CAD Drawings

	<u> </u>	O				
PSI	kPa	Fitting Supplied	Water Flow Required (GPM)	2D	Revit	KLC
20-90	138-621	3/8" BSPP	1.25	•		

WARNING: This product can expose you to chemicals including Bisphenol A (BPA), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov


BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle



the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

09/30/2024

Servers Sold Separately

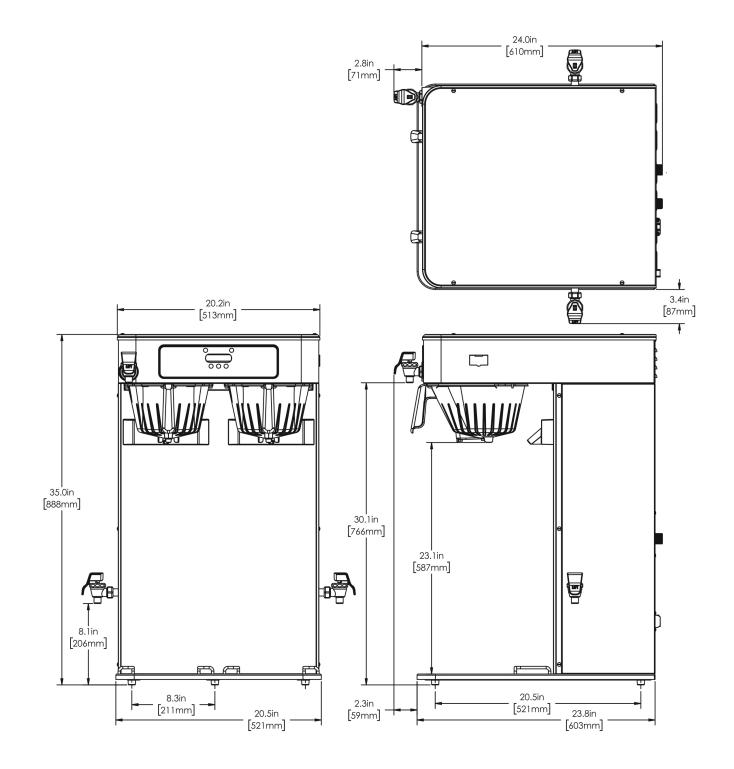

Unit				Shipping					
	Height	Width	Depth	Height	Width	Depth	Weight	Volume	
English	35.0 in.	20.5 in.	24.0 in.	38.3 in.	24.4 in.	28.6 in.	95.210 lbs	15.411 ft ³	
Metric	88.9 cm	52.1 cm	61.0 cm	97.2 cm	61.9 cm	72.6 cm	43.187 kgs	0.436 m³	



 BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle
 Last U

 the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.
 09/30

 For most current specifications and other info visit bunn.com.
 09/30

Last Updated: 09/30/2024

Related Products & Accessories: ITCB Twin HV (High Volume) 120/240V(52400.0100)





BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated: 09/30/2024

Serving & Holding Options: ITCB Twin HV (High Volume) 120/240V(52400.0100)





BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

Last Updated: 09/30/2024

Serving & Holding Options: ITCB Twin HV (High Volume) 120/240V(52400.0100)



