



**GF1375-5 Gas + Roof + Base Cabinet**  
**SSP: Stainless steel with Black enamel front panels**

Rotisol's GrandFlame Rotisserie Ovens epitomize beauty and functionality, featuring a unique cooking system. Visible flames & elegant finishes provide atmosphere, quality & design provide dependability and spit options and accessories allow for increased diversity.

**Features:**

- Countertop unit
- 5 spits with independent motors for reduced down time and energy consumption
- 7 spit positions adjust distance from the heat
- Middle drip pan for cooking of different products without cross-contamination
- "K" glass doors to prevent heat loss for faster cooking, energy savings, and worker safety
- Powerful halogen lamp

**Cleaning/Safety:**

- Double interior panels to protect motors and gas lines from grease
- Removable interior panels for ease of cleaning
- Controlled opening and closing positions for doors

**Ships with:**

- 5 prongless anti-cutting spits included
- Channeled bottom drop pan with drain plug
- 2 spit movers

When it comes to rotisseries,  
 Rotisol is your indispensable partner!

**CAPACITY**

25 - 30 chickens per hour

**POWER**

Natural Gas, Propane Gas, All-Electric

**CERTIFICATION**



**ACCESSORIES & OPTIONS**

- Prongless V-Spit
- Prongless anti-cutting Spit
- Rectangular Basket Spit
- Roast Basket Spit
- Ham/Turkey Spit
- Complete Chicken Spit
- Lamb/Suckling Pig/ Prime Rib Spit
- Vertical Spit System with 9 accessory options
- Rack for ribs
- Raised rack for drip pan
- Decorative Roof with illuminated sign option
- Base Cabinet with retractable table
- Heated Base Cabinet with retractable table
- Rolling Racks
- Wall rack for spit storage

**FINISHES**

- SS: All Stainless Steel with brass or chrome trim
- SSP: Stainless Steel with porcelain enamel or metal front panels in choice of colors
- LUX: Porcelain Enamel in choice of 45 colors with brass or chrome trim

**STOCK COLOR OPTIONS**



**Rotisol-France, Inc** • 341 North Oak Street, Los Angeles, CA 90302 • Tel/ 800-651-5969 310-671-7254 • Fax/ 310-671-8171  
 www.rotisolusa.com info@rotisolusa.com


# SPECIFICATIONS GRANDFLAME 1375-5

PROJECT : \_\_\_\_\_  
 ITEM NUMBER : \_\_\_\_\_ QTY: \_\_\_\_\_

DIMENSIONS (in inches)			
	WIDTH	HEIGHT	DEPTH
1-Rotisserie	56 1/8"	45 5/8"	22 1/2"
2-Roof	54 1/4"	6 3/8"	25 5/8"
3- Base cabinet	54 1/4"	29 7/8"	23 7/8"
4-Heated base cabinet	54 1/4"	29 7/8"	23 7/8"
1+2+3	56 1/8"	80 7/8"	28 3/8"
1+2+4	56 1/8"	80 7/8"	28 3/8"
1+2	56 1/8"	51"	28 3/8"
1+3	56 1/8"	75 1/2"	23 7/8"
1+4	56 1/8"	75 1/2"	23 7/8"

GAS MODEL - GF1375-5	
- GAS CONNECTION	pipe ; 3/4", 82,000 Btu/h (natural) 75,000 Btu/h (propane) Minimum pressure : 7" WC Regulator & shut off valve are furnished 2 burner per unit
- ELECTRICAL CONNECTION	550 W/ 208-220 V/ 1 phase/ 2.5 Amps (HBC)2605 W/ 208-220 V/ 1 P/ 11.8 Amps 1 Electrical cable : 78" length / 60 Hertz NEMA plug not included - direct plug requ.
- Above finish floor connection :	1 or 1+2 = 9" AFF 1+4 or 1+3 = 19" AFF 1+4+2 or 1+3+2 = 30" AFF

ELEC MODEL - GF1375-5	
- ELECTRICAL CONNECTION	21,000 Watts / 208-220 Volts 3 phases / 56 Amps 1 Electrical cable : 78" length Direct plug required NEMA plug not included (HBC)22 KW/ 208-220 V/ 3 P/ 58 Amps
- Above finish floor connection :	1 or 1+2 = 9" AFF 1+4 or 1+3 = 19" AFF 1+4+2 or 1+3+2 = 30" AFF

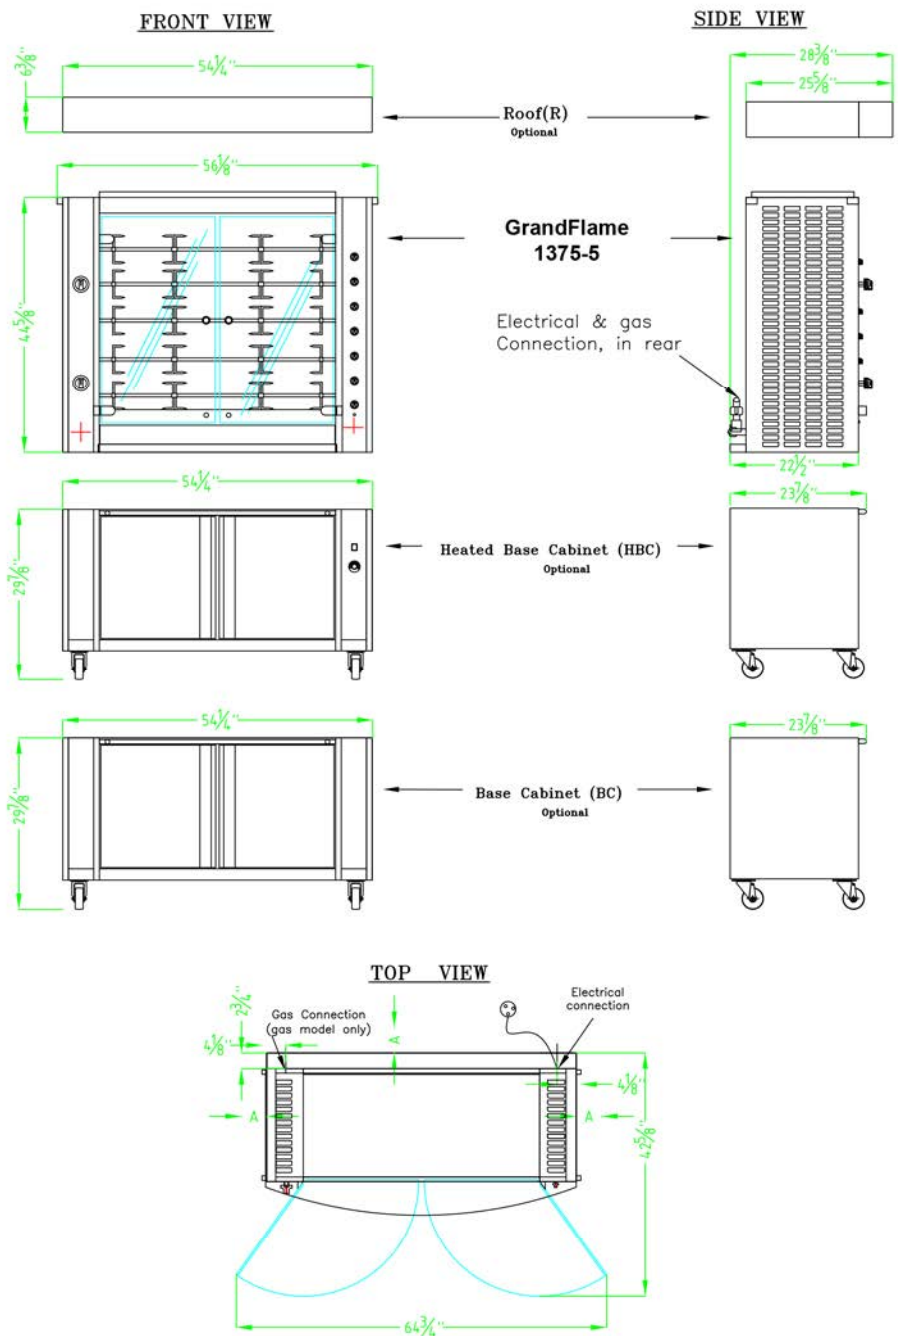

WEIGHT	NOTE	INSTALLATION REQUIREMENTS:	CLEARANCE:	PRODUCT CAPACITY:
- Roof: 20 Lbs - Rotisserie: 418 Lbs - Base Cabinet: 154 Lbs - Heated base cabinet: 165 Lbs - Packing: 70 Lbs	- No. of motors: 5 - No. of spits: 5 - No. of glass doors: 2 - No. of halogen lamps: 2	- Oven must be installed level. - Exhaust ventilation is required. Install on a non-combustible surface only - The oven must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.	- 6" (152mm) left, right, and rear	- On V-ANGLED SPITS (STANDARD): Up to 25 3-1/2 lb. chickens Up to 30 2-1/2 to 3 lb. chickens - For other spits please find the accessories specifications sheets

**WARRANTY CONDITIONS :**

Rotisol warrants its equipment to be free from defects in material and workmanship. Repairs must be performed by an authorized service company and it is the responsibility of the customer to return the defective parts to Rotisol France, inc. within 15 days (otherwise, the warranty will not be honored). The shipping charges for replacement parts, other than ground, will be at the customer's expense. This warranty does not cover glass door breakage and quartz or halogen lamp breakage, neither does it cover non-mechanical parts. This warranty does not apply to damages by accident, incorrect line voltage, fire, water, or other acts of god.