



Cam GoBox[®]



Cambro's latest line of insulated transporters are ideal for caterers looking for an ultra-lightweight transporter that offers superior temperature retention to protect food safety and excellent durability to withstand heavy commercial use, all at a budget-friendly price. Just take them and go!

CAMBRO
TRUSTED FOR GENERATIONS™

Cam GoBox® – Front Loader

4-SIDED HANDLING
Thoughtfully designed built-in handles along the top of the front loader units allow them to be easily carried from all four sides.

GENTLE OPEN AND CLOSE
Beveled door edges ensure door can be easily closed and latched.



DRIP-RESISTANT
Built-in condensation barrier helps front loaders to remain drip-resistant.



EASY IDENTIFICATION
A built-in label area keeps plastic menu tags (included for EPP300 and EPP400) in place for easy content identification or routing. StoreSafe® Labels can also be used with Cam GoBoxes.





FULL 270° ACCESS
Durable hinges and latches allow the door to open 270° and remain open securely to the side of the front loader for easy access to products. Latches keep door securely closed during transport.



STACKABILITY
Cam GoBoxes inter-stack and also stack with other major EPP brands.

Note: Best results will be achieved by loading food pans between 180° to 190°F. Loading metal food pans over 250°F will result in damage to the carrier.

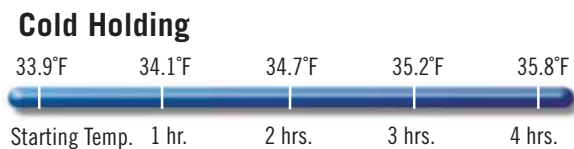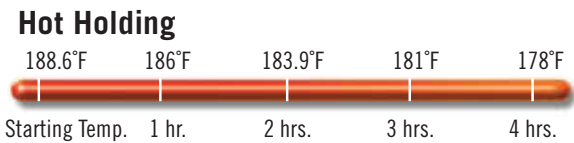

1 year warranty against manufacturer's defects.

EXTERIOR DIM. L 25.2" x W 17.3" x H 18.7"
INTERIOR DIM. L 21" x W 13" x H 14.6"
UNIT WEIGHT 7 lbs.
VOLUME 63.4 qt.
COLOR Black (110)

Case Pack: 1



EPP300

EXTERIOR DIM. L 25.2" x W 17.3" x H 24.6"
INTERIOR DIM. L 21" x W 13" x H 20.7"
UNIT WEIGHT 8.6 lbs.
VOLUME 90.9 qt.
COLOR Black (110)

Case Pack: 1



EPP400


Food Pan Capacity Guide



GN 1/1 FOOD PAN

DEPTH:	8"	6"	4"	2.5"
SERVING CAPACITY PER PAN:	26.9 qt.	20.6 qt.	13.7 qt.	9 qt.


EPP300




35.9 qt.



35.9 qt.




38.6 qt.




*41.2 qt.


EPP400




*35.9 qt.



35.9 qt.



*54.9 qt.



*61.8 qt.



*Indicates use without temperature maintenance tools.