



**TILT-OUT
FRONT GLASS**

MODELS


KBD-CG-(40, 50, 60, 80)-S
KBD-CG-(40, 50, 60, 80)-R
KBD-CG-(40, 50, 60, 80)-D

**CURVED GLASS BAKERY
DELI CASE**

Case holds 36°F to 40°F • Forced air refrigeration • Tempered tilt-out curved front glass • Tempered side glass and rear sliding doors
• LED lighting in canopy and under all shelves
Cases can be multiplexed



AUTODESK
REVIT

SELF CONTAINED	Model	O.A. Length Inches	Volume FT ³	Electrical - 115 volts						NEMA 115V Plug	Weight LBS.		Crate Size		
				Compressor			Lights Fans HTRS	Evap Pan	Total Amps		No Crate	With Crate			
			Front	H.P.	F.L.A.	L.R.A.							"L"	"W"	"H"
	KBD-CG-40-S	40-3/8	13.28	3/8	8.4	43	1.3	3.3	13.0	5-15P			375	514	43-3/8
	KBD-CG-50-S	52-1/8	17.50	1/2	9.6	49	1.5	3.3	14.4	5-20P	436	604	55-1/8	34-1/2	62-1/4
KBD-CG-60-S	60	20.31	1/2	9.6	49	1.6	3.3	14.5	5-20P	478	666	63	34-1/2	62-1/4	
KBD-CG-80-S	77-1/2	26.56	1/2	9.6	49	2.7	3.3	15.6	5-20P	557	787	80-1/2	34-1/2	62-1/4	

REMOTE	Model	O.A. Length Inches	115 Volts Total Amps	B.T.U.	Weight LBS.	
					No Crate	With Crate
	KBD-CG-40-R	40-3/8	0.82	2621	319	459
	KBD-CG-50-R	52-1/8	1.06	3110	381	549
	KBD-CG-60-R	60	1.10	3268	423	611
	KBD-CG-80-R	77-1/2	2.20	3987	502	732

NON-REFRIGERATED	Model	O.A. Length Inches	115 Volts Total Amps	NEMA 115V Plug	Weight LBS.	
					No Crate	With Crate
	KBD-CG-40-D	40-3/8	0.29	5-15P	319	459
	KBD-CG-50-D	52-1/8	0.33	5-15P	381	549
	KBD-CG-60-D	60	0.41	5-15P	423	611
	KBD-CG-80-D	77-1/2	0.46	5-15P	502	732

STANDARD FEATURES


Insulation-CFC free injected foam
 Interior-PVC coated steel gray
 Exterior-PVC coated steel silver
 Foamed polystyrene black end panels
 Height adjustable, tempered glass shelves can be tilted
 Temperature and defrost regulated by a digital controller
 Removable condensate evaporating pan for easy cleaning on self contained units
 Digital temperature display
 easy cleaning on self-contained units
 Anti-condensate system for front glass
 Cord and plug on self-contained and dry units
 Levelling feet

OPTIONAL FEATURES

Stainless steel exterior
 Stainless steel interior
 Other colors available
 Additional shelves
 Joining kit
 Partition or Product dividers
 Scale stand with 120 V receptacle
 Condensate evaporative pan for remote cases
 Casters-add 4-3/8" to height
 Stainless steel legs are adjustable from 5-1/8" to 7-5/8"

WARRANTY

One year parts and labor with an additional four years on the compressor (part only)

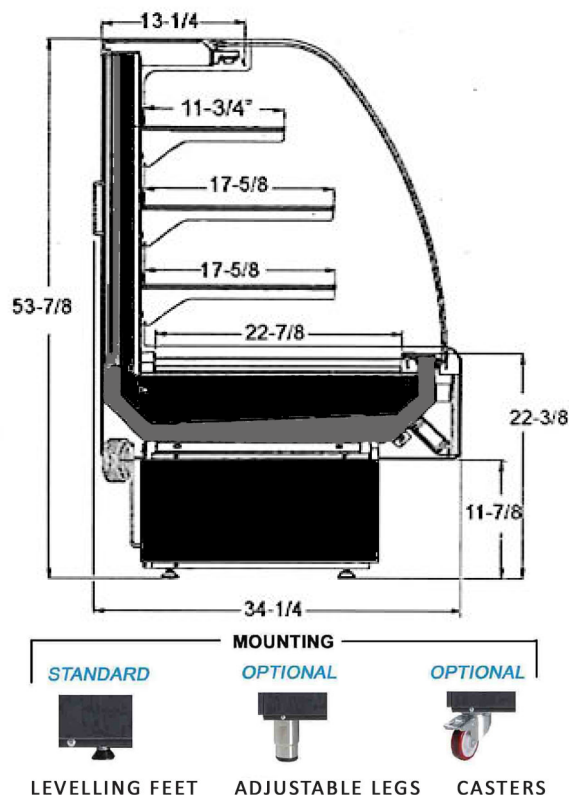

NOTE

These cases are engineered to operate in locations not exceeding 75°F and 55% R.H. These cases are designed to operate using R404a refrigerant. Alternate refrigerants available by special order. O.A. length includes (2) ends at 1-1/2" each. Ventilation grills at front and back cannot be blocked. B.T.U.'s are calculated at 14°F (evaporator) and 90°F (ambient). Remote cases are provided with an expansion valve and a liquid solenoid for pump down cycle. On remote cases, if no floor drain is provided, a condensate evaporating pan must be ordered and 3.3 amps added to the amp load. Remote cases must be hard wired.

USA Tel: 786.600.4687 / Toll Free: 844.218.8477
 Fax: 786.661.4100

Canada Tel: 514.737.9701 / Toll Free: 888.275.4538
 Fax: 514.342.3854 / Toll Free: 877.453.8832

sales@mvpgroupcorp.com / mvpgroupcorp.com