

# SCCG50 & SCCP50 – 50 lb Gourmet Clear Ice Machine

SCCG50 & SCCP50 – 50 lb Gourmet Clear Ice Machine

## Brilliance™ Under-Counter Gourmet Ice Machine



### Features

- 15" cabinet width
- Produces up to 65 lbs. of gourmet ice in 24 hours
- User-friendly control panel informs whether power is on, alerts a no-water condition, and a time to clean reminder
- Uses less energy and water compared to 30 lb models
- Indoor & Outdoor rated
- Accepts custom wood panels to match existing cabinetry
- LED illuminated bin
- Articulating hinge system
- Available with built-in drain pump
- Field reversible door

### 24 Hour Ice Production & Storage Capacity

70°F/21°C Air 50°F/10°C Water lb / kg	90°F/32°C Air 70°F/21°C Water lb / kg	Bin Storage Capacity lb / kg
65 / 30	48 / 22	26 / 12



**Control Board**



**Water Sensor**



**Scoop**



### Gourmet Clear Ice




Gourmet Cube  
1" x 1½" x 1¼"  
(2.54 x 2.86 x 3.18 cm)

Large, slow-melting ice form, ideal for mixed drinks.

### Warranty

- 1 years parts and labor on all components.
- 5 years parts on the compressor only.

Warranty valid in North America.

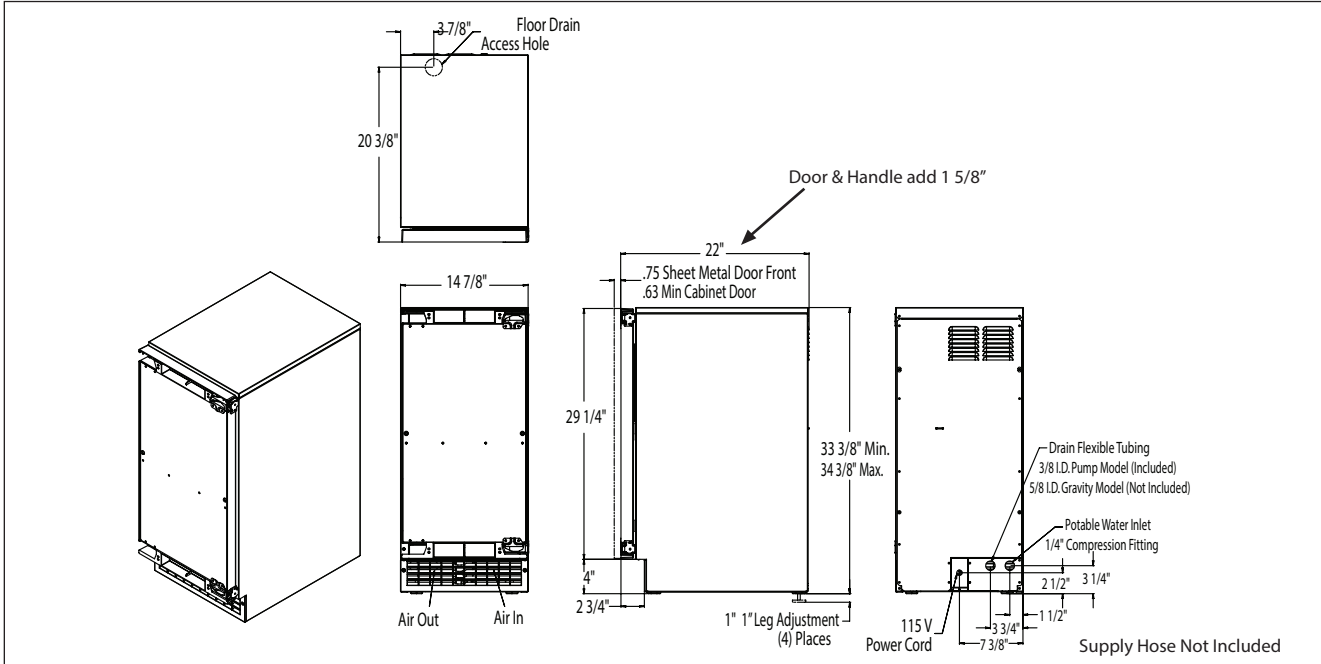

**All Models**

24 Hour Ice Production:  
(70 deg. Air/50 deg. Water)  
65 lb / 30 kg

(90 deg. Air / 70 Deg. Water)  
50 lb / 23 kg

Bin Storage Capacity:  
26 lb / 12 kg

Condenser Type:  
Air

Basic Electrical:  
(Volts/Hz/Phase)  
115/60/1

Amps:  
5

Maximum Fuze Size:  
15


Refrigerant:  
R-134A

Dimensions (W x D x H):  
Unit (without legs adjusted):  
14.875" x 22" x 33.375"  
(37.8 x 55.9 x 84.78 cm)

Shipping Carton:  
18" x 28" x 38"  
(45.7 x 71.1 x 96.5 cm)

**Specifications**

Model	Finish Cabinet / Front	Drain Type	Shipping Weight lb / kg
SCCG50MB-1SU	Stainless Steel / Unfinished	Gravity	113 / 51
SCCP50MB-1SU	Stainless Steel / Unfinished	Pump	118 / 54
SCCG50MB-1SS	Stainless Steel / Stainless Steel	Gravity	122 / 55
SCCP50MB-1SS	Stainless Steel / Stainless Steel	Pump	127 / 58

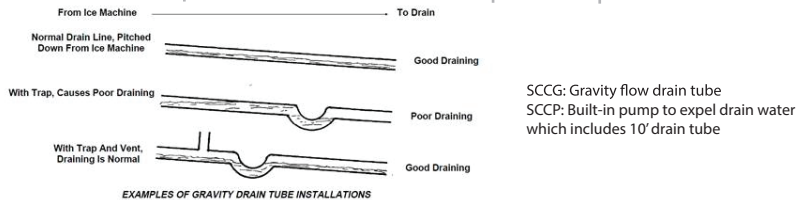

**Accessories**

Model	Description	Shipping Weight lb / kg
KDFS	Stainless Steel Door Front Kit	12 / 5.5
KSSKP	Stainless Steel Kick Plate Cover	5 / 2.26
KATB	Anti-Tip Bracket Kit	2 / 0.9
KDFR	Retro-Fit Door Front Kit	8 / 3.6

**Operating Requirements**

	Minimum	Maximum
<b>Air Temperatures</b>	50°F (10°C)	100°F (38°C)
<b>Water Temperatures</b>	40°F (4.4°C)	100°F (38°C)
<b>Water Pressures</b>	20 PSIG (1 bar)	80 PSIG (5 bar)
<b>Electrical Voltage</b>	-10%	+10%

Machine requires voltage indicated on rating name plate. Failures caused by improper voltage are not considered factory defects. Scotsman products, except model SCCG50MB-1SS & SCCP50MB-1SS, SCN60 are not designed for outdoor installations nor for installation where air temperatures fall below 50°F, or exceed 100°F, nor where water temperatures fall below 40°F, or exceed 100°F. Extended periods of operation at temperatures exceeding these limitations constitute misuse under the terms of Scotsman Manufacturer's Limited Warranty, resulting in a loss of warranty coverage. Refer to owner's manual for all installation requirements. Please note: when installed in a corner, the door swing may be limited due to handle contact with the wall or cabinet face.