



STEP UP HOT PLATES



JHPE-2-218



JHPE-3-224 shown with ST-24

MODEL NO.	DESCRIPTION
<input type="checkbox"/> JHPE-2-218	18" WIDE, 2 BURNERS FRONT, 2 AT REAR
<input type="checkbox"/> JHPE-2-224	24" WIDE, 2 BURNERS FRONT, 2 AT REAR
<input type="checkbox"/> JHPE-2-324	24" WIDE, 2 BURNERS FRONT, 3 AT REAR
<input type="checkbox"/> JHPE-3-224	24" WIDE, 3 BURNERS FRONT, 2 AT REAR
<input type="checkbox"/> JHPE-3-324	24" WIDE, 3 BURNERS FRONT, 3 AT REAR
<input type="checkbox"/> JHPE-3-336	36" WIDE, 3 BURNERS FRONT, 3 AT REAR
<input type="checkbox"/> JHPE-3-436	36" WIDE, 3 BURNERS FRONT, 4 AT REAR
<input type="checkbox"/> JHPE-4-336	36" WIDE, 4 BURNERS FRONT, 3 AT REAR
<input type="checkbox"/> JHPE-4-436	36" WIDE, 4 BURNERS FRONT, 4 AT REAR
<input type="checkbox"/> FLOOR MODEL	ADD "-F" TO END OF MODEL NUMBER

Example: JHPE-3-436-F: Floor model 3 front burners, 4 rear burners step up hot plate, 36" wide

STANDARD FEATURES

- Stainless steel sides, front, plate shelf and front of elevated rear burner housing
- 15,000 or 27,500 BTU cast iron open burners
- Heavy steel top plate with easy lift-off top plates
- Elevated "step up" rear burners
- Infinite control manual gas valves at each burner for precise heat control.
- 14 gauge stainless steel all welded construction
- Stainless steel legs welded into the frame
- High capacity 14 gauge welded drip tray
- Stainless steel gas tubing throughout
- Stainless steel pilot tips resist corrosion
- 3/4" gas regulator, included

OPTIONS & ACCESSORIES

- Stainless steel 8" extended plate shelf
- 8" deep cutting board, Poly
- 6" casters, front two locking (floor models only)
- 36" flex hose with quick disconnect & restraining device
- 48" flex hose with quick disconnect & restraining device

DESCRIPTION

Hot plate to be Model # JHPE-_____ manufactured by Jade Range. To have two 15,000 BTU/hr or 27,500 BTU/hr cast iron open burners per 12" section with one 12" x 24" lift-off cast iron top grate. Each burner controlled by infinite gas valves. 14 gauge stainless steel all welded construction with stainless steel front, plate shelf, pilot tips, gas tubing throughout and legs with adjustable feet. Each burner furnished with one stainless steel pilot. Provide 14 gauge welded drip tray. Unit to be provided with 3/4" gas regulator.

SPECIFY TYPE OF GAS WHEN ORDERING.


SPECIFY ALTITUDE WHEN ABOVE 2,000 FT.



WWW.JADERANGE.COM

JADE RANGE, LLC., A MIDDLEBY COMPANY • 2650 Orbiter Street • Brea, CA 92821 • PHONE: 800-884-5233 FAX: 714-961-2550
Note: In line with their policy to continually improve products, Jade reserves the right to change materials and specifications without notice. PRINTED IN USA

STEP UP HOT PLATES

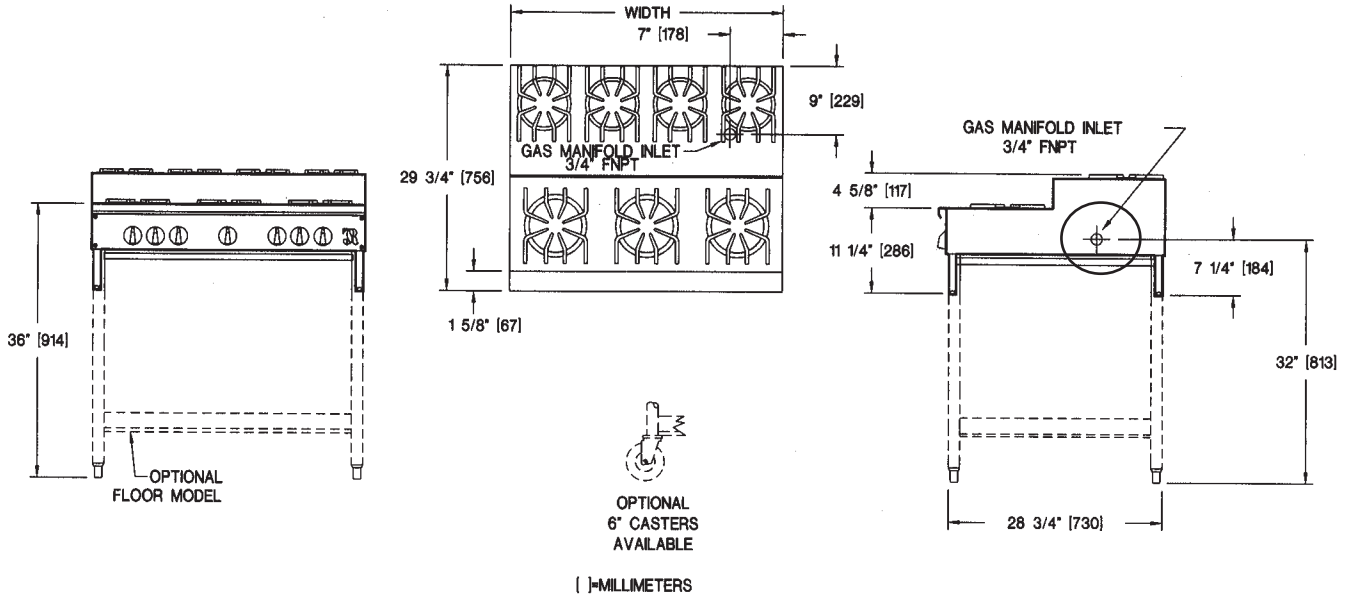

MODEL	BURNERS	BTUS	WIDTH	DEPTH	HEIGHT	APPX. SHP. WT.	APPX. CUBE COUNTER/FLOOR
JHPE-1-112	1/1	55,000	12"	29-3/4"	SEE DRAWING	95 LBS.	8/NA
JHPE-2-218	2/2	60,000	18"	29-3/4"	SEE DRAWING	125LBS.	11/NA
JHPE-2-224*	2/2	110,000	24"	29-3/4"	SEE DRAWING	155 LBS.	13/24
JHPE-2-324*	2/3	100,000	24"	29-3/4"	SEE DRAWING	160 LBS.	13/24
JHPE-3-224*	3/2	100,000	24"	29-3/4"	SEE DRAWING	160 LBS.	13/24
JHPE-3-324*	3/3	90,000	24"	29-3/4"	SEE DRAWING	170 LBS.	13/24
JHPE-3-336*	3/3	165,000	36"	29-3/4"	SEE DRAWING	220 LBS.	21/38
JHPE-4-336*	4/3	142,500	36"	29-3/4"	SEE DRAWING	220 LBS.	21/38
JHPE-3-436*	3/4	142,500	36"	29-3/4"	SEE DRAWING	220 LBS.	21/38
JHPE-4-436*	4/4	120,000	36"	29-3/4"	SEE DRAWING	230 LBS.	21/38

* For floor model add "-F" to end of Model #.

NOTE: SPECIFY TYPE OF GAS WHEN ORDERING.

UTILITY INFORMATION:

- 3/4" Connection
- Required operating pressure:
Natural Gas 5" W.C. minimum
Propane Gas 10" W.C. minimum
14" W.C. maximum

Note: This unit must be connected with the gas appliance regulator supplied.