



# Water Appliance Connectors

## HW-4B-24

TAG:

SAFETYLINK Water Appliance Connector

### Architect/Engineering Specifications:



24" coated water connector hose (blue) with 3/8" NPT outlet connection and 3/8" NPT female quick-disconnect. Certified to ASME A112.18.1 / CSA B125.1, NSF 61- Section 9, NSF 372 and NSF 2.

Job Name \_\_\_\_\_

Model Specified \_\_\_\_\_ Quantity \_\_\_\_\_

Variations Specified \_\_\_\_\_

Date \_\_\_\_\_

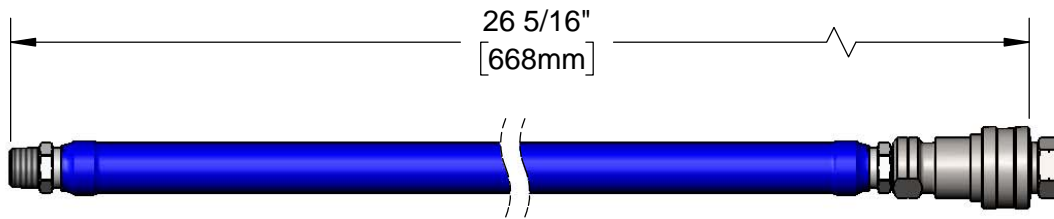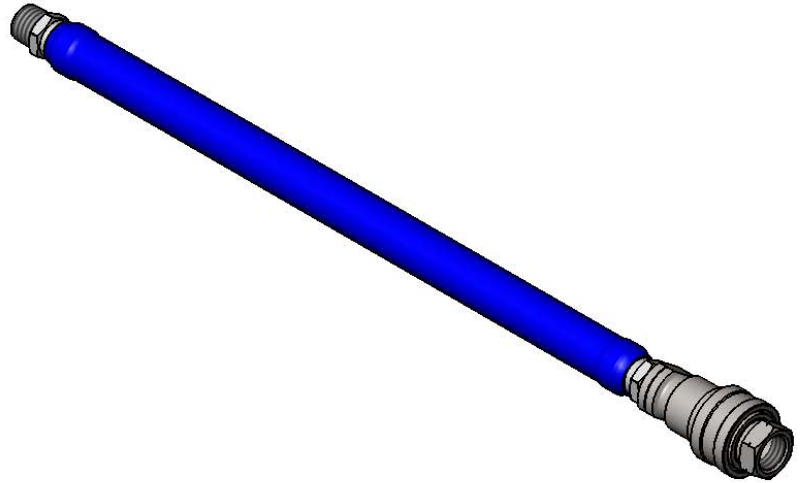

### Features & Benefits:

- 24" coated water connector hose (blue)
- 3/8" NPT male welded fitting ends
- 3/8" NPT female quick disconnect
- Extruded coating
- Stainless steel braided hose
- Material: Extruded coated stainless steel braids

### Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 2
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)

**Warranty:** Five Year (Limited)

### Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40 °F - 175 °F
- Flow Rate: 13.54 GPM @ 60 psi



T&S BRASS AND BRONZE WORKS, INC.



• 2 Saddleback Cove • Travelers Rest, SC 29690  
 Ph 800-476-4103 • Fax 864-834-3518  
 • Simi Valley, CA • Ph 800-423-0150 • www.tsbrass.com

Date: 06/23/17