



Induction Technology



Cooking Concepts for Professionals



100 Niantic Avenue; Suite 104, Providence, RI 02907  
Tel: (401) 273 - 3300 Fax: (401) 273 - 3328  
Email: sales@equipex.com  
www.equipex.com

## Bioline

*BRIC 2500/3000/3600 - 208/240 V*

- ◆ Durable vitroceramic glass
- ◆ Either 2500, 3000 or 3600 watts - 50/60 Hz
- ◆ Temperature in F° or 4 digit power level display
- ◆ Stainless steel casing
- ◆ 110 temperature levels (C°) / 198 temperature levels (F°)
- ◆ Capacitive Touch control panel: On/Off + (+/-) + 2 Presets + Timer (99 min)
- ◆ 25 power levels



*DWIC 3600 - 208/240 V*

*BWIC 3600 - 208/240 V*



- ◆ Durable vitroceramic - Wok
- ◆ 3600 watts - 50/60 Hz
- ◆ Stainless steel casing
- ◆ Capacitive Touch control panel: On/Off + (+/-) with 2 digits display + 3 Presets + Timer (99 min) + 25 power levels
- ◆ Uniform temperature at bottom and sides
- ◆ Stainless steel edge frame protects glass and pan

# Exclusive Drop-in

**DRIC 2500/3000/3600 - 208/240 V**

- ◆ Durable vitroceramic glass
- ◆ Either 2500, 3000 or 3600 watts - 50/60 Hz
- ◆ Capacitive Touch control panel: On/Off + (+/-) + 2 Presets + Timer (99 min)
- ◆ Remote control panels available



# Griddles

**BGIC 3000/3600 - GLP6000 - DGIC 3000/3600**


- ◆ Multi-layer griddle surface
- ◆ Capacitive touch controls
- ◆ 12 temperature levels
- ◆ Power output: 3000 - 6000 WATTS
- ◆ preheat to 400°F in 2 minutes
- ◆ Easy to clean
- ◆ 1 or 2 zone countertop
- ◆ 1 zone drop-in



# Buffet

**GL 650/1800/3000DI - 120 V or 208/240 V**

- ◆ Durable vitroceramic glass
- ◆ 650/1800/3000 watts - 50/60 Hz
- ◆ Capacitive Touch control panel: On/Off + (+/-) + Timer (99 min)
- ◆ Option: Remote control panel - 9 power levels (GL650DI) - 20 power levels (GL1800/3000DI)

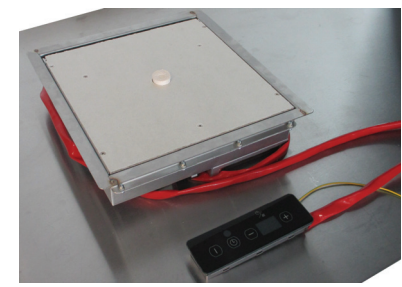

**GL 650UC - 120 V**

- ◆ Designed for under counter-top use with 3/4" Stone Countertop
- ◆ 650 watts - 50/60 Hz
- ◆ Remote Control panel: On/Off + (+/-) + lock
- ◆ 20 power levels
- ◆ Furnished with Induc'mate spacer to protect countertop

# Geoline

**GL 1800PBS or GL 1800/3000C - 120 V or 208/240 V**

- ◆ Durable vitroceramic glass
- ◆ 1800/3000 watts - 50/60 Hz
- ◆ Stainless steel casing
- ◆ Microtouch push button controls: On/Off + 20 power levels + (27) temperature levels + Timer
- ◆ Capacitive Touch controls: On/Off + 20 power levels or temperature + Timer



**GL2-3500/5000/6000/7000F - 208/240 V**

- ◆ Durable vitroceramic glass
- ◆ Two induction coils
- ◆ 3500/5000/6000/7000 watts - 50/60 Hz
- ◆ Stainless steel casing
- ◆ Capacitive Touch controls: On/Off + 20 power levels or temperature + Timer (99 min)

**GL2-3500/5000/6000/7000 - 208/240 V**

- ◆ Durable vitroceramic glass
- ◆ Two induction coils
- ◆ 3500/5000/6000/7000 watts - 50/60 Hz
- ◆ Stainless steel casing
- ◆ Capacitive Touch control panel: On/Off + 20 power levels + Timer (99 min)



**GL2-3500/5000/6000/7000DIR - 208/240 V**

- ◆ Durable vitroceramic glass
- ◆ Two induction coils
- ◆ 3500/5000/6000/7000 watts - 50/60 Hz
- ◆ Stainless steel casing
- ◆ Integral flush mounted stainless steel mounting frame
- ◆ Microtouch push button controls
- ◆ On/Off + 20 power levels + Timer + Boost

