



Strip Heater Solutions

Cafeterias • Buffets • Supermarkets & Delis
Restaurants & Cafés • Clubs & Bars



GRAL-48 pg. 4



GRAH-42D with 6" spacer and optional non-adjustable tubular stands pg. 6



GRAHL-96D with optional *Designer* color and non-adjustable tubular stands pg. 7



GRAML-60D with optional non-adjustable tubular stands pg. 12



GRNH-48 with standard angle brackets and optional *Designer* color (sneeze guards as shown not available) pg. 16



GRAIHL-48 (requires Remote Control Enclosure) pg. 17



GR2AHL-84 with optional *Designer* color housing and optional sneeze guards pg. 21



UGA-24D in Gloss finish Radiant Red pg. 26



UGAH-36D with 3" spacer pg. 26




Ordering Instructions

GRA-72,
GRAH-72 or
GRAM-72



GRA-72D,
GRAH-72D or
GRAM-72D



GRAL-72,
GRAHL-72 or
GRAML-72




GRAL-72D,
GRAHL-72D or
GRAML-72D



GRAIH-60




GRAIH-60D




GRAIHL-60



GRAIHL-60D




UGA-36 or
UGAH-36



UGA-36D or
UGAH-36D



UGAL-36 or
UGAHL-36



UGAL-36D or
UGAHL-36D



Glo-Ray® Infrared Metal Sheathed Strip Heaters: (pages 3-13)

1. Choose a length
2. Single or dual warmer
3. Standard, high or max watt
4. Lights or no lights
5. Voltage: 120, 208, 240 or 120/208, 120/240 for units with lights
6. Choose control option.
Remote installation recommended (required on some GRAM models)*

Infra-Black® Strip Heaters: (pages 17-19)

1. Choose a length
2. Single or dual warmer
3. Lights or no lights
4. Voltage: 120, 208, 240 or 120/208, 120/240 for units with lights
5. Choose control option.
Remote installation is recommended*

Ultra-Glo® Ceramic Strip Heaters: (pages 25-27)

1. Choose a length
2. Single or dual warmer
3. Standard or high watt
4. Lights or no lights
5. Voltage: 120, 208, 240 or 120/208, 120/240 for units with lights
6. Choose control option.
Remote installation is recommended*



Glo-Ray® Narrow Halogen Strip Heaters: (page 14-15)

1. Choose a length
2. Voltage: 120
3. Includes remote control enclosure

GRN-24 or
GRNH-24




Glo-Ray® Narrow Strip Heaters: (page 16)

1. Choose a length
2. Standard or high watt
3. Voltage: 120, 208, 240
4. Choose control option.
Remote installation is recommended*


Glo-Ray® Designer Strip Heaters: (pages 20-24)

1. Choose a length
2. Single or dual warmer
3. Standard or high watt
4. Lights or no lights
5. Voltage: 120, 208, 240 or 120/208, 120/240 for units with lights
6. Choose control option.
Remote installation only*
7. Choose inset panel and corner cap color

GR2A-36
or GR2AH-36




GR2A-36D
or GR2AH-36D



GR2AL-36
or GR2AHL-36



GR2AL-36D
or GR2AHL-36D



Typical Conduit Connection

Glo-Ray® Strip Heaters come standard with right angle attached 3' conduit and 42" leads on back of unit (Narrow Strip Heater standard with 6" leads, no conduit, GR2A models exit posts only).

* Multiple Strip Heaters may be connected to one RMB2 if the combined current draw of the warmers are less than the rating for the RMB2.

Glo-Ray® Infrared Strip Heaters

Safely hold the temperature of your product without drying out or further cooking food with Hatco's Glo-Ray® Infrared Strip Heaters. The end result is hot, fresh food that's ready-to-serve. The continuous aluminum housing and heavy-duty mountings ensure the durability and quality of Hatco products. Heavy-duty stainless steel housings are available (see next page).

Toggle Switch: Max. 15 amps
Infinite Switch: Max. 12.2 amps

- Ensures maximum flavor, safety and holding time
- Even heat distribution – no “cold spots”
- Sturdy extruded aluminum housings that do not sag, from 18" to 144" (12")
- Reflector does not blacken, maintaining a consistent heat pattern
- Reinforced wire guard provides operator safety without affecting heat distribution
- Heavy-duty insulation minimizes heat loss
- All units single phase only
- Pre-focused heat pattern bathes entire holding surface
- Standard and high watt models available
- Optional sneeze guards (excludes stainless steel models)

- Available with lights (shatter resistant incandescent lights or optional Halogen lights - excludes stainless steel models)
- Available in stainless steel housing 18" to 96"



GRAH-36 High watt, toggle controlled with 2-S hooks, 2-6" chains (optional cord and plug attached)

ALUMINUM STRIP HEATERS WITH CONDUIT (Standard Watt)

Model	Width	Voltage		Watts	Ship Weight
		Single Phase Only			
Standard Watt					
GRA-18	18"	120, 208, 240		250	6 lbs.
GRA-24	24"	120, 208, 240		350	7 lbs.
GRA-30	30"	120, 208, 240		450	8 lbs.
GRA-36	36"	120, 208, 240		575	9 lbs.
GRA-42	42"	120, 208, 240		675	10 lbs.
GRA-48	48"	120, 208, 240		800	11 lbs.
GRA-54	54"	120, 208, 240		925	13 lbs.
GRA-60	60"	120, 208, 240		1050	14 lbs.
GRA-66	66"	120, 208, 240		1160	16 lbs.
GRA-72	72"	120, 208, 240		1275	17 lbs.
GRA-84*	84"	120, 208, 240		1500	19 lbs.
GRA-96*	96"	120, 208, 240		1725	21 lbs.
GRA-108	108"	120, 208, 240		1850	23 lbs.
GRA-120	120"	120, 208, 240		2100	26 lbs.
GRA-132	132"	120, 208, 240		2320	30 lbs.
GRA-144	144"	120, 208, 240		2550	33 lbs.

▼ When using an infinite control with 120V Model, additional switch(es) and tandem (end-to-end) elements are required, cord not available.
▲ 120V Models require additional switches and tandem (end-to-end) elements.

All Infrared Strip Heaters Feature:

Toggle Switch (max. 15 amps) Location: Chef's left side (unless otherwise specified).
Leads: 3' conduit with leads – server's right. NEMA 5-15P cord available on 120 volt Models 72" or less with C-leg, T-leg stand or chain-hook mount. GRAH-66 and GRAH-72 require NEMA 5-20P cord for Canada.
Dimensions: 18"-144"W x 6"D x 2½"H.

OPTIONS AND ACCESSORIES – PAGE 5
RECOMMENDED MOUNTING HEIGHTS – PAGE 28

ONE YEAR ON-SITE PARTS AND LABOR WARRANTY, PLUS ONE ADDITIONAL YEAR PARTS-ONLY WARRANTY ON ALL GLO-RAY® METAL-SHEATHED HEATING ELEMENTS.

GRAH-XX

Glo-Ray _____
Aluminum Housing _____
_____ Width (inches)
H = High Wattage
No Character = Standard Wattage

ALUMINUM STRIP HEATERS WITH CONDUIT (High Watt)

Model	Width	Voltage		Watts	Ship Weight
		Single Phase Only			
High Watt					
GRAH-18	18"	120, 208, 240		350	6 lbs.
GRAH-24	24"	120, 208, 240		500	7 lbs.
GRAH-30	30"	120, 208, 240		660	8 lbs.
GRAH-36	36"	120, 208, 240		800	9 lbs.
GRAH-42	42"	120, 208, 240		950	10 lbs.
GRAH-48	48"	120, 208, 240		1100	11 lbs.
GRAH-54	54"	120, 208, 240		1250	13 lbs.
GRAH-60	60"	120, 208, 240		1400	14 lbs.
GRAH-66*	66"	120, 208, 240		1560	16 lbs.
GRAH-72*	72"	120, 208, 240		1725	17 lbs.
GRAH-84*	84"	120, 208, 240		2050	19 lbs.
GRAH-96*	96"	120, 208, 240		2400	21 lbs.
GRAH-108	108"	120, 208, 240		2500	23 lbs.
GRAH-120	120"	120, 208, 240		2800	26 lbs.
GRAH-132	132"	120, 208, 240		3120	30 lbs.
GRAH-144	144"	120, 208, 240		3450	33 lbs.

ALUMINUM STRIP HEATERS WITH S HOOKS, CHAINS AND CORD AND PLUG ATTACHED




Model	Order No.	Width	Voltage		Watts	Ship Weight
			Single Phase Only			
Standard Watt - Toggle Controlled with S Hooks and Chain, Cord and Plug Attached						
GRA-24	GRA24120TCCS	24"	120		350	7 lbs.
GRA-36	GRA36120TCCS	36"	120		575	9 lbs.
GRA-48	GRA48120TCCS	48"	120		800	11 lbs.
GRA-60	GRA60120TCCS	60"	120		1050	14 lbs.
High Watt - Toggle Controlled with S Hooks and Chain, Cord and Plug Attached						
GRAH-18	AH18120TCCS	18"	120		350	6 lbs.
GRAH-24	AH24120TCCS	24"	120		500	7 lbs.
GRAH-30	AH30120TCCS	30"	120		660	8 lbs.
GRAH-36	AH36120TCCS	36"	120		800	9 lbs.
GRAH-42	AH42120TCCS	42"	120		950	10 lbs.
GRAH-48	AH48120TCCS	48"	120		1100	11 lbs.
GRAH-60	AH60120TCCS	60"	120		1400	14 lbs.
GRAH-72*	AH72120TCCS.1	72"	120		1725	17 lbs.
High Watt - Infinite Controlled with S Hooks and Chain, Cord and Plug Attached						
GRAH-24	AH24120ICCS	24"	120		500	7 lbs.
GRAH-36	AH36120ICCS	36"	120		800	9 lbs.
GRAH-48	AH48120ICCS	48"	120		1100	11 lbs.
GRAH-60	AH60120ICCS	60"	120		1400	14 lbs.


* Not available for Canada



Strip Heater Solutions

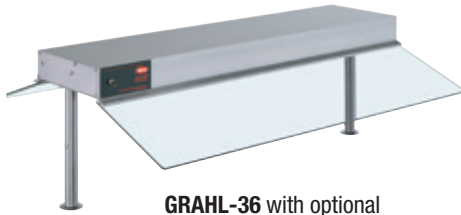

GRAHL-36 with optional sneeze guards and adjustable tubular stands

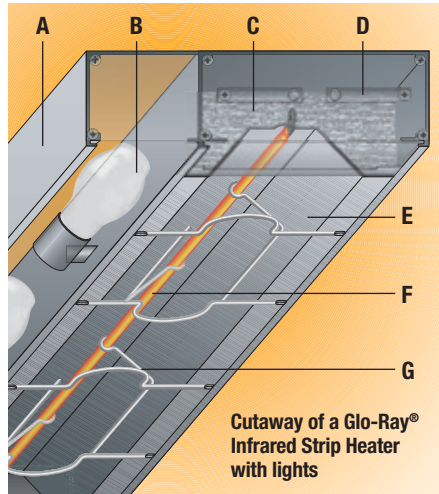

Cutaway of a Glo-Ray® Infrared Strip Heater with lights

- A** Stainless steel or sturdy aluminum housings that do not sag, from 18" up to 12' in 6" increments. Stainless units available in single units without lights, up to 96" in width
- B** Shatter-resistant incandescent lights (standard on GRAL/GRAHL), optional halogen bulb available
- C** Heavy-duty insulation minimizes heat loss
- D** Standard brackets are provided
- E** Aluminized reflector retains full heat intensity and directs more heat towards the edges of the holding surface
- F** Metal sheathed heating element is guaranteed against burnout and breakage for two years
- G** Wire guard supports the heating element and provides operator safety without affecting heat distribution

ALUMINUM STRIP HEATERS WITH LIGHTS

Model	Bulbs	Width	Voltage		Watts	Ship Weight
			Single Phase Only			
Standard Watt						
GRAL-18	2	18"	120, 120/208, 120/240		370	9 lbs.
GRAL-24	2	24"	120, 120/208, 120/240		470	10 lbs.
GRAL-30	2	30"	120, 120/208, 120/240		570	11 lbs.
GRAL-36	3	36"	120, 120/208, 120/240		755	13 lbs.
GRAL-42	3	42"	120, 120/208, 120/240		855	15 lbs.
GRAL-48	4	48"	120, 120/208, 120/240		1040	17 lbs.
GRAL-54	4	54"	120, 120/208, 120/240		1165	19 lbs.
GRAL-60	5	60"	120, 120/208, 120/240		1350	21 lbs.
GRAL-66	5	66"	120, 120/208, 120/240		1460	22 lbs.
GRAL-72	6	72"	120, 120/208, 120/240		1635	24 lbs.
GRAL-84 [▼]	7	84"	120, 120/208, 120/240		1920	28 lbs.
GRAL-96 [▼]	8	96"	120, 120/208, 120/240		2205	32 lbs.
GRAL-108	9	108"	120, 120/208, 120/240		2390	36 lbs.
GRAL-120	10	120"	120, 120/208, 120/240		2700	40 lbs.
GRAL-132	11	132"	120, 120/208, 120/240		2980	44 lbs.
GRAL-144	12	144"	120, 120/208, 120/240		3270	48 lbs.
High Watt						
GRAHL-18	2	18"	120, 120/208, 120/240		470	9 lbs.
GRAHL-24	2	24"	120, 120/208, 120/240		620	10 lbs.
GRAHL-30	2	30"	120, 120/208, 120/240		780	11 lbs.
GRAHL-36	3	36"	120, 120/208, 120/240		980	13 lbs.
GRAHL-42	3	42"	120, 120/208, 120/240		1130	15 lbs.
GRAHL-48	4	48"	120, 120/208, 120/240		1340	17 lbs.
GRAHL-54	4	54"	120, 120/208, 120/240		1490	19 lbs.
GRAHL-60	5	60"	120, 120/208, 120/240		1700	21 lbs.
GRAHL-66 [▼]	5	66"	120, 120/208, 120/240		1860	22 lbs.
GRAHL-72 [▼]	6	72"	120, 120/208, 120/240		2085	24 lbs.
GRAHL-84 [▲]	7	84"	120, 120/208, 120/240		2470	28 lbs.
GRAHL-96 [▲]	8	96"	120, 120/208, 120/240		2880	32 lbs.
GRAHL-108	9	108"	120, 120/208, 120/240		3040	36 lbs.
GRAHL-120	10	120"	120, 120/208, 120/240		3400	40 lbs.
GRAHL-132	11	132"	120, 120/208, 120/240		3780	44 lbs.
GRAHL-144	12	144"	120, 120/208, 120/240		4170	48 lbs.

▼ When using an infinite control with 120V Model, additional switch(es) and tandem (end-to-end) elements are required, cord not available.

▲ 120V Models require additional switches and tandem (end-to-end) elements.

All Infrared Aluminum Strip Heaters with Lights Feature:

Toggle Switch (max. 15 amps) Location: Chef's left side – light side (unless otherwise specified).

Leads: 3' conduit with leads – server's right. NEMA 5-15P cord available on 120 volt Models 72" or less with C-leg, T-leg stand or hook-chain mount. GRAHL-54, GRAHL-60, GRAL-66 & GRAL-72 require NEMA 5-20P cord for Canada. GRAHL-66 & GRAHL-72 require NEMA 5-20P cord - not available for Canada.

Dimensions: 18"-144"W x 9"D x 2½"H.

OPTIONS AND ACCESSORIES – PAGE 5

RECOMMENDED MOUNTING HEIGHTS – PAGE 28

STAINLESS STEEL STRIP HEATERS

Model	Width	Voltage		Watts	Ship Weight
		Single Phase Only			
Standard Watt					
GR-18	18"	120, 208, 240		250	7 lbs.
GR-24	24"	120, 208, 240		350	7 lbs.
GR-36	36"	120, 208, 240		575	10 lbs.
GR-48	48"	120, 208, 240		800	12 lbs.
GR-60	60"	120, 208, 240		1050	15 lbs.
GR-72	72"	120, 208, 240		1275	19 lbs.
GR-96*	96"	120, 208, 240		1725	24 lbs.
High Watt					
GRH-18	18"	120, 208, 240		350	7 lbs.
GRH-24	24"	120, 208, 240		500	7 lbs.
GRH-36	36"	120, 208, 240		800	10 lbs.
GRH-48	48"	120, 208, 240		1100	12 lbs.
GRH-60	60"	120, 208, 240		1400	15 lbs.
GRH-72*	72"	120, 208, 240		1725	19 lbs.
GRH-96	96"	208, 240		2400	24 lbs.

* Infinite not available in 120V.

All Infrared Stainless Steel Strip Heaters Feature:

Toggle Switch (max. 15 amps) Location: Chef's left side.


Leads: 3' conduit with leads – server's right. NEMA 5-15P cord available on 120 volt Models 72" or less with C-leg, T-leg stand or chain-hook mount. GRH-72 requires NEMA 5-20P cord for Canada.

Dimensions: 18"-96"W x 6"D x 2¾"H.

Contact factory for stainless marine applications.

ONE YEAR ON-SITE PARTS AND LABOR WARRANTY, PLUS ONE ADDITIONAL YEAR PARTS-ONLY WARRANTY ON ALL GLO-RAY® METAL SHEATHED HEATING ELEMENTS.

STAINLESS STEEL MODELS ARE NOT AVAILABLE WITH LIGHTS, SNEEZE GUARDS OR AS DUAL OR TANDEM UNITS.

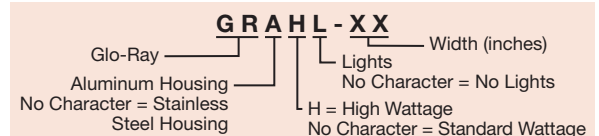



GRAHL-48
with optional
sneeze guard

OPTIONS (available at time of purchase only)

Designer Colors, Aluminum Models 18"-144" – Non-standard colors are non-returnable –

COLOR-6	6" Housing for GRA and GRAH Models (select color)				
COLOR-9	9" Housing for GRAL and GRAHL Models (select color)				
	RED Warm Red	GRAY Gray Granite	NAVY Navy Blue	COPPER Antique Copper	
	BLACK Black	WHITE White Granite	GREEN Hunter Green		

Gloss Finishes, Aluminum Models 18"-144" – Non-standard colors are non-returnable –

GLOSS-6	6" Housing for GRA and GRAH Models (select color)				
GLOSS-9	9" Housing for GRAL and GRAHL Models (select color)				
	RRED Radiant Red	GGRAY Glossy Gray	BBLACK Bold Black		
	GGOLD Gleaming Gold	BBLUE Brilliant Blue			

IND. LGT Indicator Light (Remote Control only on Stainless Steel units) (not available as Built-In with Tandem Element option)

Leads (extended beyond standard 3' Conduit) (must specify lead length) –

LEADS5	1'-5' Extended Electrical Leads
LEADS10	6'-10' Extended Electrical Leads
LEADS15	11'-15' Extended Electrical Leads
LEADS20	16'-20' Extended Electrical Leads
9.375BP1	9¾" Sneeze Guard (Aluminum Models only), one side
9.375BP2	9¾" Sneeze Guard (Aluminum Models only), two sides
14BP1	14" Sneeze Guard (Aluminum Models only), one side
14BP2	14" Sneeze Guard (Aluminum Models only), two sides
HAL	Halogen Bulb in lieu of standard Display Light (60 Watt) (Aluminum Models only)
LIGHTS-ADD'L	Extra Lamps – Installed (max. two per ft. less – one per foot is standard) (must be ordered with Remote Switches only) (Aluminum Models only)
3 ANEAL REFL	Bright Annealed Reflector for Lights with 3" Spacer (Aluminum Models only)
BLT INF	Infinite Control Built-In in lieu of Toggle (max. 12.2 Amps) (remote installation recommended)
REM INF	Remote Infinite Switches in lieu of Toggle (max. 12.2 Amps)
REM TOG	Remote Toggle Switches (max. 15 Amps)
RMB	Remote Control Enclosure (available in Designer Colors or Gloss Finishes – Non-standard colors are non-returnable) – (see page 29 and 30 for Models)
ATL	Adjustable Tubular Stands 10"-14" (not available in Designer Colors)
NTL-10, 12	Non-Adjustable Tubular Stands (specify 10" or 12" clearance)
NTL-14, 16	Non-Adjustable Tubular Stands (specify 14" or 16" clearance)
NTL-PAINT	Designer Color or Gloss Finish for Non-Adjustable Tubular Stands – Non-standard colors are non-returnable –
CL-LOW	C-Leg Stands Standard Watt – 10" clearance (for Models up to 6')
CL-HIGH	C-Leg Stands High Watt – 13½" clearance (for Models up to 6')
TL-10	T-Leg Stands – 10" clearance (for Standard Watt Models only up to 6')
TL-13	T-Leg Stands – 13½" clearance (for Models up to 6')
TL-16	T-Leg Stands – 16" clearance (for Models up to 6')
TL-18	T-Leg Stands – 18" clearance (for Models up to 6')
CAP	Attached 6' Cord and Plug Set (120V only) on Models up to 72" requires standard Chain Mount Kit (two S Hooks with two 6" Lengths of Chain) or add optional C-Leg Stands or T-Leg Stands (see specific Model for plug configuration)
CHAIN-HOOK	Two S Hooks with Two 6" Lengths of Chain

ACCESSORIES (available for purchase at any time)

ADJ-ANGLE	Adjustable Angle Brackets (GRA Models only) (see page 29 for illustration)
GR-ANGLE	Adjustable Angle Brackets (GR Models only) (see page 29 for illustration)
CHAIN 1	Chain Suspension (see page 29 for illustration)

COLORS AND FINISHES – PAGE 31



Glo-Ray® Dual Infrared Strip Heaters

Create a deeper holding area with Glo-Ray® Aluminum Dual Infrared Strip Heaters mounted side-by-side, keeping hot food at optimum serving temperatures. The pre-focused heat pattern directs heat from a metal-sheathed element across the entire holding surface. The continuous aluminum housing and heavy-duty mountings ensure the durability and quality of Hatco products.

- Ensures maximum flavor, safety and holding time
- Provides even heat distribution – no “cold spots”
- Sturdy extruded aluminum housings that do not sag, from 18" to 144" (12')
- Metal sheathed heating elements guaranteed against burnout and breakage for two years
- Reflector does not blacken, maintaining a consistent heat pattern
- Reinforced wire guard provides operator safety without affecting heat distribution
- 3" or 6" spacer available
- Heavy-duty insulation minimizes heat loss



GRAH-72D with optional *Designer* color, 6" spacer and tandem elements

GRA-36D with 3" spacer

Toggle Switch: Max. 15 amps
Infinite Switch: Max. 12.2 amps

NOTE: 120V Models may require additional switches.

ALUMINUM DUAL STRIP HEATERS

Model	Width	Voltage		Watts	Ship Weight
		Single Phase Only			
Standard Watt					
GRA-18D	18"	120, 208, 240		500	14 lbs.
GRA-24D	24"	120, 208, 240		700	16 lbs.
GRA-30D	30"	120, 208, 240		900	18 lbs.
GRA-36D	36"	120, 208, 240		1150	19 lbs.
GRA-42D	42"	120, 208, 240		1350	23 lbs.
GRA-48D	48"	120, 208, 240		1600	27 lbs.
GRA-54D	54"	120, 208, 240		1850	30 lbs.
GRA-60D	60"	120, 208, 240		2100	35 lbs.
GRA-66D	66"	120, 208, 240		2320	36 lbs.
GRA-72D	72"	120, 208, 240		2550	40 lbs.
GRA-84D [▼]	84"	120, 208, 240		3000	50 lbs.
GRA-96D [▼]	96"	120, 208, 240		3450	52 lbs.
GRA-108D	108"	120, 208, 240		3700	59 lbs.
GRA-120D	120"	120, 208, 240		4200	66 lbs.
GRA-132D	132"	120, 208, 240		4640	73 lbs.
GRA-144D	144"	120, 208, 240		5100	80 lbs.
High Watt					
GRAH-18D	18"	120, 208, 240		700	14 lbs.
GRAH-24D	24"	120, 208, 240		1000	16 lbs.
GRAH-30D	30"	120, 208, 240		1320	18 lbs.
GRAH-36D	36"	120, 208, 240		1600	19 lbs.
GRAH-42D	42"	120, 208, 240		1900	23 lbs.
GRAH-48D	48"	120, 208, 240		2200	27 lbs.
GRAH-54D	54"	120, 208, 240		2500	30 lbs.
GRAH-60D	60"	120, 208, 240		2800	35 lbs.
GRAH-66D [▼]	66"	120, 208, 240		3120	36 lbs.
GRAH-72D [▼]	72"	120, 208, 240		3450	40 lbs.
GRAH-84D [▲]	84"	120, 208, 240		4100	50 lbs.
GRAH-96D [▲]	96"	120, 208, 240		4800	52 lbs.
GRAH-108D	108"	120, 208, 240		5000	59 lbs.
GRAH-120D	120"	120, 208, 240		5600	66 lbs.
GRAH-132D	132"	208, 240		6240	73 lbs.
GRAH-144D	144"	208, 240		6900	80 lbs.

▲ 120V Models require additional switches and tandem (end-to-end) elements.

▼ When using an infinite control with 120V Model, additional switch(es) and tandem (end-to-end) elements are required.

All Aluminum Dual Strip Heaters Feature:

Toggle Switch (max. 15 amps) Location: Chef's left side (unless otherwise specified).

Leads: 3' conduit with leads – server's right.


Dimensions: with 3" Spacer (standard): 18"-144"W x 15"D x 2½"H.

with 6" Spacer: 18"-144"W x 18"D x 2½"H.

OPTIONS AND ACCESSORIES – PAGE 8


RECOMMENDED MOUNTING HEIGHTS – PAGE 28

ONE YEAR ON-SITE PARTS AND LABOR WARRANTY, PLUS ONE ADDITIONAL YEAR PARTS-ONLY WARRANTY ON ALL GLO-RAY® METAL SHEATHED HEATING ELEMENTS.



Glo-Ray® Dual Infrared Strip Heaters *continued*

- A** Shown with optional lights (shatter-resistant incandescent lights or halogen bulbs available)
- B** Sturdy extruded aluminum housings that do not sag, from 18" up to 144" (12')
- C** Reflector does not blacken, maintaining a consistent heat pattern
- D** Standard hanger tab is provided for under shelf or chain installation
- E** Heavy-duty insulation minimizes heat loss
- F** Metal sheathed heating element is guaranteed against burnout and breakage for two years
- G** Reinforced wire guard provides operator safety without affecting heat distribution

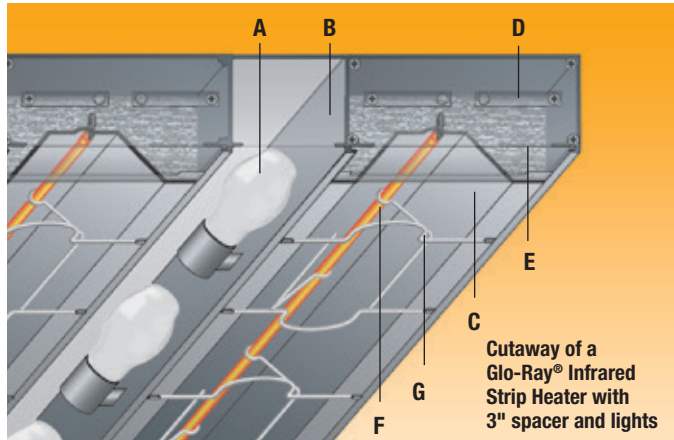

Toggle Switch: Max. 15 amps
Infinite Switch: Max. 12.2 amps

ALUMINUM DUAL STRIP HEATERS WITH LIGHTS


Model	Bulbs	Width	Voltage		Watts	Ship Weight
			Single Phase Only			
Standard Watt						
GRAL-18D	2	18"	120, 120/208, 120/240		620	14 lbs.
GRAL-24D	2	24"	120, 120/208, 120/240		820	16 lbs.
GRAL-30D	2	30"	120, 120/208, 120/240		1020	19 lbs.
GRAL-36D	3	36"	120, 120/208, 120/240		1330	22 lbs.
GRAL-42D	3	42"	120, 120/208, 120/240		1530	25 lbs.
GRAL-48D	4	48"	120, 120/208, 120/240		1840	29 lbs.
GRAL-54D	4	54"	120, 120/208, 120/240		2090	33 lbs.
GRAL-60D	5	60"	120, 120/208, 120/240		2400	37 lbs.
GRAL-66D	5	66"	120, 120/208, 120/240		2620	39 lbs.
GRAL-72D	6	72"	120, 120/208, 120/240		2910	42 lbs.
GRAL-84D▼	7	84"	120, 120/208, 120/240		3420	47 lbs.
GRAL-96D▼	8	96"	120, 120/208, 120/240		3930	56 lbs.
GRAL-108D	9	108"	120, 120/208, 120/240		4240	64 lbs.
GRAL-120D	10	120"	120, 120/208, 120/240		4800	72 lbs.
GRAL-132D	11	132"	120, 120/208, 120/240		5300	79 lbs.
GRAL-144D	12	144"	120, 120/208, 120/240		5820	86 lbs.
High Watt						
GRAHL-18D	2	18"	120, 120/208, 120/240		820	14 lbs.
GRAHL-24D	2	24"	120, 120/208, 120/240		1120	16 lbs.
GRAHL-30D	2	30"	120, 120/208, 120/240		1440	19 lbs.
GRAHL-36D	3	36"	120, 120/208, 120/240		1780	22 lbs.
GRAHL-42D	3	42"	120, 120/208, 120/240		2080	25 lbs.
GRAHL-48D	4	48"	120, 120/208, 120/240		2440	29 lbs.
GRAHL-54D	4	54"	120, 120/208, 120/240		2740	33 lbs.
GRAHL-60D	5	60"	120, 120/208, 120/240		3100	37 lbs.
GRAHL-66D▼	5	66"	120, 120/208, 120/240		3420	39 lbs.
GRAHL-72D▼	6	72"	120, 120/208, 120/240		3810	42 lbs.
GRAHL-84D▲	7	84"	120, 120/208, 120/240		4520	47 lbs.
GRAHL-96D▲	8	96"	120, 120/208, 120/240		5280	56 lbs.
GRAHL-108D▲	9	108"	120, 120/208, 120/240		5540	64 lbs.
GRAHL-120D▲	10	120"	120, 120/208, 120/240		6200	72 lbs.
GRAHL-132D▲	11	132"	120/208, 120/240		6900	79 lbs.
GRAHL-144D▲	12	144"	120/208, 120/240		7620	86 lbs.

▼ When using an infinite control with 120V Model, additional switch(es) and tandem (end-to-end) elements required.
 ▲ 120V Models require additional switches and tandem (end-to-end) elements.
 ▶ Available with Remote Control Enclosure (RMB) or remote switch only.

All Aluminum Dual Strip Heaters with Lights Feature:
 Toggle Switch (max. 15 amps) Location: Chef's left side (unless otherwise specified).
 Leads: 3' conduit with leads – server's right.
 Dimensions: with 3" Spacer (standard): 15"D x 2½"H.
 with 6" Spacer: 18"D x 2½"H.

ONE YEAR ON-SITE PARTS AND LABOR WARRANTY, PLUS ONE ADDITIONAL YEAR PARTS-ONLY WARRANTY ON ALL GLO-RAY® METAL SHEATHED HEATING ELEMENTS.

OPTIONS AND ACCESSORIES – PAGE 8
RECOMMENDED MOUNTING HEIGHTS – PAGE 28





A series of GRAH-60Ds

OPTIONS (available at time of purchase only)

Designer Colors, Aluminum Models 18"-144" – Non-standard colors are non-returnable –

COLOR-15, -18	15" and 18" Housings for GRA, GRAH, GRAL and GRAHL Dual Models						
RED	Warm Red	GRAY	Gray Granite	NAVY	Navy Blue	COPPER	Antique Copper
BLACK	Black	WHITE	White Granite	GREEN	Hunter Green		

Gloss Finishes, Aluminum Models 18"-144" – Non-standard colors are non-returnable –

GLOSS-15, -18	15" and 18" Housings for GRA, GRAH, GRAL and GRAHL Dual Models				
RRED	Radiant Red	GGRAY	Glossy Gray	BBLACK	Bold Black
GGOLD	Gleaming Gold	BBLUE	Brilliant Blue		

IND. LGT	Indicator Light (Remote Control only)
-----------------	---------------------------------------

Leads (extended beyond standard 3' Conduit) (must specify lead length) –

LEADS5	1'-5' Extended Electrical Leads
LEADS10	6'-10' Extended Electrical Leads
LEADS15	11'-15' Extended Electrical Leads
LEADS20	16'-20' Extended Electrical Leads

9.375BP1	9 3/8" Sneeze Guard, one side
9.375BP2	9 3/8" Sneeze Guard, two sides

14BP1	14" Sneeze Guard, one side
14BP2	14" Sneeze Guard, two sides

HAL	Halogen Bulb in lieu of standard Display Light (60 Watt)
------------	--

LIGHTS-ADD'L	Extra Lamps – Installed (max. two per ft. less one – one per foot is standard)
---------------------	--

3 ANEAL REFL	Bright Annealed Reflector for Lights with 3" Spacer
---------------------	---

6 ANEAL REFL	Bright Annealed Reflector for Lights with 6" Spacer
---------------------	---

REM INF	Remote Infinite Switches (max. 12.2 Amps)
----------------	---

REM TOG	Remote Toggle Switches (max. 15 Amps)
----------------	---------------------------------------

RMB	Remote Control Enclosure (available in Designer Colors or Gloss Finishes – Non-standard colors are non-returnable) – (see page 29 and 30 for Models)
------------	--

ATL-D	Adjustable Tubular Stands 10"-14" (not available in Designer Colors)
--------------	--

NTL-10-D, 12-D	Non-Adjustable Tubular Stands (specify 10" or 12" clearance)
-----------------------	--

NTL-14-D, 16 -D	Non-Adjustable Tubular Stands (specify 14" or 16" clearance)
------------------------	--

NTL-PAINT-D	Designer Color or Gloss Finish for Non-Adjustable Tubular Stands – Non-standard colors are non-returnable –
--------------------	---

ACCESSORIES (available for purchase at any time)

ADJ ANGLE-D	Adjustable Angle Brackets (see page 29 for illustration)
--------------------	--

CHAIN 1	Chain Suspension (see page 29 for illustration)
----------------	---

COLORS AND FINISHES – PAGE 31

Glo-Ray® Max Watt Infrared Strip Heaters

Safely hold the temperature of your product without drying out or further cooking food with Hatco's Glo-Ray® Max Watt Infrared Strip Heaters. The end result is hot, fresh food that's ready-to-serve. The continuous aluminum housing and heavy-duty mountings ensure the durability and quality of Hatco products.

- Features 25% greater wattage output than Glo-Ray high watt by comparison with single units varying in watts from 450 to 4150 watts; and units with lights varying from 570 to 4870 watts
- Ensures maximum flavor, safety and holding time
- Sturdy extruded aluminum housings that do not sag, from 18" to 72" in 6" increments and 84" to 144" in 12" increments
- Reinforced wire guard provides operator safety without affecting heat distribution
- Heavy-duty insulation minimizes heat loss

- Shatter-resistant incandescent lights (standard on GRAML models) enhance product display while safeguarding food products from bulb breakage. An optional halogen bulb may be used in lieu of incandescents
- Available options include an electronic infinite control with relay in a remote control enclosure



GRAM-36



GRAML-36 with shatter-resistant incandescent lights and standard angle brackets

ALUMINUM MAX WATT INFRARED STRIP HEATERS

Model	Width	Voltage		Watts	Ship Weight [◇]
		Single Phase Only			
Max Watt					
GRAM-18	18"	120, 208, 240		450	6 lbs.
GRAM-24	24"	120, 208, 240		650	7 lbs.
GRAM-30	30"	120, 208, 240		825	8 lbs.
GRAM-36	36"	120, 208, 240		1000	9 lbs.
GRAM-42	42"	120, 208, 240		1175	10 lbs.
GRAM-48	48"	120, 208, 240		1300	11 lbs.
GRAM-54	54"	120, 208, 240		1500	13 lbs.
GRAM-60	60"	120, 208, 240		1700	14 lbs.
GRAM-66 [▲]	66"	120, 208, 240		1875	16 lbs.
GRAM-72 [▲]	72"	120, 208, 240		2075	17 lbs.
GRAM-84 [▲]	84"	120, 208, 240		2400	19 lbs.
GRAM-96 [▲]	96"	120, 208, 240		2675	21 lbs.
GRAM-108 [▶]	108"	208, 240		3000	23 lbs.
GRAM-120 [▶]	120"	208, 240		3400	26 lbs.
GRAM-132 [▶]	132"	208, 240		3750	30 lbs.
GRAM-144 [▶]	144"	208, 240		4150	33 lbs.

- ▶ Available with Remote Control Enclosure only (RMB).
- ◇ Add 2-8 lbs. depending on RMB.
- ▼ Electronic infinite control with 120V Model requires additional switch(es) and tandem (end-to-end) elements, cord not available.
- ▲ 120V Models require additional switches and tandem (end-to-end) elements.
- ▶ 120V Models available with RMB (GRAM-66, -72, -84, -96 only).

All Max Watt Infrared Strip Heaters Feature:

Includes: Angle brackets and attached or remote control enclosure.
Leads: 3' conduit with leads – server's right.
Dimensions: 18"-144"W x 6"D x 2½"H.

ALUMINUM MAX WATT INFRARED STRIP HEATERS WITH LIGHTS


Model	Bulbs	Width	Voltage		Watts	Ship Weight [◇]
			Single Phase Only			
Max Watt						
GRAML-18	2	18"	120, 120/208, 120/240		570	9 lbs.
GRAML-24	2	24"	120, 120/208, 120/240		770	10 lbs.
GRAML-30	2	30"	120, 120/208, 120/240		945	11 lbs.
GRAML-36	3	36"	120, 120/208, 120/240		1180	13 lbs.
GRAML-42	3	42"	120, 120/208, 120/240		1355	15 lbs.
GRAML-48	4	48"	120, 120/208, 120/240		1540	17 lbs.
GRAML-54	4	54"	120, 120/208, 120/240		1740	19 lbs.
GRAML-60 [▶]	5	60"	120, 120/208, 120/240		2000	21 lbs.
GRAML-66 [▲]	5	66"	120, 120/208, 120/240		2175	22 lbs.
GRAML-72 [▲]	6	72"	120, 120/208, 120/240		2435	24 lbs.
GRAML-84 [▲]	7	84"	120, 120/208, 120/240		2820	28 lbs.
GRAML-96 [▲]	8	96"	120, 120/208, 120/240		3155	32 lbs.
GRAML-108 [▶]	9	108"	120/208, 120/240		3540	36 lbs.
GRAML-120 [▶]	10	120"	120/208, 120/240		4000	40 lbs.
GRAML-132 [▶]	11	132"	120/208, 120/240		4410	44 lbs.
GRAML-144 [▶]	12	144"	120/208, 120/240		4870	48 lbs.

- ▶ Available with Remote Control Enclosure only (RMB).
- ◇ Add 2-8 lbs. depending on RMB.
- ▼ Electronic infinite control with 120V Model requires additional switch(es) and tandem (end-to-end) elements, cord not available.
- ▲ 120V Models require additional switch(es) and tandem (end-to-end) elements.
- ▶ 120V Models available with RMB (GRAML-60, -66, -72, -84 only).

All Max Watt Infrared Strip Heaters with Lights Feature:

Includes: Angle brackets and attached or remote control enclosure.
Leads: 3' conduit with leads – server's right.
Dimensions: 18"-144"W x 9"D x 2½"H.

OPTIONS AND ACCESSORIES – PAGE 10 RECOMMENDED MOUNTING HEIGHTS – PAGE 28



ONE YEAR ON-SITE PARTS AND LABOR WARRANTY, PLUS ONE ADDITIONAL YEAR PARTS-ONLY WARRANTY ON ALL GLO-RAY® METAL SHEATHED HEATING ELEMENTS.



GRAML-48 with standard angle brackets

OPTIONS (available at time of purchase only)

Designer Colors, Aluminum Models 18"-144" – Non-standard colors are non-returnable –

COLOR-6	6" Housing for GRAM Models (select color)							
COLOR-9	9" Housing for GRAML Models (select color)							
RMB-COLOR	Remote Control Housing in Designer Colors (select color)							
	RED	Warm Red	GRAY	Gray Granite	NAVY	Navy Blue	COPPER	Antique Copper
	BLACK	Black	WHITE	White Granite	GREEN	Hunter Green		

Gloss Finishes, Aluminum Models 18"-144" – Non-standard colors are non-returnable –

GLOSS-6	6" Housing for GRAM Models (select finish)							
GLOSS-9	9" Housing for GRAML Models (select finish)							
RMB-GLOSS	Remote Control Housing in Gloss Finishes (select finish)							
	RRED	Radiant Red	GGRAY	Glossy Gray	BBLACK	Bold Black		
	GGOLD	Gleaming Gold	BBLUE	Brilliant Blue				

Leads (extended beyond standard 3' Conduit) (must specify lead length) –

HTLEADS5	1'-5' Extended Electrical Leads
HTLEADS10	6'-10' Extended Electrical Leads
HTLEADS15	11'-15' Extended Electrical Leads
HTLEADS20	16'-20' Extended Electrical Leads
3 ANEAL REFL	Bright Annealed Reflector for Lights with 3" Spacer
RMB-GRAM-INF	Remote Control Enclosure with Toggle Control Switch, Electronic Infinite Control, Relay and Indicator Light in lieu of standard Remote Control Enclosure
NTL-14, -16	Non-Adjustable Tubular Stands (specify 14" or 16" clearance)
NTL-18, -20	Non-Adjustable Tubular Stands (specify 18" or 20" clearance)
NTL-22, -24	Non-Adjustable Tubular Stands (specify 22" or 24" clearance)
NTL-PAINT	Designer Color or Gloss Finish for Non-Adjustable Tubular Stands – Non-standard colors are non-returnable –
CAP	Attached 6' Cord and Plug Set (120V only) on Models up to 48" requires standard Chain Mount Kit (two S Hooks with two 6" Lengths of Chain)
CHAIN-HOOK	Two S Hooks with two 6" Lengths of Chain
HAL	Halogen Bulb in lieu of Incandescent Display Light (60 Watt)

ACCESSORIES (available for purchase at any time)

CHAIN 1	Chain Suspension (see page 29 for illustration)
----------------	---

COLORS AND FINISHES – PAGE 31

Glo-Ray® Max Watt Dual Infrared Strip Heaters

Create a deeper holding area with Glo-Ray® Max Watt Dual Aluminum Infrared Strip Heaters mounted side-by-side, keeping hot food at optimum serving temperatures. The pre-focused heat pattern directs heat from a metal-sheathed element, bathing the entire holding surface. The continuous aluminum housing and heavy-duty mountings ensure the durability and quality of Hatco products.

- Features 25% greater wattage output than Glo-Ray high watt by comparison with dual units varying in wattage from 900 to 8300 watts; and units with lights varying from 1020 to 9020 watts
- Sturdy extruded aluminum housings that do not sag, from 18" to 72" in 6" increments and 84" to 144" in 12" increments
- Metal sheathed heating elements guaranteed against burnout and breakage for two years
- Reinforced wire guard provides operator safety without affecting heat distribution
- 3" or 6" spacer available
- Heavy-duty insulation minimizes heat loss
- Shatter-resistant incandescent lights (standard on GRAML models) enhance product display while safeguarding food products from bulb breakage. An optional halogen bulb may be used in lieu of incandescents



GRAM-36D
with 3" spacer

ALUMINUM MAX WATT DUAL STRIP HEATERS

Model	Width	Voltage		Watts	Ship Weight*
		Single Phase Only			
Max Watt					
GRAM-18D	18"	120, 208, 240		900	14 lbs.
GRAM-24D	24"	120, 208, 240		1300	16 lbs.
GRAM-30D	30"	120, 208, 240		1650	18 lbs.
GRAM-36D	36"	120, 208, 240		2000	21 lbs.
GRAM-42D	42"	120, 208, 240		2350	24 lbs.
GRAM-48D	48"	120, 208, 240		2600	27 lbs.
GRAM-54D	54"	120, 208, 240		3000	30 lbs.
GRAM-60D	60"	120, 208, 240		3400	34 lbs.
GRAM-66D [▲]	66"	120, 208, 240		3750	37 lbs.
GRAM-72D [▲]	72"	120, 208, 240		4150	41 lbs.
GRAM-84D [▲]	84"	120, 208, 240		4800	44 lbs.
GRAM-96D ^{▼▲}	96"	120, 208, 240		5350	52 lbs.
GRAM-108D [▶]	108"	208, 240		6000	59 lbs.
GRAM-120D [▶]	120"	208, 240		6800	66 lbs.
GRAM-132D [▶]	132"	208, 240		7500	73 lbs.
GRAM-144D [▶]	144"	208, 240		8300	80 lbs.

- ▶ Available with Remote Control Enclosure (RMB) only.
- ◊ Add 2-8 lbs. depending on RMB.
- ▲ 120V Models require additional switches and tandem (end-to-end) elements.
- 120V Models available with RMB (GRAM-66D, -72D, -84D, -96D only).
- ▼ When using an infinite control with 120V Model, additional switch(es) and tandem (end-to-end) elements are required.

All Infrared Max Watt Dual Strip Heaters Feature:

Includes: Angle brackets and attached or remote control enclosure.

Leads: 3' conduit with leads – server's right.

Dimensions: with 3" Spacer (standard): 18"-144"W x 15"D x 2½"H.
with 6" Spacer: 18"-144"W x 18"D x 2½"H.

OPTIONS – PAGE 13


RECOMMENDED MOUNTING HEIGHTS – PAGE 28



ONE YEAR ON-SITE PARTS AND LABOR WARRANTY, PLUS ONE ADDITIONAL YEAR PARTS-ONLY WARRANTY ON ALL GLO-RAY® METAL SHEATHED HEATING ELEMENTS.



Strip Heater Solutions

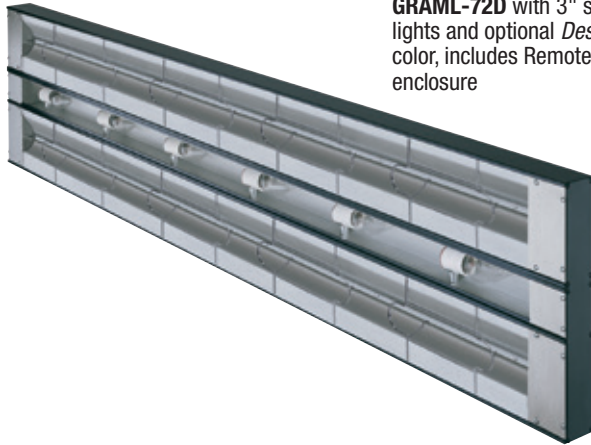

GRAML-72D with 3" spacer and lights and optional *Designer* Black color, includes Remote Control enclosure

ALUMINUM MAX WATT DUAL STRIP HEATERS WITH LIGHTS

Model	Bulbs	Width	Voltage	Watts	Ship Weight [◇]
			Single Phase Only		
Max Watt					
GRAML-18D	2	18"	120, 120/208, 120/240	1020	14 lbs.
GRAML-24D	2	24"	120, 120/208, 120/240	1420	16 lbs.
GRAML-30D	2	30"	120, 120/208, 120/240	1770	19 lbs.
GRAML-36D	3	36"	120, 120/208, 120/240	2180	22 lbs.
GRAML-42D	3	42"	120, 120/208, 120/240	2530	25 lbs.
GRAML-48D	4	48"	120, 120/208, 120/240	2840	29 lbs.
GRAML-54D	4	54"	120/208, 120/240	3240	34 lbs.
GRAML-60D	5	60"	120/208, 120/240	3700	37 lbs.
GRAML-66D [▲]	5	66"	120/208, 120/240	4050	40 lbs.
GRAML-72D [▲]	6	72"	120/208, 120/240	4510	42 lbs.
GRAML-84D [▲]	7	84"	120/208, 120/240	5220	47 lbs.
GRAML-96D ^{▼▲}	8	96"	120/208, 120/240	5830	56 lbs.
GRAML-108D [▶]	9	108"	120/208, 120/240	6540	64 lbs.
GRAML-120D [▶]	10	120"	120/208, 120/240	7400	72 lbs.
GRAML-132D [▶]	11	132"	120/208, 120/240	8160	79 lbs.
GRAML-144D [▶]	12	144"	120/208, 120/240	9020	86 lbs.

▶ Available with Remote Control Enclosure (RMB) only (120/208 and 120/240V Models available with RMB-GRAM-INF only).

◇ Add 2-8 lbs. depending on RMB.

▲ 120V Models require additional switches and tandem (end-to-end) elements.

▼ 120V Models available with RMB (GRAML-66D, -72D, -84D only).

▼ When using an infinite control with 120V Model, additional switch(es) and tandem (end-to-end) elements are required.

Note: Other control options available, consult factory.

All Infrared Max Watt Dual Strip Heaters with Lights Feature:

Includes: Angle brackets and attached or remote control enclosure.

Leads: 3' conduit with leads – server's right.

Dimensions: with 3" Spacer (standard): 15"D x 2½"H.

with 6" Spacer: 18"D x 2½"H.

OPTIONS – PAGE 13

RECOMMENDED MOUNTING HEIGHTS – PAGE 28



ONE YEAR ON-SITE PARTS AND LABOR WARRANTY, PLUS ONE ADDITIONAL YEAR PARTS-ONLY WARRANTY ON ALL GLO-RAY[®] METAL SHEATHED HEATING ELEMENTS.



GRAML-60D with optional non-adjustable tubular stands

OPTIONS (available at time of purchase only)

Designer Colors, Aluminum Models 18"-144" – Non-standard colors are non-returnable –

COLOR-15, -18	15" and 18" Housings for GRAM and GRAML Dual Models						
RMB-COLOR	Remote Control Housing in Designer Colors						
RED	Warm Red	GRAY	Gray Granite	NAVY	Navy Blue	COPPER	Antique Copper
BLACK	Black	WHITE	White Granite	GREEN	Hunter Green		

Gloss Finishes, Aluminum Models 18"-144" – Non-standard colors are non-returnable –

GLOSS-15, -18	15" and 18" Housings for GRAM and GRAML Dual Models					
RMB-GLOSS	Remote Control Housing in Gloss Finishes					
RRED	Radiant Red	GGRAY	Glossy Gray	BBLACK	Bold Black	
GGOLD	Gleaming Gold	BBLUE	Brilliant Blue			

Leads (extended beyond Standard 3' Conduit) (must specify lead length) –

HTLEADS5	1'-5' Extended Electrical Leads
HTLEADS10	6'-10' Extended Electrical Leads
HTLEADS15	11'-15' Extended Electrical Leads
HTLEADS20	16'-20' Extended Electrical Leads
RMB-GRAM-INF	Remote Control Enclosure with Toggle Control Switch, Electronic Infinite Control, Relay and Indicator Light in lieu of standard Remote Control Enclosure
3 ANEAL REFL	Bright Annealed Reflector for Lights with 3" Spacer
6 ANEAL REFL	Bright Annealed Reflector for Lights with 6" Spacer
NTL-18-D, -20 -D	Non-Adjustable Tubular Stands (specify 18" or 20" clearance)
NTL-22-D, -24-D	Non-Adjustable Tubular Stands (specify 22" or 24" clearance)
NTL-PAINT-D	Designer Color or Gloss Finish for Non-Adjustable Tubular Stands – Non-standard colors are non-returnable –
HAL	Halogen Bulb in lieu of Incandescent Display Light (60 Watt)

COLORS AND FINISHES – PAGE 31




Strip Heater Solutions

Glo-Ray® Narrow Halogen Strip Heaters

Hatco Glo-Ray® Narrow Halogen Strip Heaters are great for use in tight spaces and keep the focus on food items being displayed. Even the most delicate dishes hold that just-prepared look.

- Sleek, slim design with just 2 1/8" height and 4" depth
- Halogen heat source is controlled by a dimmer switch, allowing maximum flexibility
- Xenon bulbs, controlled by a toggle switch, light food product when no extra heat is desired
- Available in widths from 18" to 72" for GRN4 models and 24" to 72" for GRN4L models

GRN4L-36 in *Designer Black* (standard) alternates Halogen heat with Xenon lights - Angle brackets standard (not shown)

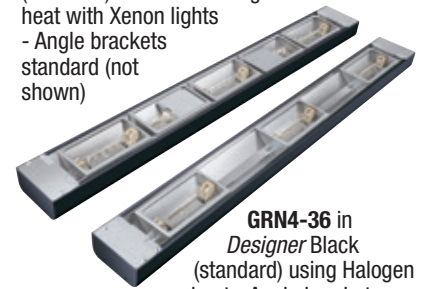

GRN4-36 in *Designer Black* (standard) using Halogen heat - Angle brackets standard (not shown)

Remote Control Enclosures



For GRN4 Models:
One dimmer and one toggle switch



For GRN4L Models:
One dimmer and two toggle switches

NARROW HALOGEN STRIP HEATERS

Model	No. of Elements	Width	Watts	Ship Weight [□]
GRN4-18	2	18"	400	8 lbs.
GRN4-24	2	24"	400	8 lbs.
GRN4-30	2	30"	400	10 lbs.
GRN4-36	3	36"	600	11 lbs.
GRN4-42	3	42"	600	12 lbs.
GRN4-48	3	48"	600	12 lbs.
GRN4-54	4	54"	800	15 lbs.
GRN4-60	4	60"	800	15 lbs.
GRN4-66	5	66"	1000	17 lbs.
GRN4-72	5	72"	1000	18 lbs.

[□] Includes Remote Control Enclosures with dimmer and toggle(s).

All Narrow Halogen Strip Heaters Feature:

Voltage: 120, single phase only.

Leads: 6" leads.

Models Shipped with: 3' conduit with leads, angle brackets and remote control enclosure with switch(es).

Dimensions: 18"-72"W x 4"D x 2 1/8"H.

NARROW HALOGEN STRIP HEATERS WITH XENON LIGHTS

Model	No. of Elements	No. of Bulbs	Width	Watts	Ship Weight [□]
GRN4L-24	2	1	24"	450	9 lbs.
GRN4L-30	2	1	30"	450	10 lbs.
GRN4L-36	3	2	36"	700	13 lbs.
GRN4L-42	3	2	42"	700	14 lbs.
GRN4L-48	3	2	48"	700	14 lbs.
GRN4L-54	4	3	54"	950	17 lbs.
GRN4L-60	4	3	60"	950	18 lbs.
GRN4L-66	5	4	66"	1200	21 lbs.
GRN4L-72	5	4	72"	1200	21 lbs.

[□] Includes Remote Control Enclosures with dimmer and toggle(s).

All Narrow Halogen Strip Heaters with Lights Feature:

Voltage: 120, single phase only.


Leads: 6" leads.

Models Shipped with: 3' conduit with leads, angle brackets and remote control enclosure with switch(es).

Dimensions: 24"-72"W x 4"D x 2 1/8"H.

OPTIONS – PAGE 15

RECOMMENDED MOUNTING HEIGHTS – PAGE 28

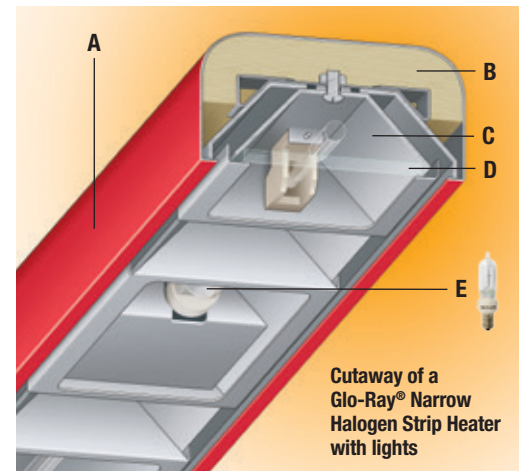

Cutaway of a Glo-Ray® Narrow Halogen Strip Heater with lights

- A** Powdercoated steel continuous housing in a variety of colors
- B** Heavy-duty insulation minimizes heat loss
- C** Aluminized reflector retains full heat intensity and directs more heat towards the edges of the holding surface
- D** Ceramic glass shields provide a safety barrier for the xenon and halogen bulbs
- E** Xenon bulbs light food when no extra heat is needed





GRN4L-54 with optional Non-Adjustable Tubular Stands (NTL) above a GR2S-42

OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable – Black Standard –

RED	Warm Red	GRAY	Gray Granite	NAVY	Navy Blue	COPPER	Antique Copper
BLACK	Black	WHITE	White Granite	GREEN	Hunter Green		

Gloss Finishes – Non-standard colors are non-returnable –

SWHITE	Smooth White	GGOLD	Gleaming Gold	GGRAY	Glossy Gray	BBLACK	Bold Black
---------------	--------------	--------------	---------------	--------------	-------------	---------------	------------

Stainless Steel – Non-standard colors are non-returnable –

SS	Stainless Steel
-----------	-----------------

Gloss Finishes – Non-standard colors are non-returnable –

RRED*	Radiant Red	BBLUE*	Brilliant Blue
--------------	-------------	---------------	----------------

Plated Finishes (three week lead time for Plated Finishes) – Non-standard colors are non-returnable –

BBRASS1*	Bright Brass	BCOPPER1*	Bright Copper	ANICKEL1*	Antique Nickel
BNICKEL1*	Bright Nickel	ABRASS1*	Antique Brass	ABRONZE1*	Antique Bronze

Leads (must specify lead length) –

LEADS5	1'-5' Extended Electrical Leads
LEADS10	6'-10' Extended Electrical Leads
LEADS15	11'-15' Extended Electrical Leads
LEADS20	16'-20' Extended Electrical Leads

NTL-10, 12 Non-Adjustable Tubular Stands (specify 10" or 12" clearance)

NTL-14, 16 Non-Adjustable Tubular Stands (specify 14" or 16" clearance)

NTL-PAINT Designer Color or Gloss Finish for Non-Adjustable Tubular Stands – Non-standard colors are non-returnable –

Control Box Bezel – Designer Colors – Non-standard colors are non-returnable –

RED	Warm Red	GRAY	Gray Granite	NAVY	Navy Blue	COPPER	Antique Copper
BLACK	Black	WHITE	White Granite	GREEN	Hunter Green		

* Special process required and extended lead times – Non-standard colors are non-returnable –

COLORS AND FINISHES – PAGE 31



Glo-Ray® Narrow Infrared Strip Heaters

Hatco Glo-Ray® Narrow Infrared Strip Heaters keep all hot foods at optimum serving temperatures longer, while the slim design fits ideally in buffet areas. Even the most delicate dishes hold that “just-prepared” look. The entire holding surface is heated evenly with no “cold” spots.

- Has a slim design that’s only 2" in height and 4" deep
- Available in widths from 18"-72"
- Pre-focused heat pattern maintains serving temperatures longer without continuing to cook the food
- Optional remote control enclosure available in *Designer* colors

Toggle Switch: Max. 15 amps
Infinite Switch: Max. 12.2 amps



GRN-24 with standard angle brackets

NARROW STRIP HEATERS

Model	Width	Voltage Single Phase Only	Watts	Ship Weight
Standard Watt				
GRN-18	18"	120, 208, 240	250	6 lbs.
GRN-24	24"	120, 208, 240	350	7 lbs.
GRN-30	30"	120, 208, 240	450	8 lbs.
GRN-36	36"	120, 208, 240	575	9 lbs.
GRN-42	42"	120, 208, 240	675	10 lbs.
GRN-48	48"	120, 208, 240	800	11 lbs.
GRN-54	54"	120, 208, 240	925	13 lbs.
GRN-60	60"	120, 208, 240	1050	14 lbs.
GRN-66	66"	120, 208, 240	1160	16 lbs.
GRN-72	72"	120, 208, 240	1275	17 lbs.
High Watt				
GRNH-18	18"	120, 208, 240	350	6 lbs.
GRNH-24	24"	120, 208, 240	500	7 lbs.
GRNH-30	30"	120, 208, 240	660	8 lbs.
GRNH-36	36"	120, 208, 240	800	9 lbs.
GRNH-42	42"	120, 208, 240	950	10 lbs.
GRNH-48	48"	120, 208, 240	1100	11 lbs.
GRNH-54	54"	120, 208, 240	1250	13 lbs.
GRNH-60	60"	120, 208, 240	1400	14 lbs.
GRNH-66*	66"	120, 208, 240	1560	16 lbs.
GRNH-72*	72"	120, 208, 240	1725	17 lbs.

*120V Models not available for use with Remote Infinite Switch.


All Narrow Strip Heaters Feature:

Toggle Switch (max. 15 amps) with Indicator Light Location: Chef’s left side (unless otherwise specified).
Designer Colored Angle Brackets: To match unit color and provide 1½" clearance between Strip Heater and overshelf. Non-standard colors are non-returnable.


Leads: 6" leads – server’s right. **Dimensions:** 18"-72"W x 4"D x 2"H.

RECOMMENDED MOUNTING HEIGHTS – PAGE 28

ONE YEAR ON-SITE PARTS AND LABOR WARRANTY, PLUS ONE ADDITIONAL YEAR PARTS-ONLY WARRANTY ON ALL GLO-RAY® METAL SHEATHED HEATING ELEMENTS.

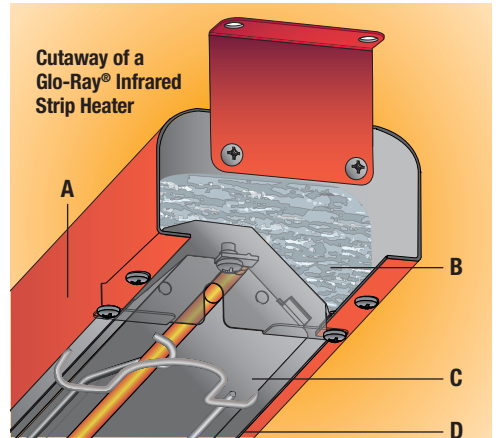

- A** Sturdy housing in stainless steel or one of seven *Designer* colors
- B** Heavy-duty insulation minimizes heat loss
- C** Alumined reflector retains full heat intensity and directs more heat towards the edges of the holding surface
- D** Reinforced wire guard supports the heating element and provides operator safety without affecting heat distribution

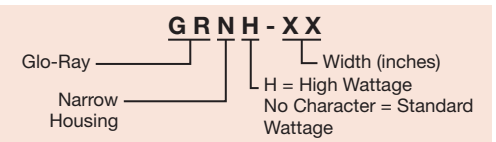

OPTIONS (available at time of purchase only)

Designer Colors, Models 18"-72" – Non-standard colors are non-returnable – Black Standard –

RED Warm Red	GRAY Gray Granite	NAVY Navy Blue	COPPER Antique Copper
BLACK Black	WHITE White Granite	GREEN Hunter Green	

Stainless Steel – Non-standard colors are non-returnable –

SS Stainless Steel

Leads (must specify lead length) –

LEADS5	1'-5' Extended Electrical Leads
LEADS10	6'-10' Extended Electrical Leads
LEADS15	11'-15' Extended Electrical Leads
LEADS20	16'-20' Extended Electrical Leads

RMB Remote Control Enclosure (available in *Designer* Colors or Gloss Finishes – Non-standard colors are non-returnable) – (see page 29 and 30 for Models)

TABS Stainless Steel Hanger Tabs in lieu of Angle Brackets

CAP Attached 6' Cord and Plug Set (120V only) on Models up to 72" with standard Chain Mount Kit (two S Hooks with two 6" Lengths of Chain) and Hanger Tabs (max. 1800 Watt)

CHAIN-HOOK Two S Hooks with two 6" Lengths of Chain

NTL-10, 12 Non-Adjustable Tubular Stands (specify 10" or 12" clearance and power location)

NTL-14, 16 Non-Adjustable Tubular Stands (specify 14" or 16" clearance and power location)

NTL-PAINT *Designer* Color for Non-Adjustable Tubular Stands – Non-standard colors are non-returnable –

COLORS AND FINISHES – PAGE 31

Glo-Ray® High Watt Infra-Black® Strip Heaters


For foodwarming at a close range to food product, the Glo-Ray® Infra-Black® heat technology is ideal, emitting a solid panel of uniform heat. Sturdy continuous single or dual extruded aluminum housings assure quality, durability and a variety of widths, depths, mounting arrangements and colors will fit your operation.

Toggle Switch: Max. 15 amps
Infinite Switch: Max. 12.2 amps

- Provides ideal amount of heat for limited space operations, mounted 4" to 10" above target surface for singles and 8" to 14" for duals
- Metal sheathed heating elements guaranteed against burnout and breakage for two years
- Infra-Black emitter provides even heat distribution – eliminating hot spots
- Sturdy aluminum housings that do not sag, from 18" to 72" in 6" increments
- Heavy-duty insulation keeps the exterior housing cool
- Optional wire guard available to protect user from incidental contact with heated surface
- Optional 3" or 6" spacer available on dual models with or without lights (see next page)



GRAIH-36 with optional wire guard (requires Remote Control Enclosure)

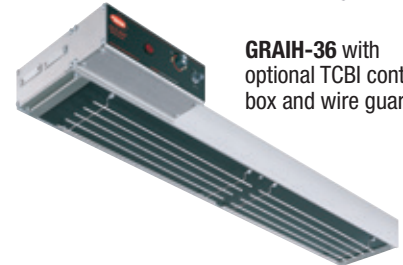

GRAIH-36 with optional TCBI control box and wire guard

ALUMINUM STRIP HEATERS – HIGH WATT INFRA-BLACK

Model	Width	Voltage		Watts	Ship Weight*
		Single Phase Only			
GRAIH-18	18"	120, 208, 240		350	6 lbs.
GRAIH-24	24"	120, 208, 240		500	11 lbs.
GRAIH-30	30"	120, 208, 240		660	13 lbs.
GRAIH-36	36"	120, 208, 240		800	15 lbs.
GRAIH-42	42"	120, 208, 240		950	17 lbs.
GRAIH-48	48"	120, 208, 240		1100	21 lbs.
GRAIH-54	54"	120, 208, 240		1250	24 lbs.
GRAIH-60	60"	120, 208, 240		1400	27 lbs.
GRAIH-66*	66"	120, 208, 240		1560	30 lbs.
GRAIH-72*	72"	120, 208, 240		1725	33 lbs.

ALUMINUM STRIP HEATERS – HIGH WATT INFRA-BLACK WITH LIGHTS

Model	No. of Bulbs	Width	Voltage		Watts	Ship Weight*
			Single Phase Only			
GRAIHL-18	2	18"	120, 120/208, 120/240		470	12 lbs.
GRAIHL-24	2	24"	120, 120/208, 120/240		620	15 lbs.
GRAIHL-30	2	30"	120, 120/208, 120/240		780	17 lbs.
GRAIHL-36	3	36"	120, 120/208, 120/240		980	20 lbs.
GRAIHL-42	3	42"	120, 120/208, 120/240		1130	23 lbs.
GRAIHL-48	4	48"	120, 120/208, 120/240		1340	26 lbs.
GRAIHL-54	4	54"	120, 120/208, 120/240		1490	29 lbs.
GRAIHL-60	5	60"	120, 120/208, 120/240		1700	33 lbs.
GRAIHL-66*	5	66"	120, 120/208, 120/240		1860	34 lbs.
GRAIHL-72* [^]	6	72"	120, 120/208, 120/240		2085	36 lbs.

- Does not include Remote Control Enclosure (RMB).
- ♦ Infinite not available in 120V.
- [^] 120V Models available with remote control only.

All Infra-Black Strip Heaters Feature:

Leads: 3' conduit with leads – server's right. 6" leads when supplied with TCBI – exit side of control box.

Dimensions: GRAIH: 18"-72"W x 6"D x 2½"H.


GRAIHL: 18"-72"W x 9"D x 2½"H.

TCBI Control Enclosure Dimensions (not including switches): 8"W x 3"D x 2½"H.

Control Enclosure Location: Chef's left side – light side (unless otherwise specified).


OPTIONS AND ACCESSORIES – PAGE 19

RECOMMENDED MOUNTING HEIGHTS – PAGE 28

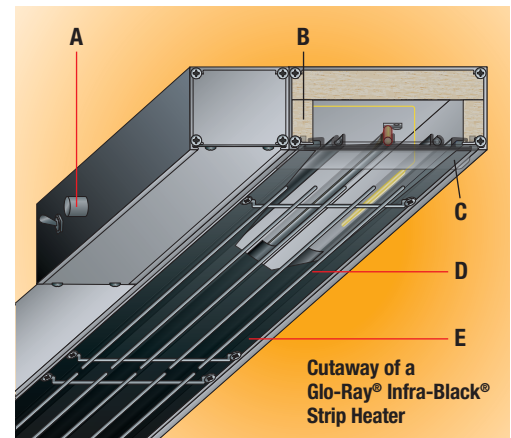

Cutaway of a Glo-Ray® Infra-Black® Strip Heater


- A** Thermostatically-controlled to regulate heat and provide consistent temperature. (Optional remote infinite control available)
- B** Heavy-duty insulation minimizes heat loss
- C** Provides ideal amount of heat for limited space operations, effectively holding product
- D** Optional wire guard available to protect user from incidental contact with the heated surface
- E** Infra-Black emitter provides even heat distribution, eliminating hot spots for close applications

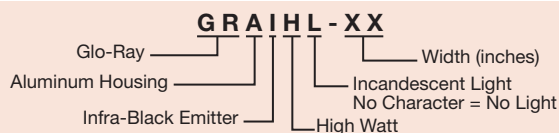


ONE YEAR ON-SITE PARTS AND LABOR WARRANTY, PLUS ONE ADDITIONAL YEAR PARTS-ONLY WARRANTY ON ALL GLO-RAY® METAL SHEATHED HEATING ELEMENTS.



**Glo-Ray® High Watt
Dual Infra-Black® Strip Heaters**

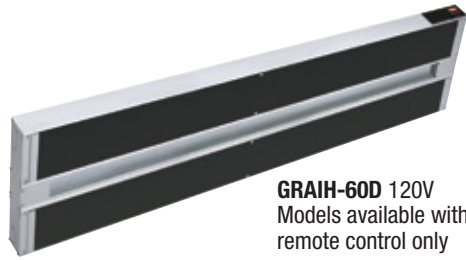

GRAIH-60D 120V
Models available with remote control only



GRAIHL-24D In optional *Designer* Navy Blue

Toggle Switch: Max. 15 amps
Infinite Switch: Max. 12.2 amps

DUAL ALUMINUM STRIP HEATERS – HIGH WATT INFRA-BLACK

Model	Width	Voltage		
		Single Phase Only	Watts	Ship Weight*
GRAIH-18D	18"	120, 208, 240	700	13 lbs.
GRAIH-24D	24"	120, 208, 240	1000	19 lbs.
GRAIH-30D	30"	120, 208, 240	1320	21 lbs.
GRAIH-36D	36"	120, 208, 240	1600	24 lbs.
GRAIH-42D ^Δ	42"	120, 208, 240	1900	27 lbs.
GRAIH-48D ^Δ	48"	120, 208, 240	2200	32 lbs.
GRAIH-54D ^Δ	54"	120, 208, 240	2500	35 lbs.
GRAIH-60D ^Δ	60"	120, 208, 240	2800	39 lbs.
GRAIH-66D ^{Δ*}	66"	120, 208, 240	3120	42 lbs.
GRAIH-72D ^{Δ*}	72"	120, 240	3450	46 lbs.

DUAL ALUMINUM STRIP HEATERS – HIGH WATT INFRA-BLACK WITH LIGHTS

Model	No. of Bulbs	Width	Voltage		
			Single Phase Only	Watts	Ship Weight*
GRAIHL-18D	2	18"	120, 120/208, 120/240	820	18 lbs.
GRAIHL-24D	2	24"	120, 120/208, 120/240	1120	21 lbs.
GRAIHL-30D	2	30"	120, 120/208, 120/240	1440	23 lbs.
GRAIHL-36D	3	36"	120, 120/208, 120/240	1780	27 lbs.
GRAIHL-42D ^Δ	3	42"	120, 120/208, 120/240	2080	30 lbs.
GRAIHL-48D ^Δ	4	48"	120, 120/208, 120/240	2440	35 lbs.
GRAIHL-54D ^Δ	4	54"	120, 120/208, 120/240	2740	38 lbs.
GRAIHL-60D ^Δ	5	60"	120, 120/208, 120/240	3100	42 lbs.
GRAIHL-66D ^{Δ*}	5	66"	120, 120/240	3420	44 lbs.

- Does not include Remote Control Enclosure (RMB).
- Δ 120V Models available with remote control only.
- * Infinite not available in 120V.

All Dual Infra-Black Strip Heaters Feature:

Leads: 3' conduit with leads – server's right. 6" leads when supplied with TCBI – exit side of control box.

Dimensions: GRAIH-xxD with 3" Spacer: 18"-72"W x 15"D x 2½"H.

GRAIHL-xxD with 3" Spacer: 18"-66"W x 15"D x 2½"H.


GRAIH-xxD with 6" Spacer: 18"-72"W x 18"D x 2½"H.

GRAIHL-xxD with 6" Spacer: 18"-66"W x 18"D x 2½"H.

TCBI Control Enclosure Dimensions (not including switches): 8"W x 3"D x 2½"H.

Control Enclosure Location: Chef's left side – light side (unless otherwise specified).

**OPTIONS AND ACCESSORIES – PAGE 19
RECOMMENDED MOUNTING HEIGHTS – PAGE 28**

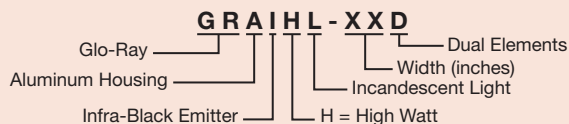

ONE YEAR ON-SITE PARTS AND LABOR WARRANTY, PLUS ONE ADDITIONAL YEAR PARTS-ONLY WARRANTY ON ALL GLO-RAY® METAL SHEATHED HEATING ELEMENTS.



GRAIH-72 with optional wire guard (requires Remote Control Enclosure)

OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable –

COLOR-6, -9	6" Housing for GRAIH Models and 9" Housing for GRAIHL Models (select color)						
COLOR-15, -18	15" and 18" Housings for GRAIH and GRAIHL Dual Models (select color)						
RED	Warm Red	GRAY	Gray Granite	NAVY	Navy Blue	COPPER	Antique Copper
BLACK	Black	WHITE	White Granite	GREEN	Hunter Green		

Gloss Finishes – Non-standard colors are non-returnable –

GLOSS-6, -9	6" Housing for GRAIH Models and 9" Housing for GRAIHL Models (select finish)						
GLOSS-15, -18	15" and 18" Housings for GRAIH and GRAIHL Dual Models (select finish)						
RRED	Radiant Red	GGRAY	Glossy Gray	BBLACK	Bold Black		
GGOLD	Gleaming Gold	BBLUE	Brilliant Blue				

AIH18WG -AIH72WG	Element Wire Guard (Dual Models require two sets)
HAL	Halogen Bulb in lieu of standard Display Light (60 Watt)
RMB	Remote Control Enclosure (available in <i>Designer Colors</i> or <i>Gloss Finishes</i> – Non-standard colors are non-returnable) – (see page 29 and 30 for Models)
TCBI	Thermostatic Control Box with Indicator Lights
CHAIN-HOOK	Two S Hooks with two 6" Lengths of Chain
AIH4NTL	4" Non-Adjustable Tubular Stands
AIH6NTL	6" Non-Adjustable Tubular Stands
AIH8NTL	8" Non-Adjustable Tubular Stands (Dual Models require two pair)
AIH10NTL	10" Non-Adjustable Tubular Stands (Dual Models require two pair)
AIH12NTL-D	12" Non-Adjustable Tubular Stands
AIH14NTL-D	14" Non-Adjustable Tubular Stands
NTL-PAINT	<i>Designer Color</i> or <i>Gloss Finish</i> for Non-Adjustable Tubular Stands – Non-standard colors are non-returnable –
NTL-PAINT-D	<i>Designer Color</i> or <i>Gloss Finish</i> for Non-Adjustable Tubular Stands – Non-standard colors are non-returnable –

ACCESSORIES (available for purchase at any time)

ADJ ANGLE	Adjustable Angle Brackets (Dual Models require two pair) (see page 29 for illustration)
ADJ ANGLE-D	Adjustable Angle Brackets (see page 29 for illustration)
CHAIN 1	Chain Suspension (see page 29 for illustration)

COLORS AND FINISHES – PAGE 31



Strip Heater Solutions

Glo-Ray® Designer Infrared Strip Heaters


Hatco Glo-Ray® Designer Infrared Strip Heaters safely keep all hot foods at optimum serving temperatures longer. This modern design is ideal for front-of-the-house use. Units are offered in continuous housings, up to 7', are available in Designer colors to match most décors and include 14" Designer non-adjustable stands.

Toggle Switch: Max. 15 amps
Infinite Switch: Max. 12.2 amps

- Pre-focused heat maintains safe serving temperatures longer without continuing to cook the food
- Available in widths from 21½" to 87½"
- Available in a variety of models, configurations, colors and accessories to provide unlimited flexibility
- Black corner caps and inset panels standard
- Metal sheathed heating elements guaranteed against burnout and breakage for two years
- Optional coated shatter-resistant incandescent or halogen lights enhance product displays while safeguarding food from bulb breakage
- Optional sneeze guards



GR2AH-36 with Designer non-adjustable stands and optional Designer color inset panels

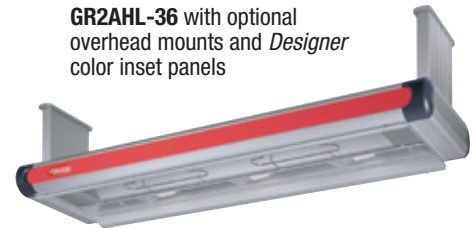

GR2AHL-36 with optional overhead mounts and Designer color inset panels

DESIGNER INFRARED ALUMINUM STRIP HEATERS

Model*	Width	Watts	Ship Weight*
Standard Watt			
GR2A-18	21½"	250	28 lbs.
GR2A-24	27½"	350	32 lbs.
GR2A-30	33½"	450	35 lbs.
GR2A-36	39½"	575	37 lbs.
GR2A-42	45½"	675	53 lbs.
GR2A-48	51½"	800	64 lbs.
GR2A-54	57½"	925	74 lbs.
GR2A-60	63½"	1050	82 lbs.
GR2A-66	69½"	1160	91 lbs.
GR2A-72	75½"	1275	100 lbs.
GR2A-84▼	87½"	1500	120 lbs.
High Watt			
GR2AH-18	21½"	350	28 lbs.
GR2AH-24	27½"	500	32 lbs.
GR2AH-30	33½"	660	35 lbs.
GR2AH-36	39½"	800	37 lbs.
GR2AH-42	45½"	950	53 lbs.
GR2AH-48	51½"	1100	64 lbs.
GR2AH-54	57½"	1250	74 lbs.
GR2AH-60	63½"	1400	82 lbs.
GR2AH-66▼	69½"	1560	91 lbs.
GR2AH-72▼	75½"	1725	100 lbs.
GR2AH-84▲	87½"	2050	120 lbs.


* When no color is specified, color inset panels and corner caps will be black.
 * Does not include Remote Control Enclosure (RMB).
 ▼ When using an infinite control with 120V Model, additional switch(es) and tandem (end-to-end) elements required.
 ▲ 120V Models require additional switches and tandem (end-to-end) elements.

All Designer Infrared Strip Heaters Feature:

Voltage: 120, 208 or 240, single phase only.
Switch Location: Remote only (see page 29 and 30).
Leads: 5' leads through ½" conduit in leg cavity.
Dimensions without Stands: 21½"-87½"W x 9"D x 3½"H.

OPTIONS – PAGE 22

RECOMMENDED MOUNTING HEIGHTS – PAGE 28




ONE YEAR ON-SITE PARTS AND LABOR WARRANTY, PLUS ONE ADDITIONAL YEAR PARTS-ONLY WARRANTY ON ALL GLO-RAY® METAL SHEATHED HEATING ELEMENTS.

**Glo-Ray® Designer
Infrared Strip Heaters
with Lights**



GR2AHL-24 with *Designer* non-adjustable stands optional sneeze guards and *Designer* color inset panels

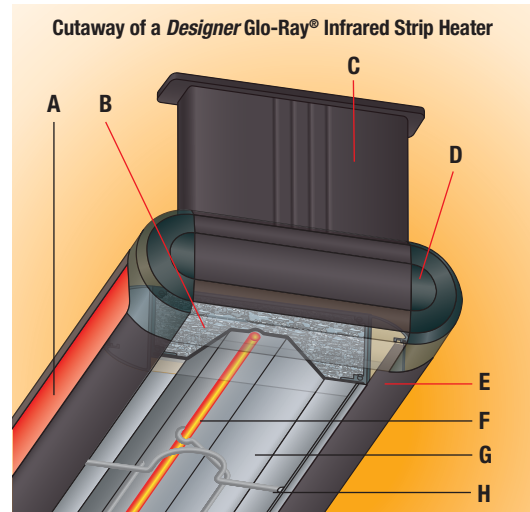

DESIGNER ALUMINUM STRIP HEATERS WITH LIGHTS

Model*	No. of Bulbs	Width	Watts	Ship Weight*
Standard Watt				
GR2AL-18	2	21½"	370	28 lbs.
GR2AL-24	2	27½"	470	32 lbs.
GR2AL-30	2	33½"	570	35 lbs.
GR2AL-36	3	39½"	755	37 lbs.
GR2AL-42	3	45½"	855	53 lbs.
GR2AL-48	4	51½"	1040	64 lbs.
GR2AL-54	4	57½"	1165	74 lbs.
GR2AL-60	5	63½"	1350	83 lbs.
GR2AL-66	5	69½"	1460	93 lbs.
GR2AL-72	6	75½"	1635	101 lbs.
GR2AL-84▼	7	87½"	1920	123 lbs.
High Watt				
GR2AHL-18	2	21½"	470	28 lbs.
GR2AHL-24	2	27½"	620	32 lbs.
GR2AHL-30	2	33½"	780	35 lbs.
GR2AHL-36	3	39½"	980	37 lbs.
GR2AHL-42	3	45½"	1130	53 lbs.
GR2AHL-48	4	51½"	1340	64 lbs.
GR2AHL-54	4	57½"	1490	74 lbs.
GR2AHL-60	5	63½"	1700	83 lbs.
GR2AHL-66▼	5	69½"	1860	93 lbs.
GR2AHL-72▼	6	75½"	2085	101 lbs.
GR2AHL-84▲	7	87½"	2470	123 lbs.

* When no color is specified, color inset panels and corner caps will be black.

* Does not include Remote Control Enclosure (RMB).

▼ When using an infinite control with 120V Model, additional switch(es) and tandem (end-to-end) elements required.

▲ 120V Models require additional switches and tandem (end-to-end) elements.

All Designer Infrared Strip Heaters with Lights Feature:

Voltage: 120, 120/208 or 120/240, single phase only.

Switch Location: Remote only (see page 29 and 30).

Leads: 5' leads through ½" conduit in leg cavity.

Dimensions without Stands: 21½"-87½"W x 12"D x 3½"H.

OPTIONS – PAGE 22

RECOMMENDED MOUNTING HEIGHTS – PAGE 28

- A** Choice of seven *Designer* color inset panels and attractive styling for front-of-the-house applications
- B** Heavy-duty insulation minimizes heat loss
- C** Decorative post concealing the power wiring available for counter or overhead mounting
- D** Accent color corners available in dark gray or black (standard)
- E** Sturdy aluminum extrusion construction; available in clear anodized aluminum finish or one of seven *Designer* colors for housings (shown in optional *Designer* Black)
- F** Long life metal sheathed heating element with two year warranty
- G** Aluminized reflectors won't discolor, so heat can be reflected and directed to the food product being held
- H** Wire guard supports heating element and provides operator safety without affecting heat distribution



ONE YEAR ON-SITE PARTS AND LABOR WARRANTY, PLUS ONE ADDITIONAL YEAR PARTS-ONLY WARRANTY ON ALL GLO-RAY® METAL SHEATHED HEATING ELEMENTS.



GR2AHL-84 with standard *Designer* non-adjustable stands and optional *Designer* color and sneeze guards

OPTIONS (available at time of purchase only)

Designer Colors, Aluminum Models 21½"-87½" (includes Stands) – Non-standard colors are non-returnable –

COLOR-6	9" Housing for GR2A and GR2AH Models (select color)						
COLOR-9	12" Housing for GR2AL and GR2AHL Models (select color)						
RED	Warm Red	GRAY	Gray Granite	NAVY	Navy Blue	COPPER	Antique Copper
BLACK	Black	WHITE	White Granite	GREEN	Hunter Green		

Designer Inset Panel Colors – Black Standard – Non-standard colors are non-returnable –

RED	Warm Red	GRAY	Gray Granite	NAVY	Navy Blue	COPPER	Antique Copper
BLACK	Black	WHITE	White Granite	GREEN	Hunter Green		

Designer Corner Caps – Black Standard –

BLACK	Black Corner Caps	DKGRAY	Dark Gray Corner Caps
--------------	-------------------	---------------	-----------------------

RMB Required Remote Control Enclosure (available in *Designer* Colors or Gloss Finishes – Non-standard colors are non-returnable) – (see page 29 and 30 for Models)

Designer Remote Control Enclosures – Non-standard colors are non-returnable –

RMB-COLOR	Remote Control Housing in <i>Designer</i> Color						
RED	Warm Red	GRAY	Gray Granite	NAVY	Navy Blue	COPPER	Antique Copper
BLACK	Black	WHITE	White Granite	GREEN	Hunter Green		

7.5BP1	7½" Sneeze Guard, one side
7.5BP2	7½" Sneeze Guard, two sides
14BP1	14" Sneeze Guard, one side
14BP2	14" Sneeze Guard, two sides
NTL2-10, 12, 16	<i>Designer</i> Non-Adjustable Stands: 10", 12" or 16" in lieu of 14" standard Stands – Non-standard colors are non-returnable –
NTH2-4	4" <i>Designer</i> Overhead Mounts in lieu of 14" standard Legs – Non-standard colors are non-returnable –
HAL	Halogen Bulb in lieu of standard Display Light (60 Watt)
LIGHTS-ADD'L	Extra Lamps – Installed (max. two per ft. less one – one per foot is standard)

Leads (must specify lead length) –

LEADS5	1'-5' Extended Electrical Leads
LEADS10	6'-10' Extended Electrical Leads
LEADS15	11'-15' Extended Electrical Leads
LEADS20	16'-20' Extended Electrical Leads


COLORS AND FINISHES – PAGE 31

Glo-Ray® Designer Dual Infrared Strip Heaters

Glo-Ray® Designer Aluminum Dual Infrared Strip Heaters allow side-by-side mounting of two warmers to provide a deeper holding area, keeping hot food at optimum serving temperatures. These modern front-of-the-house warmers have 3" spacers standard with optional 6" spacers. Units are available in Designer Colors to match most décors.

- Sturdy continuous aluminum housings eliminate sagging
- Pre-focused heat pattern directs heat from a tubular element to bathe the entire holding surface, holding food safely
- Available in widths from 21½" to 87½"
- Variety of models, configurations, colors and accessories provide unlimited flexibility. Non-standard colors are non-returnable

- Optional sneeze guards that meet food safety standards can be ordered for display areas and buffet lines
- Optional shatter-resistant incandescent lights available
- Black corner caps and inset panels standard

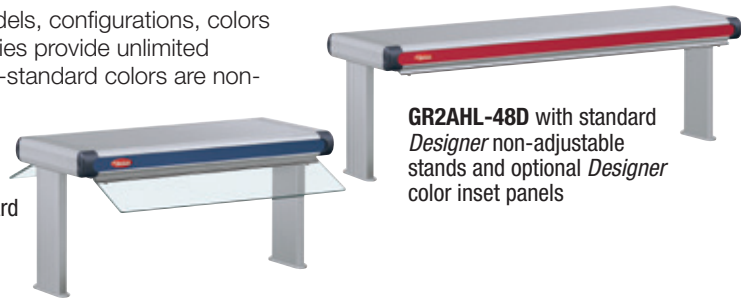

GR2AHL-48D with standard Designer non-adjustable stands and optional Designer color inset panels

Toggle Switch: Max. 15 amps
Infinite Switch: Max. 12.2 amps

GR2AH-24D with standard Designer non-adjustable stands, optional sneeze guards and optional Designer color inset panels

DESIGNER ALUMINUM DUAL STRIP HEATERS

Model*	Width	Watts	Ship Weight*
Standard Watt			
GR2A-18D	21½"	500	44 lbs.
GR2A-24D	27½"	700	48 lbs.
GR2A-30D	33½"	900	52 lbs.
GR2A-36D	39½"	1150	57 lbs.
GR2A-42D	45½"	1350	66 lbs.
GR2A-48D	51½"	1600	77 lbs.
GR2A-54D	57½"	1850	88 lbs.
GR2A-60D	63½"	2100	97 lbs.
GR2A-66D	69½"	2320	107 lbs.
GR2A-72D	75½"	2550	117 lbs.
GR2A-84D	87½"	3000	138 lbs.

Model*	Width	Watts	Ship Weight*
High Watt			
GR2AH-18D	21½"	700	44 lbs.
GR2AH-24D	27½"	1000	48 lbs.
GR2AH-30D	33½"	1320	52 lbs.
GR2AH-36D	39½"	1600	57 lbs.
GR2AH-42D	45½"	1900	66 lbs.
GR2AH-48D	51½"	2200	77 lbs.
GR2AH-54D	57½"	2500	88 lbs.
GR2AH-60D	63½"	2800	97 lbs.
GR2AH-66D	69½"	3120	107 lbs.
GR2AH-72D	75½"	3450	117 lbs.
GR2AH-84D*	87½"	4100	138 lbs.

* When no color is specified, color inset panels and corner caps will be black.
* Does not include Remote Control Enclosure (RMB).
■ 120V Models with infinite controls not available.
* 120V Models not available.

All Designer Dual Strip Heaters Feature:

Voltage: Models without Lights: 120, 208 or 240, single phase only.
Switch Location: Remote only (see page 29 and 30).
Leads: 5' leads through ½" conduit in leg cavity.
Dimensions: with 3" Spacer (standard): 21½"-87½"W x 18"D x 3½"H.
with 6" Spacer: 21½"-87½"W x 21"D x 3½"H.

OPTIONS – PAGE 24

RECOMMENDED MOUNTING HEIGHTS – PAGE 28

DESIGNER ALUMINUM DUAL STRIP HEATERS WITH LIGHTS


Model*	No. of Bulbs	Width	Watts	Ship Weight*
Standard Watt				
GR2AL-18D	2	21½"	620	44 lbs.
GR2AL-24D	2	27½"	820	48 lbs.
GR2AL-30D	2	33½"	1020	53 lbs.
GR2AL-36D	3	39½"	1330	58 lbs.
GR2AL-42D	3	45½"	1530	67 lbs.
GR2AL-48D	4	51½"	1840	79 lbs.
GR2AL-54D	4	57½"	2090	91 lbs.
GR2AL-60D	5	63½"	2400	100 lbs.
GR2AL-66D	5	69½"	2620	110 lbs.
GR2AL-72D	6	75½"	2910	120 lbs.
GR2AL-84D	7	87½"	3420	141 lbs.

Model*	No. of Bulbs	Width	Watts	Ship Weight*
High Watt				
GR2AHL-18D	2	21½"	820	44 lbs.
GR2AHL-24D	2	27½"	1120	48 lbs.
GR2AHL-30D	2	33½"	1440	53 lbs.
GR2AHL-36D	3	39½"	1780	58 lbs.
GR2AHL-42D	3	45½"	2080	67 lbs.
GR2AHL-48D	4	51½"	2440	79 lbs.
GR2AHL-54D	4	57½"	2740	91 lbs.
GR2AHL-60D	5	63½"	3100	100 lbs.
GR2AHL-66D	5	69½"	3420	110 lbs.
GR2AHL-72D	6	75½"	3810	120 lbs.
GR2AHL-84D*	7	87½"	4520	141 lbs.

* When no color is specified, color inset panels and corner caps will be black.
* Does not include Remote Control Enclosure (RMB).
■ 120V Models with infinite controls not available.
* 120V Models not available.

All Designer Dual Strip Heaters Lights Feature:

Voltage: Models with Lights: 120, 120/208 or 120/240, single phase only.
Switch Location: Remote only (see page 29 and 30).
Leads: 5' leads through ½" conduit in leg cavity.
Dimensions: with 3" Spacer (standard): 21½"-87½"W x 18"D x 3½"H.
with 6" Spacer: 21½"-87½"W x 21"D x 3½"H.





GR2AHL-30D

OPTIONS (available at time of purchase only)

Designer Colors, Aluminum Models 21½"-87½" (includes Stands) – Non-standard colors are non-returnable –
COLOR-15, -18 15" and 18" Housings for GR2A, GR2AH, GR2AL and GR2AHL Dual Models

RED	Warm Red	GRAY	Gray Granite	NAVY	Navy Blue	COPPER	Antique Copper
BLACK	Black	WHITE	White Granite	GREEN	Hunter Green		

Designer Inset Panel Colors – Black Standard –

RED	Warm Red	GRAY	Gray Granite	NAVY	Navy Blue	COPPER	Antique Copper
BLACK	Black	WHITE	White Granite	GREEN	Hunter Green		

Designer Corner Caps – Black Standard –

BLACK	Black Corner Caps	DKGRAY	Dark Gray Corner Caps
--------------	-------------------	---------------	-----------------------

RMB Required Remote Control Enclosure (available in *Designer Colors* or *Gloss Finishes* – Non-standard colors are non-returnable) – (see page 29 and 30 for Models)

Designer Remote Control Enclosures – Non-standard colors are non-returnable –

RMB-COLOR	Remote Control Housing in <i>Designer Color</i>						
RED	Warm Red	GRAY	Gray Granite	NAVY	Navy Blue	COPPER	Antique Copper
BLACK	Black	WHITE	White Granite	GREEN	Hunter Green		

7.5BP1 7½" Sneeze Guard, one side

7.5BP2 7½" Sneeze Guard, two sides

14BP1 14" Sneeze Guard, one side

14BP2 14" Sneeze Guard, two sides

NTL2-10, 12, 16 *Designer* Non-Adjustable Stands: 10", 12" or 16" in lieu of 14" standard Stands – Non-standard colors are non-returnable –

NTH2-4 4" *Designer* Overhead Mounts in lieu of 14" standard Stands – Non-standard colors are non-returnable –

HAL Halogen Bulb in lieu of standard Display Light (60 Watt)

LIGHTS-ADD'L Extra Lamps – Installed (max. two per ft. less one – one per foot is standard)

Leads (must specify lead length) –

LEADS5	1'-5' Extended Electrical Leads
LEADS10	6'-10' Extended Electrical Leads
LEADS15	11'-15' Extended Electrical Leads
LEADS20	16'-20' Extended Electrical Leads

COLORS AND FINISHES – PAGE 31


Ultra-Glo® Ceramic Infrared Strip Heaters

Hatco Ultra-Glo® Ceramic Strip Heaters provide the ultimate holding power. Increased heights improve working clearances and the heat zone blankets the entire holding area. All models include adjustable angle brackets for mounting. Available with or without lights, with attached or remote control box enclosure (recommended).



UGAH-18 optional Gloss finish and requires remote control box (not shown)

- Pre-focused pyramidal heat pattern concentrates the heat at the edges where heat loss is greatest
- Increased height that the ceramic heat source affords improves operational working clearances, giving the chef and server an improved ergonomic environment in which to work
- Adaptable to many locations and configurations, including back- or front-of-the-house use, open kitchen concepts or buffet lines
- Available in widths from 18" to 72" in 6" increments
- Optional coated shatter-resistant incandescent or halogen bulbs enhance product display while safeguarding food from bulb breakage

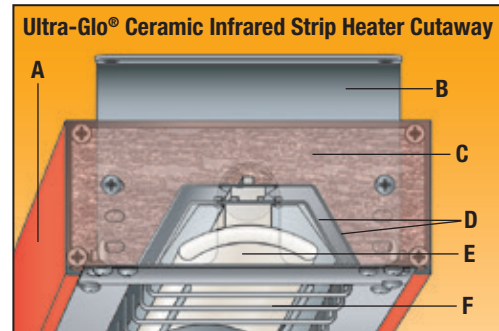

- A** Sturdy aluminum housings that do not sag
- B** Adjustable standard mounting bracket (allows 3 different mounting heights and allows for conduit connection to end of the unit)
- C** Heavy-duty insulation surrounds heating element to keep exterior housing cooler and minimize heat loss
- D** Dual aluminized steel reflector keeps housing cooler, focuses more heat towards the food
- E** Shape of element focuses heat on the food
- F** Wire guards protect users from incidental contact with the elements

ALUMINUM CERAMIC STRIP HEATERS

Model	Width	Voltage		Watts	Ship Weight*
		Single Phase Only			
Standard Watt					
UGA-18	18"	120, 208, 240		490	9 lbs.
UGA-24	24"	120, 208, 240		675	10 lbs.
UGA-30	30"	120, 208, 240		750	11 lbs.
UGA-36	36"	120, 208, 240		980	12 lbs.
UGA-42	42"	120, 208, 240		1120	13 lbs.
UGA-48	48"	120, 208, 240		1470	14 lbs.
UGA-54	54"	208, 240		1470	16 lbs.
UGA-60	60"	208, 240		1960	17 lbs.
UGA-66	66"	208, 240		1960	19 lbs.
UGA-72	72"	208, 240		1960	20 lbs.
High Watt					
UGAH-18	18"	120, 208, 240		675	9 lbs.
UGAH-24	24"	120, 208, 240		750	10 lbs.
UGAH-30	30"	120, 208, 240		1125	11 lbs.
UGAH-36	36"	120, 208, 240		1350	12 lbs.
UGAH-42	42"	120, 208, 240		1500	13 lbs.
UGAH-48	48"	208, 240		2025	14 lbs.
UGAH-54	54"	208, 240		2250	16 lbs.
UGAH-60	60"	208, 240		2700	17 lbs.
UGAH-66	66"	208, 240		2700	19 lbs.
UGAH-72	72"	208, 240		3000	20 lbs.

ALUMINUM CERAMIC STRIP HEATERS WITH LIGHTS

Model	No. of Bulbs	Width	Voltage		Watts	Ship Weight*
			Single Phase Only			
Standard Watt						
UGAL-18	1	18"	120, 120/208, 120/240		550	12 lbs.
UGAL-24	2	24"	120, 120/208, 120/240		795	13 lbs.
UGAL-30	2	30"	120, 120/208, 120/240		870	15 lbs.
UGAL-36	3	36"	120, 120/208, 120/240		1160	17 lbs.
UGAL-42	3	42"	120, 120/208, 120/240		1300	18 lbs.
UGAL-48	4	48"	120, 120/208, 120/240		1710	20 lbs.
UGAL-54	4	54"	120/208, 120/240		1710	22 lbs.
UGAL-60	5	60"	120/208, 120/240		2260	23 lbs.
UGAL-66	5	66"	120/208, 120/240		2260	25 lbs.
UGAL-72	6	72"	120/208, 120/240		2320	27 lbs.
High Watt						
UGAHL-18	1	18"	120, 120/208, 120/240		735	12 lbs.
UGAHL-24	2	24"	120, 120/208, 120/240		870	13 lbs.
UGAHL-30	2	30"	120, 120/208, 120/240		1245	15 lbs.
UGAHL-36	3	36"	120, 120/208, 120/240		1530	17 lbs.
UGAHL-42	3	42"	120, 120/208, 120/240		1680	18 lbs.
UGAHL-48	4	48"	120/208, 120/240		2265	20 lbs.
UGAHL-54	4	54"	120/208, 120/240		2490	22 lbs.
UGAHL-60	5	60"	120/208, 120/240		3000	23 lbs.
UGAHL-66	5	66"	120/208, 120/240		3000	25 lbs.
UGAHL-72	6	72"	120/208, 120/240		3360	27 lbs.

* Does not include Remote Control Enclosure (RMB).

All Ceramic Strip Heaters Feature:

Models Shipped with: Angle Brackets and Leads (3' conduit whip).

Dimensions with Attached Control Box, Toggle and Indicator Light:

18"-72"W x 9 7/8"D x 2 1/2"H.


Dimensions with Remote Control Enclosure, Toggle and Indicator Light:

18"-72"W x 6"D x 2 1/2"H.

OPTIONS AND REMOTE BOXES – PAGE 27

RECOMMENDED MOUNTING HEIGHTS – PAGE 28

ALL CERAMIC HEATING ELEMENTS WARRANTED AGAINST BURNOUT FOR ONE YEAR.






Ultra-Glo® Ceramic Dual Infrared Strip Heaters

Hatco Ultra-Glo® Ceramic Strip Heaters provide the ultimate holding power. Increased height improves working clearances and the heat zone blankets the entire holding area. All models include adjustable angle brackets for mounting. Dual mounted strip heaters accommodate wider food holding areas.

- Increased height improves operational working clearances, giving chef and server an improved ergonomic environment in which to work
- Adaptable to any location and configuration, including back- or front-of-the-house use, open kitchen concepts or buffet lines
- Available in widths from 18" to 72"
- Sturdy extruded aluminum housings eliminate sagging
- Pre-focused heat pattern provides an increased pyramidal dimension, concentrating heat at the edges where heat loss is the greatest
- Remote control enclosure with toggle switch, indicator light and wiring for convenient control placement

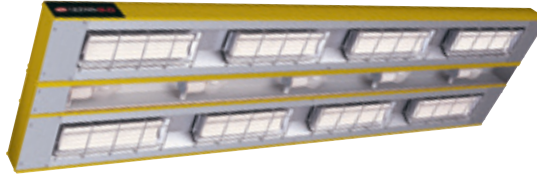

UGAHL-60D with optional Gloss finish and lights in a 3" spacer. Remote control enclosure required (not shown)

ALUMINUM DUAL CERAMIC STRIP HEATERS

Model	Width	Voltage		
		Single Phase Only	Watts	Ship Weight*
Standard Watt				
UGA-18D	18"	120, 208, 240	980	17 lbs.
UGA-24D	24"	120, 208, 240	1350	19 lbs.
UGA-30D	30"	120, 208, 240	1500	21 lbs.
UGA-36D	36"	208, 240	1960	24 lbs.
UGA-42D	42"	208, 240	2240	27 lbs.
UGA-48D	48"	208, 240	2940	30 lbs.
UGA-54D	54"	208, 240	2940	33 lbs.
UGA-60D	60"	208, 240	3920	37 lbs.
UGA-66D	66"	208, 240	3920	40 lbs.
UGA-72D	72"	208, 240	3920	44 lbs.
High Watt				
UGAH-18D	18"	120, 208, 240	1350	17 lbs.
UGAH-24D	24"	120, 208, 240	1500	19 lbs.
UGAH-30D	30"	208, 240	2250	21 lbs.
UGAH-36D	36"	208, 240	2700	24 lbs.
UGAH-42D	42"	208, 240	3000	27 lbs.
UGAH-48D	48"	208, 240	4050	30 lbs.
UGAH-54D	54"	208, 240	4500	33 lbs.
UGAH-60D	60"	208, 240	5400	37 lbs.
UGAH-66D	66"	208, 240	5400	40 lbs.
UGAH-72D	72"	208, 240	6000	44 lbs.

ALUMINUM DUAL CERAMIC STRIP HEATERS WITH LIGHTS


Model	No. of Bulbs	Width	Voltage		
			Single Phase Only	Watts	Ship Weight*
Standard Watt					
UGAL-18D	1	18"	120, 120/208, 120/240	1040	17 lbs.
UGAL-24D	2	24"	120, 120/208, 120/240	1470	19 lbs.
UGAL-30D	2	30"	120, 120/208, 120/240	1620	21 lbs.
UGAL-36D	3	36"	120/208, 120/240	2140	24 lbs.
UGAL-42D	3	42"	120/208, 120/240	2420	27 lbs.
UGAL-48D	4	48"	120/208, 120/240	3180	30 lbs.
UGAL-54D	4	54"	120/208, 120/240	3180	33 lbs.
UGAL-60D	5	60"	120/208, 120/240	4220	37 lbs.
UGAL-66D	5	66"	120/208, 120/240	4220	40 lbs.
UGAL-72D	6	72"	120/208, 120/240	4280	44 lbs.
High Watt					
UGAHL-18D	1	18"	120, 120/208, 120/240	1410	17 lbs.
UGAHL-24D	2	24"	120, 120/208, 120/240	1620	19 lbs.
UGAHL-30D	2	30"	120/208, 120/240	2370	21 lbs.
UGAHL-36D	3	36"	120/208, 120/240	2880	24 lbs.
UGAHL-42D	3	42"	120/208, 120/240	3180	27 lbs.
UGAHL-48D	4	48"	120/208, 120/240	4290	30 lbs.
UGAHL-54D	4	54"	120/208, 120/240	4790	33 lbs.
UGAHL-60D	5	60"	120/208, 120/240	5700	37 lbs.
UGAHL-66D	5	66"	120/208, 120/240	5700	40 lbs.
UGAHL-72D	6	72"	120/208, 120/240	6360	44 lbs.

* Does not include Remote Control Enclosure (RMB).

All Ceramic Dual Strip Heaters Feature:

Models Shipped with: Angle Brackets and Leads (3' conduit whip).
 Dimensions with Attached Control Box, Toggle and Indicator Light: 18" - 72"W x 18½" or 21¾"D x 2½"H.
 Dimensions with Remote Control Enclosure, Toggle and Indicator Light: 18" - 72"W x 15" or 18"D x 2½"H.

ALL CERAMIC HEATING ELEMENTS WARRANTED AGAINST BURNOUT FOR ONE YEAR.

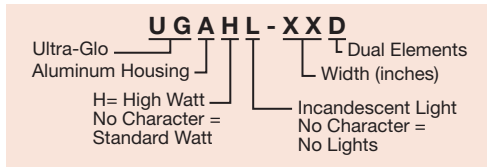

OPTIONS AND REMOTE BOXES – PAGE 27
RECOMMENDED MOUNTING HEIGHTS – PAGE 28



UGAH-36D with 3" spacer.
Remote Control Enclosure
recommended (not shown)

OPTIONS (available at time of purchase only)

Designer Colors, Aluminum Models 18"-72" – Non-standard colors are non-returnable –

COLOR-6	6" Housing for Single UGA and UGAH Models, 18"- 72" (select color)				
COLOR-9	9" Housing for Single UGAL and UGAHL Models, 18"- 72" (select color)				
COLOR-15, -18	15" and 18" Housings for Dual UGA, UGAH, UGAL, UGAHL Models, 18"- 72" (select color)				
	RED Warm Red	GRAY Gray Granite	NAVY Navy Blue	COPPER Antique Copper	
	BLACK Black	WHITE White Granite	GREEN Hunter Green		

Gloss Finishes, Aluminum Models 18"- 72" – Non-standard colors are non-returnable –

GLOSS-6	6" Housing for Single UGA and UGAH Models, 18"- 72" (select finish)				
GLOSS-9	9" Housing for Single UGAL and UGAHL Models, 18"- 72" (select finish)				
GLOSS-15, -18	15" and 18" Housings for Dual UGA, UGAH, UGAL, UGAHL Models, 18"- 72" (select finish)				
	RRED Radiant Red	GGRAY Glossy Gray	BBLACK Bold Black		
	GGOLD Gleaming Gold	BBLUE Brilliant Blue			

Designer Colors, Remote Control Enclosures – Non-standard colors are non-returnable –

RMB-COLOR	Remote Control Housing in Designer Color				
	RED Warm Red	GRAY Gray Granite	NAVY Navy Blue	COPPER Antique Copper	
	BLACK Black	WHITE White Granite	GREEN Hunter Green		

Gloss Finishes, Remote Control Enclosures – Non-standard colors are non-returnable –

RMB-GLOSS	Remote Control Housing in Gloss Finish				
	RRED Radiant Red	GGRAY Glossy Gray	BBLACK Bold Black		
	GGOLD Gleaming Gold	BBLUE Brilliant Blue			

HAL	Halogen Bulb in lieu of standard Display Light (60 Watt)
LIGHTS ADD'L	Extra Lamps – Installed (max. two per ft. less one – one per foot is standard) (not available for Dual Models)
UGA-NTL-14, -16	Non-Adjustable Tubular Stands (specify 14" or 16" clearance)
UGA-NTL-18, -20	Non-Adjustable Tubular Stands (specify 18" or 20" clearance)
UGA-NTL-22	Non-Adjustable Tubular Stands (for 22" clearance)
UGA-NTL-18-D, -20 -D	Non-Adjustable Tubular Stands (specify 18" or 20" clearance)
UGA-NTL-22-D, -24-D, -26-D	Non-Adjustable Tubular Stands (specify 22", 24" or 26" clearance)
NTL-PAINT	Designer Color or Gloss Finish for Non-Adjustable Tubular Stands – Non-standard colors are non-returnable –
NTL-PAINT-D	Designer Color or Gloss Finish for Non-Adjustable Tubular Stands – Non-standard colors are non-returnable –

Leads (must specify lead length) –

HT-LEADS5	1'-5' Extended Electrical Leads
HT-LEADS10	6'-10' Extended Electrical Leads
HT-LEADS15	11'-15' Extended Electrical Leads
HT-LEADS20	16'-20' Extended Electrical Leads
RMB-UGA	Remote Control Enclosure with Toggle Control and Indicator in lieu of attached Control Box (Designer Colors and Gloss Finishes available)
RMB-UGA-INF	Remote Control Enclosure with Toggle Switch, Electronic Infinite Control, Relay and Indicator Light in lieu of attached Control Box (Designer Colors and Gloss Finishes available)

COLORS AND FINISHES – PAGE 31



RMB-UGA-INF



Details Of Strip Heater Recommended Range Above Target*

(Based on 24" Strip Heaters)

Strip Heater Spacing Requirements

GLO-RAY® INFRARED HEATING ELEMENT

Singles (GRA, GRAL, GRAH, GRAHL GRN)

Singles Designer (GR2A, GR2AH, GR2AL, GR2AHL) –

Combustibles: 13½" high watt or 10" standard watt below, 1" above and 3" to back wall. Non-combustibles: 1" above, 10" below for high watt with infinite or indicator lamp and 8" below for high watt toggle or standard watt. Must be installed in a pass-through area. Units with remote switches may be installed against a non-combustible back wall, flush to an overshelf and 8" to a surface below. Maximum 10" setback from the front of an overshelf. Models with cords must be installed 3" below an overshelf and 11" high watt or 10" standard watt over a surface below.

Duals (GRA-D, GRAH-D, GRAL-D, GRAHL-D) –

Duals Designer (GR2A-D, GR2AH-D, GR2AL-D, GR2AHL-D) – May not be installed in combustible surroundings. Non-combustibles: 1" above, 10" below. Must be installed in a pass-through area. Units with remote switches may be installed 3" from a non-combustible back wall, 8" from surface below and flush to an overshelf. Maximum 10" setback from the front of an overshelf.

Singles Max-Watt (GRAM, GRAML) –

May not be installed in combustible surroundings. Non-combustibles: 1" above, 12" to surface and 3" from a back wall. Cord connected: 3" below an overshelf, 12" from surface below. **Maximum 10" setback from the front of an overshelf.**

Duals Max-Watt (GRAM-D, GRAML-D) –

May not be installed in combustible surroundings. Non-combustibles: units may be installed 3" from a non-combustible back wall, 1" below an overshelf, 15" to surface below. Maximum 10" setback from the front of an overshelf.

ULTRA-GLO®

Singles and Duals (UGA, UGA-D, UGAH, UGAH-D, UGAL, UGAL-D, UGAHL, UGAHL-D) – May not be installed in combustible surroundings.

Non-combustibles: 1" above, 17" high watt or 14" standard watt from a surface below and 3" from a back wall.

Dual Mounting: Do not mount warmers side by side (dual mounting) with less than a 3" space between units.

GLO-RAY® INFRA-BLACK®

Singles (GRAIH, GRAIHL, GRAIHL-D, GRAIH-D) –

May not be installed in combustible surroundings. Non-combustibles: 1" above and 4" below. Must be installed in a pass-through area. Units with remote switches may be installed 3" from a non-combustible back wall and flush to an overshelf. Maximum 10" setback from the front of an overshelf.

GLO-RAY® NARROW HALOGEN


Singles (GRN4, GRN4L) –

Combustibles: Minimum of 10" above surface and 2" from a back wall. Non-Combustibles: 7" above and 2" from a back wall.


DEPTH OF HEAT PATTERN AT RECOMMENDED ELEMENT HEIGHT

* Recommended single unit application without base heat, based on ideal conditions. Individual applications may vary, consult factory.


Glo-ray® Infrared Heating Element (Recommended range above target)

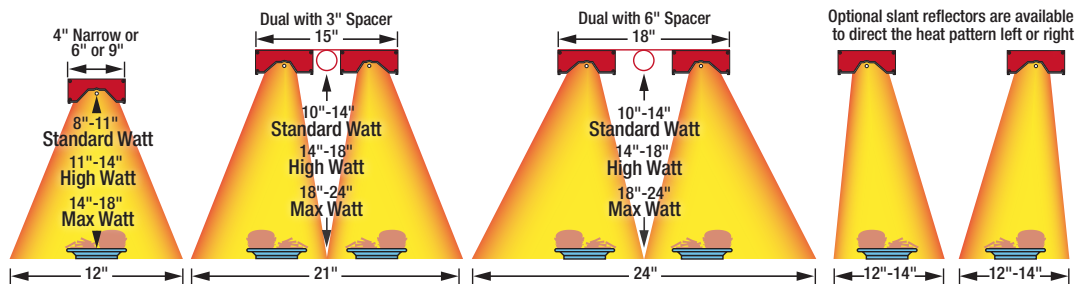


Designer Glo-Ray® Heating Element (Recommended range above target)

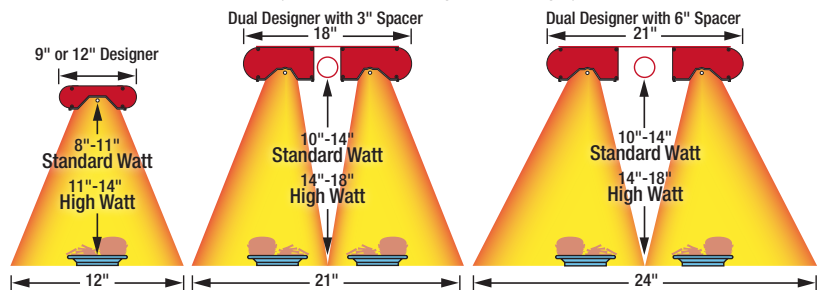


Ultra-Glo® Heating Element (Recommended range above target)

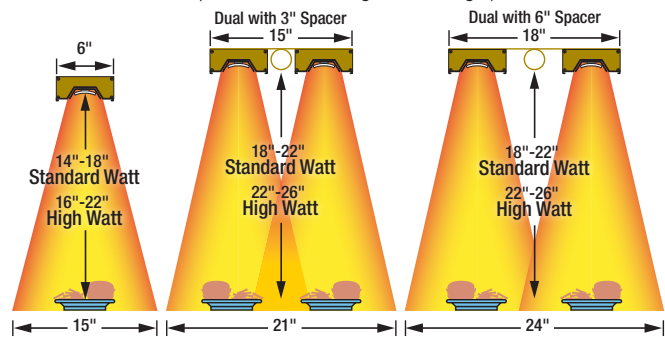


Infra-Black® Heating Element (Recommended range above target)

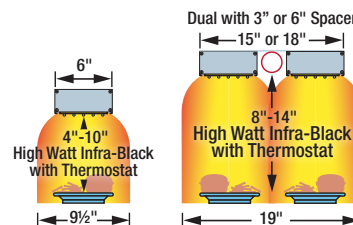

Glo-Ray® Narrow Halogen (Recommended range above target)



Glo-Ray® Mounting Arrangements

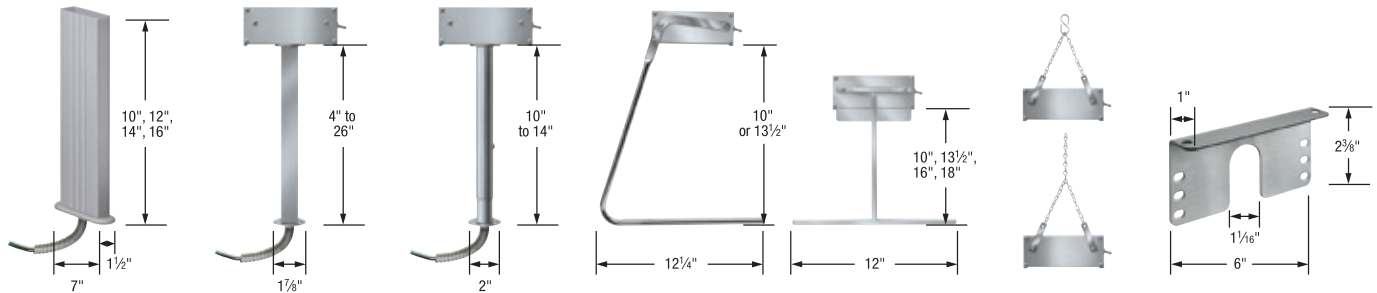

Designer Non-Adjustable Stands

(GR2A series only)
Sturdy stands conceal all hook-up wiring. Available in Designer colors.

Non-Adjustable Tubular Stands

Sturdy stands conceal all hook-up wiring. Available in Designer colors. Duals require two pair. Specify power location.

Adjustable Tubular Stands

Sturdy tubular stands conceal all hook-up wiring. Duals require two pair (not available on Max Watt or Ultra-Glo models). Specify power location.

C-Leg Stands

Attractive chrome plated legs allow easy relocation of the warmer. For models 6" or less in width (not available on Max Watt or Ultra-Glo models).

T-Leg Stands

Provide rigid stability and allow for more pass-through area below unit. For models 6" or less in width (not available on Max Watt or Ultra-Glo models).

Chain Suspension

Chains attach to tabs provided with warmers and are available in various lengths to suit the location (not available on Max Watt or Ultra-Glo models).

Angle brackets

Special adjustable angle brackets fit 6" or 9" housings for mounting Glo-Ray under a shelf. Provides 1"-2" space between Glo-Ray and overshef. Duals require two pair. (Standard on Max Watt or Ultra-Glo models).

Remote Control Enclosures

- 1 Find the volt and current (amp) rating for the Strip Heater(s) the RMB2 will be controlling. This is the total current of all circuits on the warmer(s).
- 2 If the current rating is under 20 amps, then select an RMB2-1R, if the current rating is between 20 and 40 amps, select the RMB2-2R. The RMB2-2R has two 20 amp outputs.
- 3 Select the current (amp) rating of the RMB2 that is just above the total current rating of the warmer(s) it will control. The RMB2 will need to be connected to a branch circuit breaker suitable for its current rating.
- 4 Select the voltage rating for the RMB2 based on the highest voltage rating of the warmer(s). For example, if the warmer(s) is rated 120/208 volts, select a 208 volt RMB2 control.

- Easy to specify, install and service
- Compatible with most Strip Heaters (GR, GRA, GRAH, GRAIH, GR2A, GR2AH, GRN and GRNH series)
- Maximum of 8 amps total allowed on the light circuit
- Total amperage of light and heat combined cannot exceed max amp rating of the control box
- Multiple Strip Heaters may be connected to one RMB2 if the combined current draw of the warmers is less than the rating of the RMB2. All warmers will be controlled with same set-point



RMB2-1R
with one relay



RMB2-2R
with two relays

REMOTE CONTROL ENCLOSURES (RMB)

Model	Description	Voltage
1 Toggle, 1 Infinite, 1 Relay, 1 Indicator		
RMB2-1R	12 Max. Amps	120, 208, 240
	16 Max. Amps	120, 208, 240
	20 Max. Amps	120, 208, 240
1 Toggle, 1 Infinite, 2 Relays, 1 Indicator		
RMB2-2R	24 Max. Amps	120, 208, 240
	32 Max. Amps	120, 208, 240
	40 Max. Amps	120, 208, 240

All Remote Control Enclosures Feature:

Ship Weight: 6-8 lbs. depending on components.

Dimensions: RMB2-1R: 11"W x 4½"D x 5½"H.

RMB2-2R: 14"W x 4½"D x 5½"H.

Cutout Dimensions: RMB2-1R: 10⅞" W x 4¾" H.

RMB2-2R: 13⅞" W x 4¾" H.



Remote Control Enclosures

Hatco Remote Control Enclosures are built in accordance with UL standards for toggle or infinite switches, indicator lights and wiring, ready for installation when purchased with Glo-Ray® Strip Heaters. When Remote Control Enclosures are used, no more than one RMB per strip heater and no more than one strip heater per RMB.

- Built for toggle or infinite switches, indicator lights and wiring
- One RMB per strip heater
- Consult RMB configurator for specific details at www.hatcocorp.com

RMB-7L with toggle switch and infinite control



RMB-16E with infinite controls, toggle switches and optional *Designer* color



RMB-14E with infinite controls



RMB-3F with toggle switch and indicator light

RMB-7D with toggle switches and optional *Designer* color



REMOTE CONTROL ENCLOSURES (RMB)

Model	Description	Voltage	Width
RMB-3A, -3B, -3C	1 Infinite	120, 208, 240	5½"
RMB-3D	1 Toggle	120, 208, 240	5½"
RMB-3E	2 Toggles	120, 208, 240	5½"
RMB-3F, -3G, -3H	1 Toggle, 1 Indicator	120, 208, 240	5½"
RMB-7A, -7B, -7C	2 Infinities	120, 208, 240	9"
RMB-7D	3 Toggles	120, 208, 240	9"
RMB-7E	4 Toggles	120, 208, 240	9"
RMB-7F, -7G, -7H	1 Infinite, 1 Indicator	120, 208, 240	9"
RMB-7I, -7J, -7K	2 Toggles, 2 Indicators	120, 208, 240	9"
RMB-7L, -7M, -7N	1 Toggle, 1 Infinite	120, 208, 240	9"
RMB-7O, -7P, -7Q	1 Toggle, 1 Infinite, 1 Indicator	120, 208, 240	9"
RMB-14A, -14B, -14C	3 Infinities	120, 208, 240	14"
RMB-14D, -14E, -14F	4 Infinities	120, 208, 240	14"
RMB-14G	5 Toggles	120, 208, 240	14"
RMB-14H	6 Toggles	120, 208, 240	14"
RMB-14I, -14J, -14K	3 Toggles, 3 Indicators	120, 208, 240	14"
RMB-14L, -14M, -14N	2 Infinities, 2 Indicators	120, 208, 240	14"
RMB-14O, -14P, -14Q	2 Toggles, 2 Infinite	120, 208, 240	14"
RMB-14R, -14S, -14T	1 Toggle, 1 Infinite w/ Relay, 1 Indicator	120, 208, 240	14"
RMB-14V, -14W, -14Y	1 Toggle, 2 Infinities	120, 208, 240	14"
RMB-14AA, -14AB	Master Toggle, 1 Electronic Infinite w/ Relay	120, 208, 240	14"
RMB-14AF, -14AG, -14AH	3 Toggles, 2 Indicators	120, 208, 240	14"
RMB-14AI, -14AJ, -14AK	1 Toggle, 3 Infinities	120, 208, 240	14"
RMB-14AL, -14AM, -14AN	1 Toggle, 2 Infinities, 2 Indicators	120, 208, 240	14"
RMB-14AO, -14AP, -14AQ	1 Toggle, 2 Infinities, 3 Indicators	120, 208, 240	14"
RMB-14AR, -14AS, -14AT	1 Infinite w/ Relay, 1 Indicator	120, 208, 240	14"
RMB-16B, -16C, -16D	1 Toggle, 4 Infinities	120, 208, 240	16"
RMB-16E, -16F, -16G	3 Toggles, 2 Infinities	120, 208, 240	16"
RMB-20D, -20E, -20F	3 Toggles, 2 Infinities	120, 208, 240	20"
RMB-20G, -20H, -20I	2 Toggles, 4 Infinities	120, 208, 240	20"
RMB-20J, -20K, -20L	3 Toggles, 4 Infinities, 4 Indicators	120, 208, 240	20"
RMB-20M, -20N, -20P	3 Toggles, 2 Infinities, 2 Indicators	120, 208, 240	20"
RMB-20R, -20S, -20T	2 Toggles, 4 Infinities, 4 Indicators	120, 208, 240	20"
RMB-20AA, -20AB, -20AC	2 Toggles, 2 Infinities, 2 Indicators	120, 208, 240	20"
RMB-20AF, -20AG, -20AH	4 Infinities, 4 Indicators	208, 240, 120	20"
RMB-20AN, -20AO, -20AP	4 Toggles, 4 Indicators	120, 208, 240	20"

Toggle Switch: Max. 15 amps
Infinite Switch: Max. 12.2 amps

All Remote Control Enclosures Feature:

Ship Weight: 2-8 lbs. depending on components.

Max. Allowable Amperage per Switch: Toggle 15.0; Infinite 12.2.

Dimensions (not including switches): 5½", 9", 14", 16" or 20"W x 3"D x 2½"H.

NOTE: See our RMB picker on the Hatco website, www.hatcocorp.com

OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable –

RMB-COLOR	Remote Control Housing in Designer Color						
RED	Warm Red	GRAY	Gray Granite	NAVY	Navy Blue	COPPER	Antique Copper
BLACK	Black	WHITE	White Granite	GREEN	Hunter Green		

Gloss Finishes – Non-standard colors are non-returnable –


RMB-GLOSS	Remote Control Housing in Gloss Finish		
RRED	Radiant Red	GGRAY	Glossy Gray
GGOLD	Gleaming Gold	BBLUE	Brilliant Blue
		BBLACK	Bold Black

COLORS AND FINISHES – PAGE 31




Paint Chip Sample Colors

DESIGNER COLORS

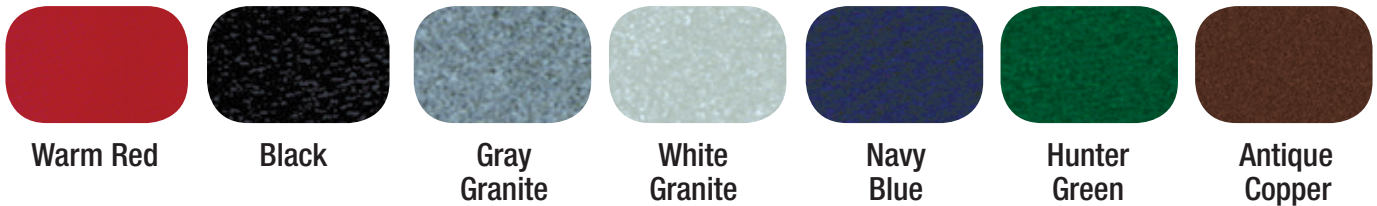

GLOSS FINISHES

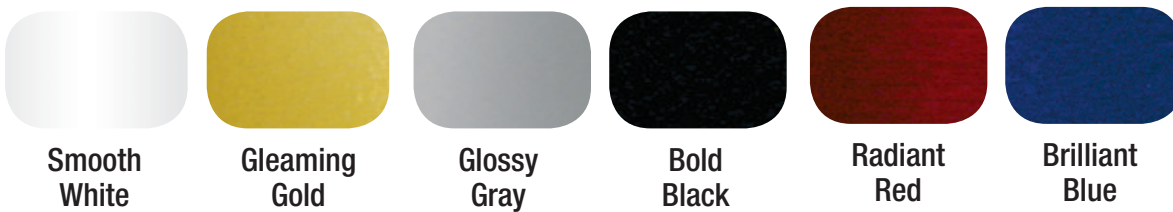

PLATED FINISHES



*Colors are a representation and may not exactly match our colors.
Consult factory for possible color matching options on these colors.
Non-standard colors are non-returnable.*

To order a Hatco Paint Chip & Stone Sample Colors Sheet, visit www.hatcocorp.com / Order Literature / Sales Literature / Sell Sheets.



Scan with web-enabled
mobile device to visit
www.hatcocorp.com



Hatco Corporation

P.O. Box 340500 | Milwaukee WI 53234-0500 USA
800-558-0607 | 414-671-6350 | Fax: 800-543-7521
www.hatcocorp.com | equipsales@hatcocorp.com