



Camshelving® Premium Series

Mobile Starter Units 4 or 5 Vented Shelves

HEIGHT	DEPTHS	LENGTHS
2	3	3
67"	18"	36"
75"	21"	42"
	24"	48"

- **Mobile Starter Units include:**
2 factory assembled mobile post kits, 8 or 10 shelf traverses, shelf plates and 4 premium swivel casters with total locking brake. Units ship complete in 1 box.



Features & Benefits

- Use in walk-in coolers, freezers, dry storage, warewashing areas, loading docks or front of the house. Withstands storage temperatures -36° to 190°F (-38° to 88°C). Impervious to moisture, chemicals, salt, food acids and humidity.
- Posts and traverses have a steel core and smooth polypropylene exterior for superior strength and durability. Traverse dovetails are molded into posts. NOTE: Mobile units require Mobile Posts for assembly.
- Premium caster is made of highly durable, non-corrosive plastic with a 5" (12,7 cm) swivel, non-marking thermoplastic rubber wheel. Total locking brake locks both swivel motion and the wheel.
- Optional donut bumper offers added protection during transport and when maneuvering mobile units into place against walls or alongside other units for storage.
- Smooth polypropylene shelf plates contain Camguard, an antimicrobial technology that inhibits the growth of mold, fungus and bacteria that may cause odors, stains and product degradation.
- Uniquely engineered Post Connectors offer exceptional cross stabilization. Weight bearing is uncompromised.
- Posts and traverses wipe clean. Traverses and shelf plates remove easily for cleaning.
- Shelf traverses can be removed and adjusted at 4" (10,2 cm) increments.
- Requires some assembly with minimal parts. Use a rubber mallet only.
- Lifetime warranty against rust and corrosion (posts, traverses and shelf plates).
- Available in 1 color – Speckled Gray (480).

Item No. _____

Quantity _____

AIA File / Spec No. _____

Job _____




Mobile Starter Unit with Vented Shelves



Mobile Starter Unit with Fencing

4 Shelf Unit Weight Bearing Chart

Mobile Unit

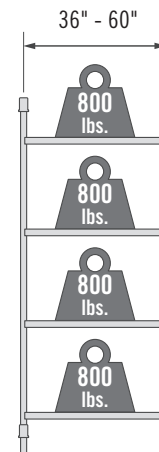

750 lbs.*
Maximum
Unit Capacity

* Due to the weight bearing capacity of casters, maximum weight load on an entire Mobile Unit is 750 lbs.

Approvals



Post Connectors, Corner Connectors, Seismic Foot, Wall Fastener, Identification Tags, Security Cages, Tray Slide Rack, Shelf Rails, Divider Bars, High Density Track and Extension Kits are not NSF Listed.



Information and specifications are subject to change without notice. Please confirm at time of order.

© Cambro Manufacturing Company 5801 Skylab Road, Huntington Beach, California 92647-2056, U.S.A.

Telephone 714 848 1555 Toll Free 800 854 7631 Customer Service 800 833 3003 Email: customerservice@cambro.com

Printed in USA. REV. 08/16

Camshelving® Premium Series

Mobile Starter Units 4 or 5 Vented Shelves


Item No. _____

Quantity _____


AIA File / Spec No. _____

Job _____

V4 4-Shelf Vented Mobile Units



V5 5-Shelf Vented Mobile Units



67"
HEIGHT

18"
DEPTH

21"
DEPTH

24"
DEPTH

CODE	DIMENSIONS D x L x H
CPMU183667V4	18" x 36" x 67"
CPMU184267V4	18" x 42" x 67"
CPMU184867V4	18" x 48" x 67"
CPMU213667V4	21" x 36" x 67"
CPMU214267V4	21" x 42" x 67"
CPMU214867V4	21" x 48" x 67"
CPMU243667V4	24" x 36" x 67"
CPMU244267V4	24" x 42" x 67"
CPMU244867V4	24" x 48" x 67"

18"
DEPTH

21"
DEPTH

24"
DEPTH

CODE	DIMENSIONS D x L x H
CPMU183667V5	18" x 36" x 67"
CPMU184267V5	18" x 42" x 67"
CPMU184867V5	18" x 48" x 67"
CPMU213667V5	21" x 36" x 67"
CPMU214267V5	21" x 42" x 67"
CPMU214867V5	21" x 48" x 67"
CPMU243667V5	24" x 36" x 67"
CPMU244267V5	24" x 42" x 67"
CPMU244867V5	24" x 48" x 67"

75"
HEIGHT

18"
DEPTH

21"
DEPTH

24"
DEPTH

CODE	DIMENSIONS D x L x H
CPMU183675V4	18" x 36" x 75"
CPMU184275V4	18" x 42" x 75"
CPMU184875V4	18" x 48" x 75"
CPMU213675V4	21" x 36" x 75"
CPMU214275V4	21" x 42" x 75"
CPMU214875V4	21" x 48" x 75"
CPMU243675V4	24" x 36" x 75"
CPMU244275V4	24" x 42" x 75"
CPMU244875V4	24" x 48" x 75"

18"
DEPTH

21"
DEPTH

24"
DEPTH

CODE	DIMENSIONS D x L x H
CPMU183675V5	18" x 36" x 75"
CPMU184275V5	18" x 42" x 75"
CPMU184875V5	18" x 48" x 75"
CPMU213675V5	21" x 36" x 75"
CPMU214275V5	21" x 42" x 75"
CPMU214875V5	21" x 48" x 75"
CPMU243675V5	24" x 36" x 75"
CPMU244275V5	24" x 42" x 75"
CPMU244875V5	24" x 48" x 75"

Color: Speckled Gray (480).

Color: Speckled Gray (480).

Optional Accessories

- Shelf Identification Tags
- Shelf Divider Panel
- Shelf Divider Bars (Straight or Angled)
- Shelf Rails (Single or Double)
- Tray Sliding Rack
- Single Shelf Security Cage
- Full Wrap Security Cage
- Shelf Traverses (Single or Double)
- Drying and Storage Cradles

Architect Specs

Posts and Traverses: Internal steel core, reinforced polypropylene exterior.
 Post Connectors: Reinforced polypropylene.
 Shelf Plates: Reinforced polypropylene with Camguard™ antimicrobial.
 Caster: Non-corrosive plastic body and brake with non-marking thermoplastic rubber wheel.

Approvals



Post Connectors, Corner Connectors, Seismic Foot, Wall Fastener, Identification Tags, Security Cages, Tray Slide Rack, Shelf Rails, Divider Bars, High Density Track and Extension Kits are not NSF Listed.

CAMBRO
TRUSTED FOR GENERATIONS™
www.cambro.com

Information and specifications are subject to change without notice. Please confirm at time of order.
 © Cambro Manufacturing Company 5801 Skylab Road, Huntington Beach, California 92647-2056, U.S.A.
 Telephone 714 848 1555 Toll Free 800 854 7631 Customer Service 800 833 3003 Email: customerservice@cambro.com
 Printed in USA. REV. 08/16

PS8

D081607