



Job:                   Item No.:

Notes:

Model Number:  PH125       PH128  
 PH129

## Heated Transport Carts

## SPECIFICATIONS



PH128

### DESCRIPTION

PH Series Heated Food Transport Cabinets are designed to hold and transport cooked food warm and ready for serving. They are constructed of sanitary stainless steel and feature a top-mounted heating system with dial controls and blower heat for even air flow throughout the cabinet. Transport features include welded, turned-in seam construction, insulated top, sides and bottom, recessed door, and heavy-duty casters.

### SHORT FORM SPECIFICATIONS

Heated food transport cart, electric, insulated, welded, turned-in seam stainless steel construction with recessed door and flush-mounted transport latch. Top-mounted, convection heater. Removable stainless steel tray racks with fixed channel tray slides on 2.75" centers for 12"x20"x2.5" steam table pans. Polyurethane casters set in wheel-ahead caster pattern. 120V, 60Hz, 1Ph, 1000 watts, 8.3A, six-foot 3 wire rubber cord with 3-prong grounding plug. NEMA 5-15P.

### FEATURES

- Top mounted, 1000 watt, convection heating system
- Dial thermometer with remote sensing bulb
- Capable of heating to 200°F (93°C); pre-heat to 160°F (71°C) in approximately 25 minutes
- All welded, turned-in seam, stainless steel construction
- 14 ga. stainless steel full depth bolsters; 1"x1" perimeter channel supports
- Flush mounted, double panel door with 1" thick high-density fiberglass insulation, gasketless design
- Welded-on, stainless steel butt hinges with 3/8" pin
- Flush mounted sliding latch
- All-swivel rubber casters; two fitted with brakes
- Removable tray racks with fixed tray slides on 2.75" centers
- Accommodates 12"x20"x2.5" steam table pans

### OPTIONS AND ACCESSORIES

- Menu card holder
- Rack hold down device
- Heater hold down device
- Tamper-resistant fasteners
- Transport latch with padlock hasp
- Alternate electrical configuration
- Alternate caster sizes and types
- 4" legs in lieu of casters
- Wrap-around bumper

### CERTIFICATIONS



### WARRANTY

One-year warranty for parts and labor.



**CARTER-HOFFMANN**  
 1551 McCormick Avenue, Mundelein, IL 60060  
 847.362.5500 • 800.323.9793  
 www.carter-hoffmann.com

Follow us



Form  
 PH129 Series\_0821






Job:                   Item No.:  
 Notes:  
 Model Number:  PH125       PH128  
                           PH129

## Heated Transport Carts

## SPECIFICATIONS

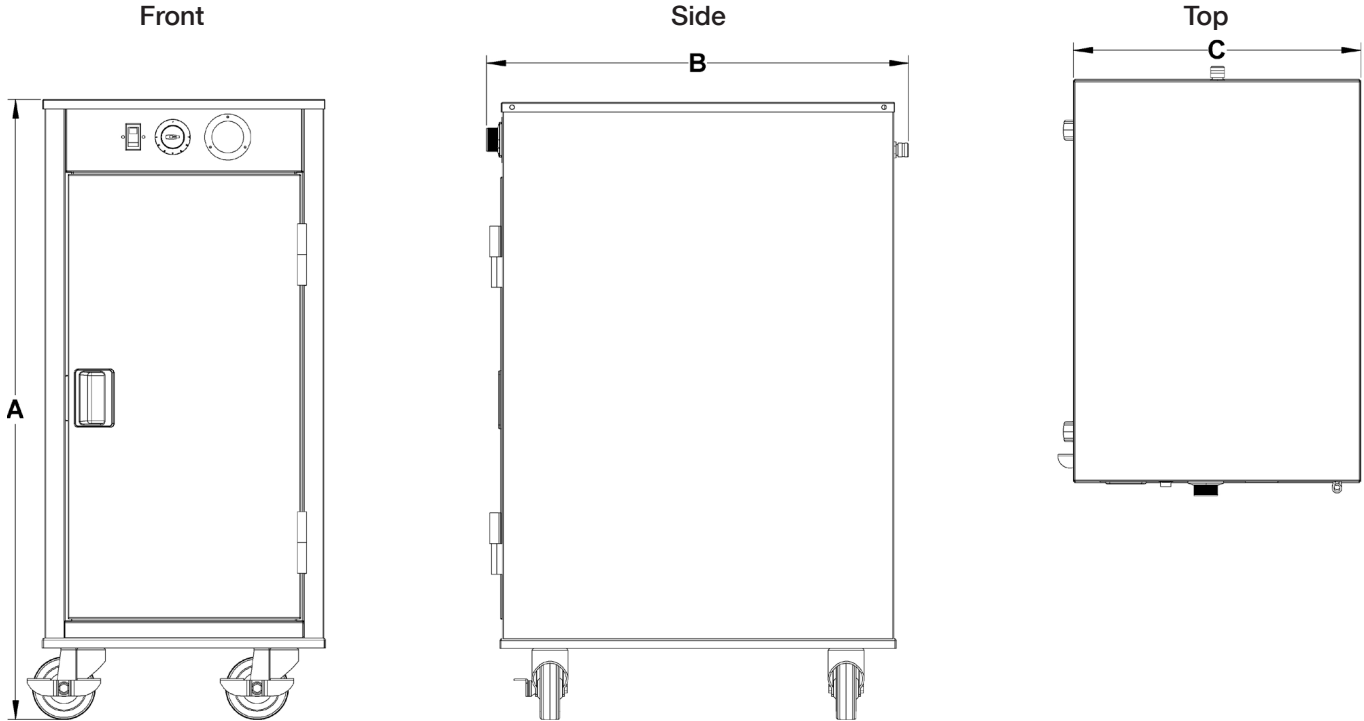

### CLEARANCES

A clearance of at least 2" from any wall or combustible material. A clearance of least 36" at the front of the cabinet is required to open the door. Cabinet must be placed on a solid level floor.

### ELECTRICAL DATA

Single electrical connection.  
 120 Volts, 1000 Watts, 8.3 Amps, 60Hz, single phase.  
 Six-foot three wire rubber cord with 3-prong grounding plug. NEMA 5-15P



Model Number	Pan Capacity*	Inside Working Height		Height [A]		Depth [B]		Width [C]		Caster Diameter		Shipping weight	
	12"x20"x2.5"	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg
PH125	5	20 <sup>1/2</sup>	521	28 <sup>1/2</sup>	724	25 <sup>1/8</sup>	638	17 <sup>7/8</sup>	454	3	76	110	50
PH128	8	23 <sup>5/8</sup>	600	37 <sup>3/4</sup>	946	25 <sup>1/8</sup>	638	17 <sup>7/8</sup>	454	4	102	128	58
PH129	9	26	660	40 <sup>1/2</sup>	1029	25 <sup>1/8</sup>	638	17 <sup>7/8</sup>	454	4	102	134	61

\*Pan spacing at 2.75" (89mm).

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Carter-Hoffmann exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using these specifications. By using the information provided, the user assumes all risks in connection with such use.