



Job: Item No.:
 Notes:
 Model Number: PH188 PH1820
 PH1840

Heated Correctional Transport Cart

SPECIFICATIONS



PH1820

DESCRIPTION

PH Series Heated Correctional Transport Cabinets are designed to hold and transport cooked food warm and ready for serving. They are constructed of sanitary, insulated, turned-in seam stainless steel and have heavy-duty correctional features for rigorous transport applications. Features include top-mounted lift-off heating system with dial controls and blower heat for even air flow throughout the cabinet, recessed door, prison grade transport latch, stainless steel handles, tamper-resistant correctional fasteners, heater and rack hold down devices, wrap-around bumper, and wheel-ahead caster pattern.

SHORT FORM SPECIFICATIONS

Heated food transport cart, electric, insulated, welded, turned-in seam stainless steel construction with recessed door, stainless steel push handles, tamper-resistant fasteners, protective covers for heater controls, flush-mounted door latch and transport latch. Top-mounted, convection heater. Stainless steel tray racks with universal adjustable tray slides on 1.75" centers. Standard 3.5" spacing for 18"x26" and 12"x20" pans. Non-marking gray vinyl wrap-around bumper. Polyurethane casters set in wheel-ahead caster pattern. 120V, 60Hz, 1Ph, 1500 watts, 12.5A, ten-foot 3 prong 3 wire rubber cord with 3-prong grounding plug. NEMA 5-15P.

FEATURES

- Top mounted, removable heating system with hold down device
- Full range thermostat control knob with security guard
- On/off toggle switch with security guard
- Dial thermometer with remote sensing bulb and protective cover
- Maximum temperature: 200°F (93°C); pre-heat to 160°F (71°C) in approx. 25 minutes
- All welded, turned-in seam, double-wall, stainless steel construction
- Tamper-resistant fasteners
- High density 1" thick fiberglass insulation in all sides and door
- Stainless steel caster bolsters; 1"x1" perimeter tube supports welded to bolsters
- Heavy-duty, stainless steel push handles welded to sides; reinforced back-up plates
- Recessed, double panel door
- Stainless steel butt hinges with 3/8" dia. pins; welded to cabinet and door
- Flush mounted sliding latch with finger grip
- Lockable transport latch
- High temperature silicone gasket mounted cabinet
- All-swivel, bolted on, polyurethane casters; two fitted with brakes
- Offset wheel-ahead caster pattern
- Non-marking gray vinyl bumper set in heavy-duty extruded aluminum frame
- Removable tray racks with adjustable tray slides
 - o 1.75" centers; 3.5" standard spacing
 - o Secured in place with hold down device
- Accommodates 18"x26" sheet pans, 12"x20" steam table pans

OPTIONS AND ACCESSORIES

- Menu card holder
- Locking paddle-style door latch
- Alternate electrical configuration
- Alternate caster sizes and types

CERTIFICATIONS



WARRANTY

One-year warranty for parts and labor.



CARTER-HOFFMANN
 1551 McCormick Avenue, Mundelein, IL 60060
 847.362.5500 • 800.323.9793
 www.carter-hoffmann.com

Follow us



Form
 PHCOR Series_082






Job: Item No.:
 Notes:
 Model Number: PH188 PH1820
 PH1840

Heated Correctional Transport Cart

SPECIFICATIONS

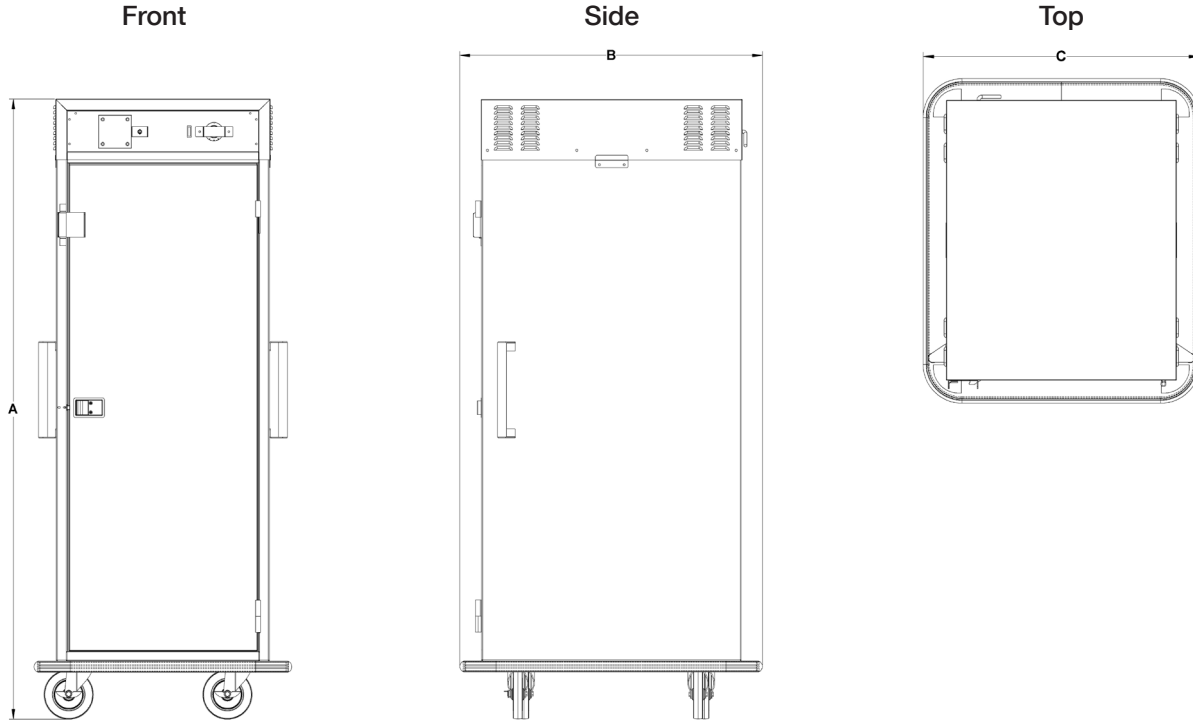

CLEARANCES

A clearance of at least 2" from any wall or combustible material. A clearance of least 36" at the front of the cabinet is required to open the door. Cabinet must be placed on a solid level floor.

ELECTRICAL DATA

Single electrical connection.
 120 Volts, 1500 Watts, 12.5 Amps, 60Hz, single phase.
 Ten foot three wire rubber cord with 3-prong grounding plug. NEMA 5-15.



Model Number	Pan Capacity*		Inside Working Height		Height [A]		Depth [B]		Width [C]		Caster Diameter		Shipping weight	
	18"x26"	12"x20"	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kg
PH188	6	12	23 ^{1/4}	591	40 ^{1/4}	1022	38	965	31 ^{1/2}	800	5	127	335	152
PH1820	12	24	45 ^{3/4}	1162	62 ^{3/4}	1594	38	965	31 ^{1/2}	800	6	152	440	200
PH1840	15	30	57 ^{1/2}	1461	75 ^{7/8}	1927	38	965	31 ^{1/2}	800	6	152	500	227

*Pan spacing at 3.5" (89mm). Tray slides adjustable at 1.75" increments.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Carter-Hoffmann exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using these specifications. By using the information provided, the user assumes all risks in connection with such use.