




VENTLESS HOOD FOR VGG-8 ROTISSERIE - REPLACEABLE FILTERS

Model VGH-8

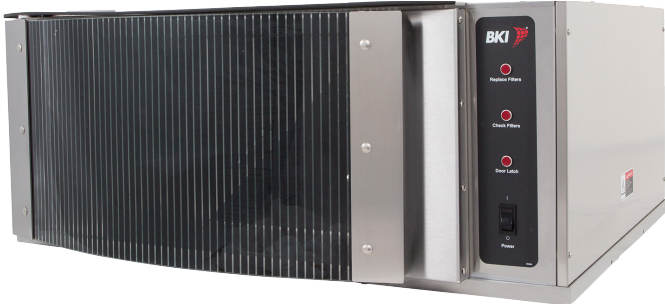

Self-contained and free of expensive ductwork, the BKI® VGH- 8 ventless hood system has an advanced two-stage filtration process that removes virtually all grease-laden air from the VGG series rotisserie ovens. The VGH-8 ventless hood can be paired with our VGG-8 or VGG-16 rotisserie ovens.

This unit meets the current Environmental Protection Agency (EPA) 202 testing standards. A forced maintenance system utilizes signal lights on the unit to alert the operator to check filter placement, replace dirty filters, and latch the hood doors. To avoid unsafe conditions, the VGG oven will shut off automatically if a hood door is opened, a filter is removed, or the power is turned off.

Filters are available in fiberglass or high carbon for the ultimate filtration of grease particles.

Assembled in USA, the VGH-8 is constructed to stand up to heavy use and provide a long service life.



FEATURES AT A GLANCE

- Two-stage filtration keeps grease-laden particles from returning to the air
- Signal light alerts operator to replace dirty filters, check filter placement, and latch door
- Safety shut-off if hood door/ filter is ajar or hood power is cut off




2-STAGE FILTRATION

Our patented 2-stage filtration eliminates virtually all airborne grease particles.



ELECTRIC OPERATION

Energy efficiency and easy installation are a perfect pairing for your food service operation.

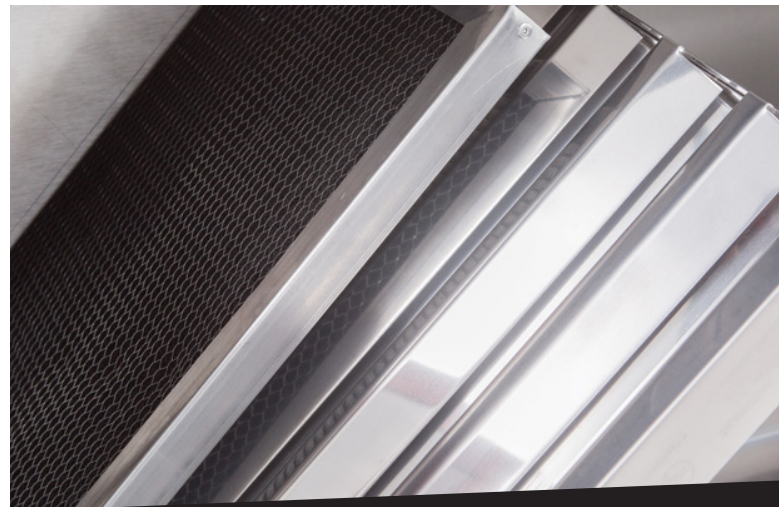


www.bkideas.com

42 Allen Martin Drive, Essex Junction, VT 05452 • Phone: (802) 658-6600 • Fax: (802) 864-0183


BK1283 Rev A (1/21)

EQUIPMENT DIMENSIONS

DIMENSIONS ARE IN INCHES [MM]

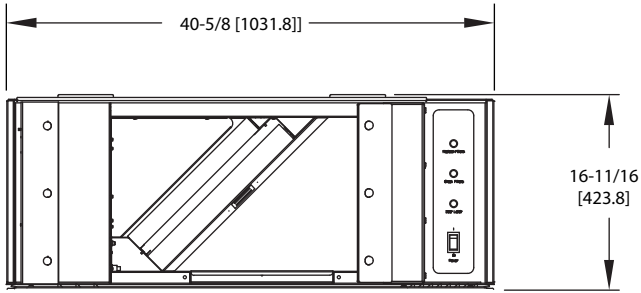

FRONT VIEW

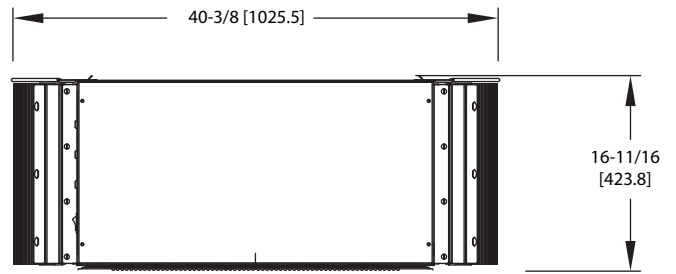

SIDE VIEW

MECHANICAL SPECIFICATIONS

Dimensions	Uncrated
Height	16.75" (425 mm)
Width	40.62" (1032 mm)
Depth	40.37" (1026 mm)
Floor space	10.6 sq ft (.98 sq m)
Weight	180 lb (82 kg)

ELECTRICAL OPTIONS


Volts	Amps*	Phase
208-240	1	1

* Must be added to the VGG (rotisserie) rated amps to correctly size full load amperage of combined unit.

MOUNTING OPTIONS

- Can be mounted to VGG-8 rotisserie oven at the factory or in the field
- Must be mounted to VGG-16 oven in the field
- May be retrofitted in the field at a later date

PARAMETER	VALUE
Noise Level	58 decibels



Visit www.bkideas.com to view all accessories available with this model.