


Project _____

Item Number _____

Quantity _____

Round Rotating Dome Oven

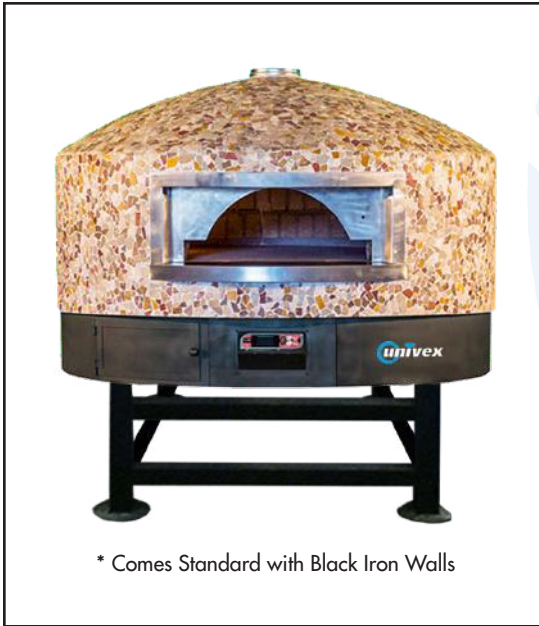

* Comes Standard with Black Iron Walls

Rotating Dome Pizza Oven

Models:

- Rotante47: Rotating Dome Pizza Oven
- Rotante59: Rotating Dome Pizza Oven

Pizza Oven

Features:

- 47" Cooking chamber with 39.4" cooking Surface
- 59" Cooking chamber with 55" cooking surface
- Handmade firebrick pizza oven
- Rotating cooking floor
- Round internal cooking chamber
- Insulated and ready to be connected to smoke stack
- Very well insulated, outside is cool to touch at highest temperature
- Full Electronic Control

Burner Specifications:

- 3/4" (1.9cm) NPT gas connection
- Natural Gas or Propane
- Natural Gas- 4.0" WC
- Propane- 10.0" WC

Venting: Depends on local state code. Recommend a dedicated natural draft flue. If exhaust fan is required by code, it needs to be no more than 200-300 CFM.

Univex Corporation

Standard Accessories:

- Iron stand
- Thermometer
- Remote Control
- Iron door
- Stack exhaust internal diameter 7 7/8" (20cm)

Optional Accessories:

- Black or customizable exterior
 - Marble
 - Mosaic

Warranty:

- One year, on-site parts and labor



Rotating Dome Pizza Oven

Gas

For installation, forklift must be able to lift 5,000 lbs and have at least 72" forks.

Vent Pipe: 7.87"(200mm)

Drawing	Details	
	Rotante Dome47RT	Rotante Dome59RT
	Height H 185cm 72.83"	Height H 185cm 72.83"
	Length L 165cm 65"	Length L 195cm 76.77"
	External diameter 165cm 65"	External diameter 195cm 76.77"
Drawing	Details	
	Rotante Dome47FT	Rotante Dome59FT
	Height H 185cm 72.83"	Height H 185cm 72.83"
	Length L 205cm 80.7"	Length L 235cm 92.5"
	Depth D 165cm 65"	Depth D 195cm 76.77"

*The stand is 28" high

For the Dome59RT, if shipped fully assembled, there must be a minimum of 80" clearance on any doorway, hallway with no obstructions to its final location.

For the Dome47RT, if shipped fully assembled, there must be a minimum of 70" clearance on any doorway, hallway with no obstructions to its final location.

- Minimum clearance away from combustibles from all sides: 6" (15.2cm)
- Minimum clearance away from combustibles from top: 16" (40.6cm)
- Please note that standard dry-wall or sheet rock is considered a combustible
- Built on a non combustible floor with at least 32" (81.3cm) surrounding the oven and at least 40" (101.6cm) in front of the oven
- Minimum clearance under oven: 31 inches² (200cm²)
- Leave enough clearance for someone to service the oven

Oven Weight	
Rotante47	4400lbs. (1995Kg)
Rotante59	5300lbs. (2404Kg)

Number of Pizzas	
Model	12" Pizzas
Rotante47	6
Rotante59	14

BTU: Rotante47 - 92,500 BTU
Rotante59 - 97,500 BTU

Electrical Information (60Hz)				
	Voltage	Phase	Hz	Amps
Standard Voltage	208-240	3	60	19

*Plus a dedicated neutral is required.