



Model: **GWH-24** Item #: _____ Date: _____
 Project: _____ Qty: _____ Approved By: _____

Heat Recovery Glasswasher

Glasswashing



GWH-24 shown
 Rack stand included

SPECIFICATIONS

Capacity	*Racks (per hr)	25
Motor Horsepower	Wash	1 HP
Water Consumption	US Gal Max Use (per hr)	15.6 gallons
	US Gal per rack	0.65 gallons
Temperatures	Wash (minimum)	150°F
	Rinse (minimum)	180°F
Heating	Tank Heat, electric (kW)	2 kW
	Electric booster	5 kW
Time Cycle	Wash	45/120/197 seconds
	Rinse	13 seconds
	Drain/fill	62 seconds
Weight		198 lbs

STANDARD FEATURES



- High Temperature Glass Washer
- 25" Front to Back depth, 37-1/4" Height
- Heat recovery using cold water feed only, up to 50% more efficient. Reduces operation costs
- Improved and quicker drying where condensation is removed using RAPID-DRY
- Soft Start cycle protects glasses and mugs from chipping and breaking
- Deep drawn, type 316 stainless steel tank
- 12-1/8" door opening, 22-1/2" loading height
- Multi-cycle; 3 cycle time options for enhanced cleaning
- Delime and Auto-clean features - flush tank interior and easy deliming of wash cavity
- Electric tank heater (2 kW)
- Flexible fill and drain lines
- Digital temperature displays and microcomputer controls
- Easy installation standard pumped drain
- Liquid detergent and rinse-aid dispensing pumps complete with prime switches
- Two 20" x 20" racks, one peg, one flat (25 racks per hour)
- Free 1 year warranty if glass washing dump sink is purchased and placed next to glasswasher in bar line-up

UTILITIES

- Electrical** 208-240/60/1; 3 wire plus ground
 208-240/60/3; 4 wire plus ground
 Field convertible to accept 3 phase power
- Water Connection** 1/2 supply; 55-85°F cold water; 25 PSI min.
 Machine equipped with 3/4" hose connector
- Drain Connection** 6 ft. long, 5/8" I.D. flexible drain hose.
 Max drain flow: 15 US gpm. Max drain height 3ft.

Electrical Specs.	Rated Amps	Minimum Supply Ckt. Conductor Ampacity	Maximum Overcurrent Protective Device
208/60/1	32	40	40
240/60/1	36	40	40
208/60/3	22	30	30
240/60/3	24	30	30

Note: Electrical supply service must be a 3 or 4 wire plus ground for connection as shown

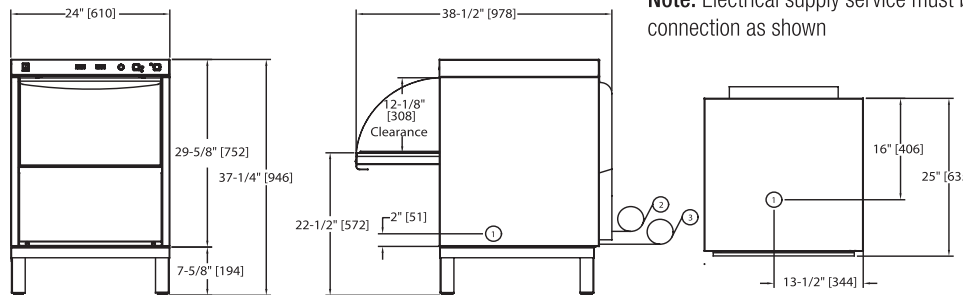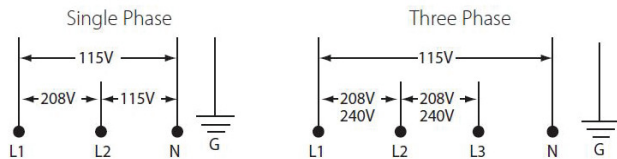

WARNING: Plumbing and electrical connections should be made by qualified personnel who will observe all applicable plumbing, sanitary and safety codes.