

# COFFEE GUARDIAN RANGE



## ST-2 MINI

### COFFEE GUARDIAN ST-2 mini COFFEE GROUNDS REMOVAL EQUIPMENT

#### COFFEE GUARDIAN ST-2 mini

**Stainless Steel**

**Installed under barista / coffee machine**

**Prevents blockages**

**Filters coffee grounds**

**Easy to install**

**Compact**



### STAINLESS STEEL CONSTRUCTION DURABLE - RELIABLE - BUILT TO LAST

**No More Pipe Blockages**


**Keep Your Drains Clear From  
Damaging Coffee Waste!**

From The Grease Guardian  
Equipment Line



# COFFEE GUARDIAN

## ST-2 MINI

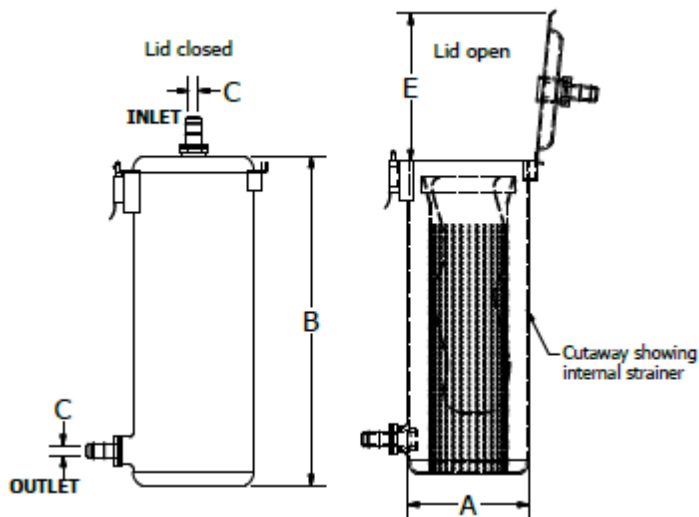

### DIMENSIONS

|                             |      |
|-----------------------------|------|
| A - Diameter                | 5.0" |
| B - Height                  | 9.0" |
| C - Inlet / Outlet Diameter | 3/4" |
| E - Open Lid Space          | 6.0" |

### ST2 mini coffee machine waste filter

The ST2 mini is a filter for industrial coffee machines, specifically designed to treat the waste flow of back-wash before going through the drain. Coffee grounds are strained through an ultra fine fabric mesh filter.

The ST2 mini is easy to fit and comes with pipe fittings and wall brackets for easy installation. The ultra fine fabric mesh filter can be used to strain the grounds.

The ST2 mini is particular suitable in confined spaces .

## Specification

### ☐ Coffee Guardian - Part # ST-2 mini

Coffee Guardian ST-2 mini, coffee waste filter. 16 gauge fully welded 304 stainless steel tank and stainless steel cylinder, ultra fine mesh filter and robust stainless steel clamps, directional inlet and outlet flow connections, with easy fit 3/4" pipe couplings, concealed mounting bracket connections and 1.8+ pounds solids retention capacity. The ST-2 mini is supplied with mounting hardware and supplied with ultra fine mesh filters. The ST-2 mini is suitable for wall or shelf mounting arrangements. 3 year warranty is standard.

### ☐ Replacement Filter Socks - Part # CGF5

### KEY INSTALLATION NOTES

- The ST2 mini Coffee Guardian should be positioned in the cabinet beneath the coffee machine using the brackets provided.
- Ensure clearance is provided for opening the hinged lid as indicated in the diagram above.
- Ensure that the ST2 mini is positioned close to the front of the cabinet for ease of operation and inspection.
- Connect the flexible waste hose on the coffee machine to the ST2 mini inlet and connect the waste outlet pipe to the floor waste point.
- Ensure that a gravity fall in line with local plumbing codes, is provided between the ST mini and the floor waste point
- The Grease Guardian ST2 system is supplied with 3/4" connections.



**Grease Guardian**  
127, Cliffside Drive  
Yonkers  
NY 10710

800-677-7861

info@greaseguardian.com

www.greaseguardianusa.com