

DESIGNER LINE ROLL-IN WARMER

Model: DL2WI

Designer Line

2-Section Roll-In Warmer with 66¼" Cart Capacity

DL2WI - Stainless steel front, aluminum end panels and interior
DL2WI-SA - Stainless steel exterior, aluminum interior
DL2WI-SS - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Roll-thru (consult factory)
Chrome or stainless steel shelves	Correctional Facility Options
Rehinging of door (consult factory)	<ul style="list-style-type: none"> One way security screws
Custom laminates	<ul style="list-style-type: none"> Locking hasp (lock not included)
Half doors	<ul style="list-style-type: none"> Stainless steel mesh cover
Special electrical req. (consult factory)	<ul style="list-style-type: none"> Coverless hinges
Extra-high (consult factory)	

Consult factory for other model configurations, options and accessories.

Continental[®]
Refrigerator

Toll-Free: 800-523-7138
 Phone: 215-244-1400
 Fax: 215-244-9579

539 Dunksferry Road
 Bensalem, PA 19020
www.continentalrefrigerator.com

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

HEATING SYSTEM

Self contained, performance rated "plug" heating system
 90°F to 180°F temperature range
 Unique air flow distribution ducts

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation
 Smooth, polished chrome workflow door handles
 Cam action, lift off hinges
 Magnetic snap in Santoprene™ door gaskets
 Cylinder lock in each door
 Self-closing doors
 66 ½" high door opening (66 ¼"H rack capacity*)

MODEL FEATURES

Electronic controller with digital display & hi-low alarm
 Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at job site
 Removable stainless steel rack guides
 Removable stainless steel ramps
 Reinforced stainless steel floor

* Racks not supplied

APPROVAL:

Model Specifications

DIMENSIONAL DATA

Net Capacity (cubic feet)	64 (1812 cu l)
Width, Overall (inches)	68 1/2 (1740 mm)
Depth, Overall (inches) (including handles)	35 3/8 (899 mm)
Depth (inches) (less doors)	32 (813 mm)
Depth (inches) (doors open 90°)	65 (1651 mm)
Clear Door Width (inches)	27 3/8 (695 mm)
Clear Door Height (inches)	66 1/2 (1676 mm)
Height, Overall (inches)	86 (2184 mm)
Number of Doors	2
Rack Capacity** (per section)	2

ELECTRICAL DATA



Voltage	208-230/60/1
Feed Wires (including ground)	3
Total Amps (International)	13.9 (13.9)
Total Wattage @ 208-230 volts	3000
10 ft. Cord/Plug (International)	No (No)

SHIPPING DATA

Height - Crated (inches)	90 (2286 mm)
Width - Crated (inches)	77 (1956 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	168 (4757 cu l)
Weight Std - Crated (pounds)	625 (283 kg)
Weight SS - Crated (pounds)	710 (322 kg)

** Maximum rack size including wheels - 27"W x 29"D x 66 1/4"H
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Model Plan Views

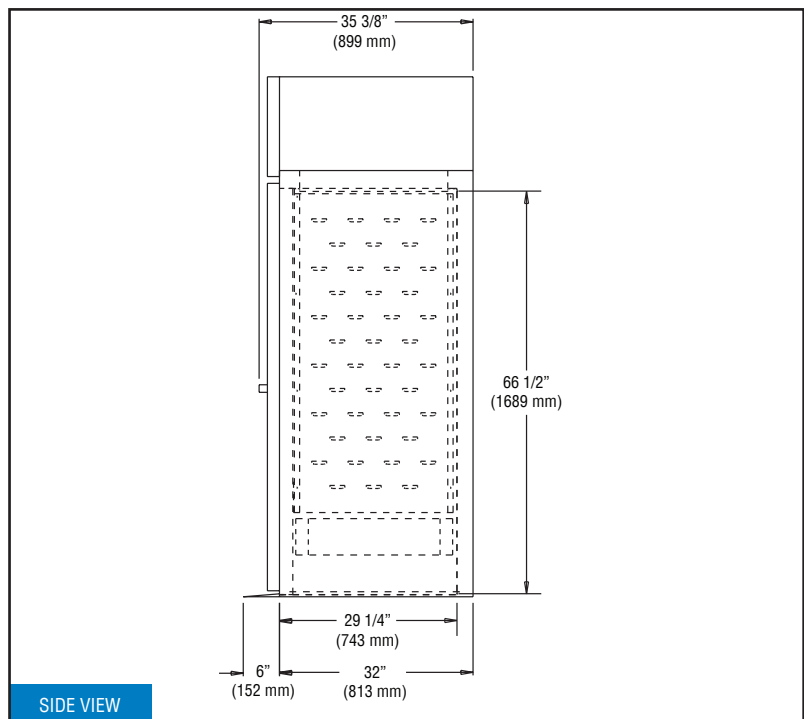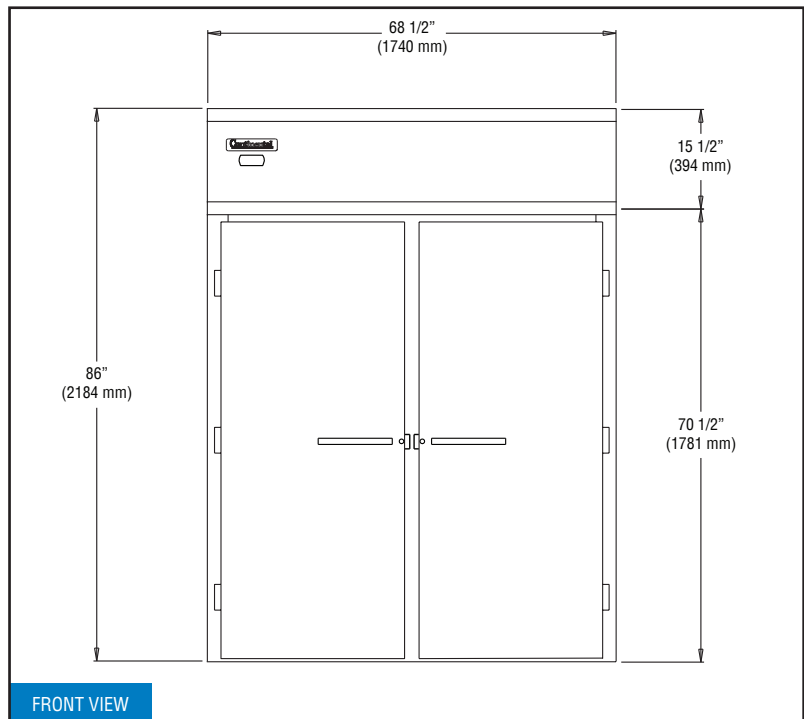

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.

