

DESIGNER LINE ROLL-IN REFRIGERATOR

Model: D1RIN-E

Natural Refrigerant R-290 Model

Designer Line

1-Section Extra-High Roll-In Refrigerator with 72" Cart Capacity



ENERGY STAR® Qualified Commercial Refrigerator

D1RIN-E - Stainless steel front, aluminum end panels and interior

D1RINSA-E - Stainless steel exterior, aluminum interior

D1RINSS-E - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

| | |
|-------------------------------------|--|
| Stainless steel case back | Special electrical req. (consult factory) |
| Epoxy coated steel shelves | Correctional Facility Options |
| Chrome or stainless steel shelves | <ul style="list-style-type: none"> One way security screws |
| Rehinging of door (consult factory) | <ul style="list-style-type: none"> Locking hasp (lock not included) |
| Custom laminates | <ul style="list-style-type: none"> Stainless steel mesh cover |
| Half doors | <ul style="list-style-type: none"> Coverless hinges |
| Roll-Thru (consult factory) | |

Consult factory for other model configurations, options and accessories.

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Self contained, performance rated "plug" refrigeration system

Natural, environmentally safe, high efficiency R-290 refrigerant¹

Refrigeration system is readily accessible on top of cabinet, separate from the "food zone"

Automatic, hot gas condensate evaporator

Expansion valve system

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handle

Cam action, lift off hinges

Magnetic snap in Santoprene™ door gasket

Cylinder lock in door

Self-closing door

72 1/2" high door opening (72"H rack capacity*)

MODEL FEATURES

Electronic controller with digital display & hi-low alarm

LED interior lighting

Top and side air distribution ducts

Off-cycle defrost

Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at job site

Removable stainless steel rack guides

Removable stainless steel ramp

Reinforced stainless steel floor

* Rack not supplied

IMPORTANT NOTE: ¹ R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

Model Specifications

DIMENSIONAL DATA

| | |
|---|------------------|
| Net Capacity (cubic feet) | 34 (963 cu l) |
| Width, Overall (inches) | 35 1/4 (895 mm) |
| Depth, Overall (inches) (including handle) | 35 3/8 (899 mm) |
| Depth (inches) (less door) | 32 (813 mm) |
| Depth (inches) (door open 90°) | 65 (1651 mm) |
| Clear Door Width (inches) | 27 3/8 (695 mm) |
| Clear Full Door Height (inches) | 72 1/2 (1842 mm) |
| Height, Overall (inches) | 92 (2337 mm) |
| Number of Doors | 1 |
| Rack Capacity** | 1 |

REFRIGERANT DATA

| | |
|-----------------------------|------|
| Condensing Unit Size (H.P.) | 1/3+ |
| Capacity (BTU per hour)* | 2560 |

ELECTRICAL DATA

| | |
|--|---------------------|
| Voltage (International) | 115/60/1 (220/50/1) |
| Feed Wires (including ground) | 3 |
| Total Amps (International) | 6.3 (4.1) |
| 10 ft. Cord/Plug [attached] (International) | Yes (No) |

SHIPPING DATA

| | |
|------------------------------|----------------|
| Height - Crated (inches) | 97 (2464 mm) |
| Width - Crated (inches) | 43 (1092 mm) |
| Depth - Crated (inches) | 42 (1067 mm) |
| Volume - Crated (cubic feet) | 98 (2489 cu l) |
| Weight Std - Crated (pounds) | 455 (206 kg) |
| Weight SS - Crated (pounds) | 580 (263 kg) |

* Rating @ +25°F evaporator, 90°F ambient



** Maximum rack size including wheels - 27"W x 29"D x 72"H

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug
(varies by country)

Model Plan Views

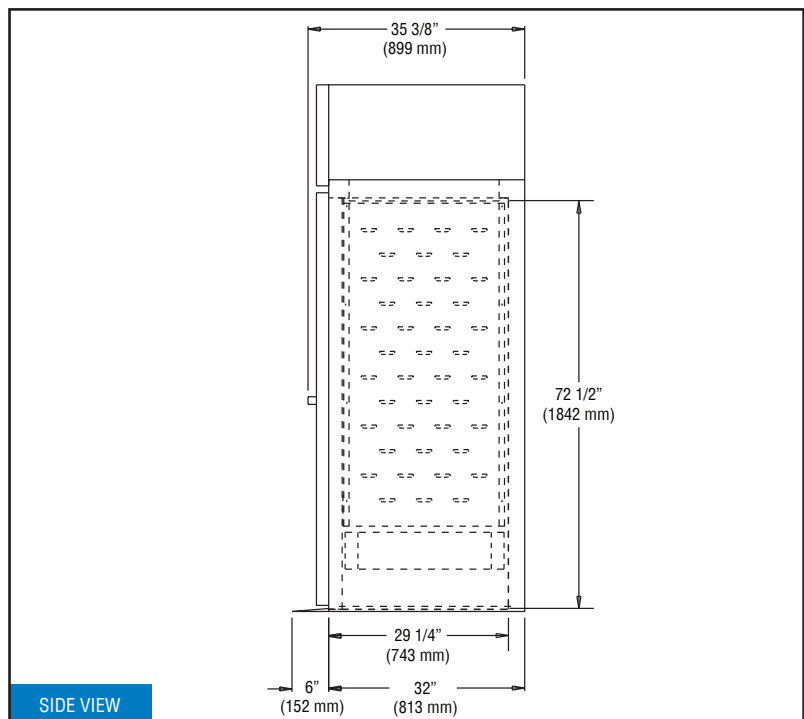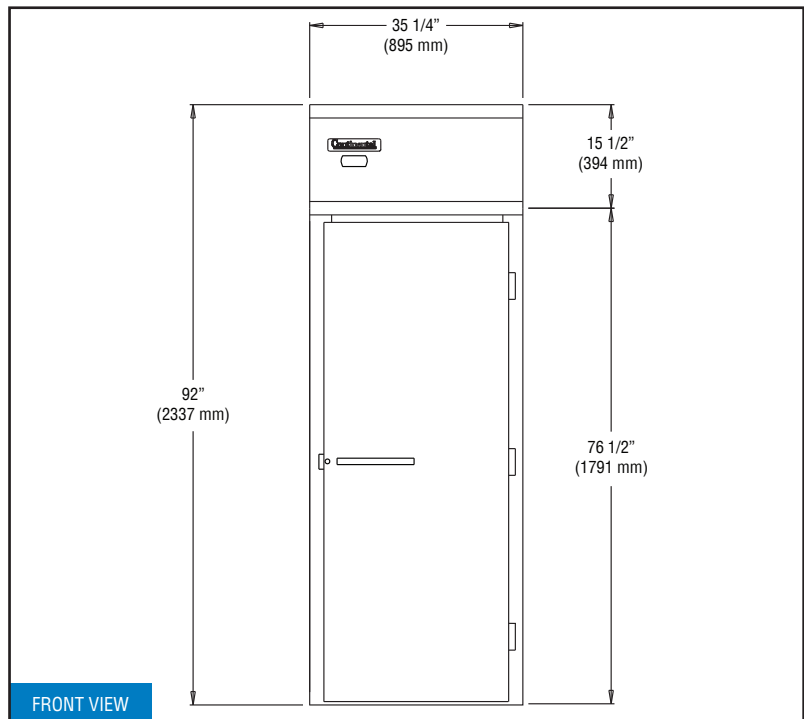

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.

