DESIGNER LINE DISPLAY REFRIGERATOR

Model: D1RNGDHD



Natural Refrigerant R-290 Model

1-Section Display Reach-In Refrigerator with Half Hinged Glass Doors

D1RNGDHD - Stainless steel front, aluminum end panels and interior D1RNSAGDHD - Stainless steel exterior, aluminum interior D1RNSSGDHD - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)	
Stainless steel case back	Wine rack
Additional epoxy coated steel shelves	Casters
Chrome or stainless steel shelves	Full door
Rehinging of door (consult factory)	Special electrical req. (consult factory)
Pan slide assemblies	Shallow depth (consult factory)
Solid door (consult factory)	Pass-thru (consult factory)

Consult factory for other model configurations, options and accessories.

Project Name:	
Model Specified:	
Location:	
Item No:	Quantity:
AIA #:	SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Self contained, performance rated "plug" refrigeration system Natural, environmentally safe, high efficiency R-290 refrigerant¹ Refrigeration system is readily accessible on top of cabinet, separate from the "food zone" Automatic, hot gas condensate evaporator Expansion valve system

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation
Triple-pane, tempered hinged glass doors
Chrome-plated handles
Cam action, lift-off hinges
Self-closing doors
Magnetic snap in door gaskets
Cylinder lock in each door
Heavy duty, epoxy coated steel shelves
Heavy-duty pilaster strips
Adjustable 6" stainless steel legs

MODEL FEATURES

LED interior lighting
Top and side air distribution ducts
Off-cycle defrost
Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at job site
Electronic controller with digital display & hi-low alarm

¹ R-290 refrigerant meets all federal and state regulatory requirements.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

21 (595 cu l)

26 (660 mm)

32 (813 mm)

35 ³/₈ (899 mm)

55 ½ (1410 mm)

19 3/8 (492 mm)

27 ¹/₂ (699 mm)

83 1/4 (2115 mm)

20.4 (1.9 sq m)

115/60/1 (220/50/1)

85 ½ (2172 mm)

31 5/8 (803 mm)

42 (1067 mm)

65 (1841 cu l)

325 (147 kg)

385 (175 kg)

Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579 539 Dunksferry Road

Bensalem, PA 19020 www.continentalrefrigerator.com

idly Designed and

2

4

11

1/4

3

Yes

(No)

5.5 (3.8)

1940

DIMENSIONAL DATA Net Capacity (cubic feet)

Width, Overall (inches)

Depth, Overall (inches)

Depth (inches) (less doors)

Clear Door Width (inches)

Height, Overall (inches)

Shelf Area (square feet)

REFRIGERANT DATA

ELECTRICAL DATA

(International)

SHIPPING DATA

Voltage (International)

Feed Wires (including ground)

Total Amps (International)

10 ft. Cord/Plug [attached]

Height - Crated (inches)

Condensing Unit Size (H.P.)

Capacity (BTU per hour)*

Tray Slide Capacity (per half section)

(including 6" legs)

Number of Doors


Number of Shelves


Depth (inches) (doors open 90°)

Clear Half Door Height (inches)


(including handles)

Model Plan Views

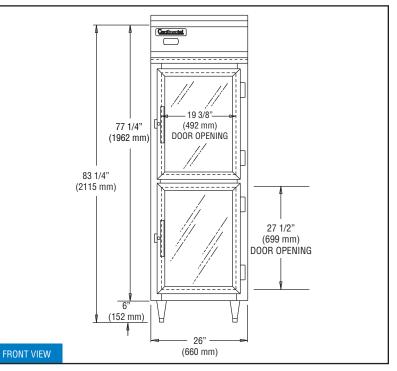

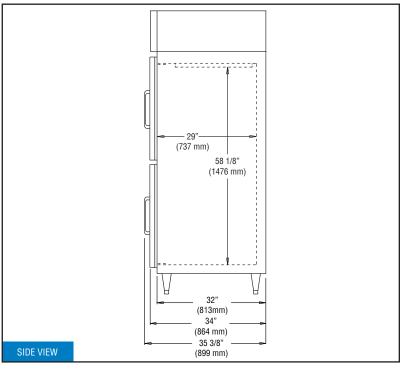

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.



Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



Due to our continued efforts in developing innovative products, specifications subject to change without notice.



Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc

tek ______