



# GAS CONNECTOR COMPLETE KIT



AS PER ANSI Z21.69/CSA 6.16

## Welded Construction

360° Heavy Duty welds on both ends increases durability compared to industry standard crimped ends.

## Corrugated Tubing

Stainless steel corrugated tubing built to be flexible for ease of installation.

## Radial Wrap


Heavy Duty stainless steel radial wrap prevents hose from stretching.

## PVC Protective Coating

PVC protective coating with antimicrobial agent for easy cleaning.

## Rotational Ends

360° rotational ends provide versatility and ease during installation.

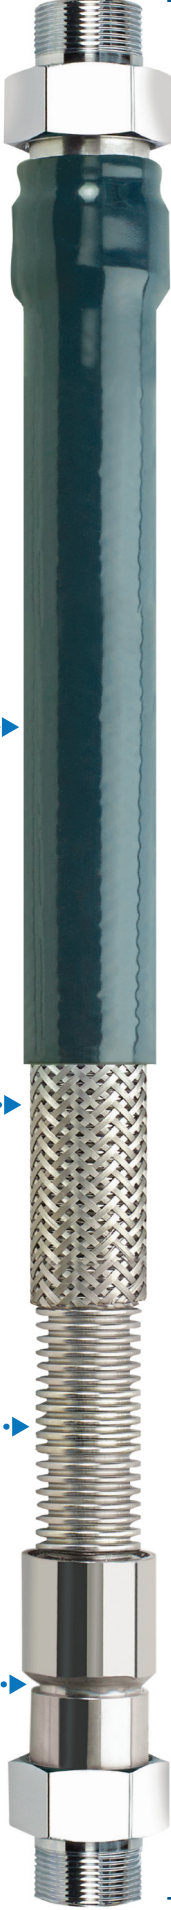

## True Length

As opposed to industry standard of shortening advertised length by 3-1/2"



## One-Handed Quick Disconnect

360° stainless steel ball bearings securely lock Quick Disconnect in place.



## Gas Valve

Ball valve is required by code to allow for manual shutoff within 5 ft. of appliance.



## 90° Elbows

Elbows allow for versatility in tight conditions during installation.



Includes mounting hardware.

## Restraining Kit

Comes pre-cut 12" shorter than overall length of hose to prevent hose from being pulled too far. Easily disconnects for cleaning and maintenance.

Available in any combination of interior size & lengths seen here:

Interior Sizes: 1/2" 3/4" 1" 1-1/4" Lengths: 24" 36" 48" 60" 72"

## OPTIONAL COMPONENTS



## Caster Positioning Chocks

Creates a home position for movable kitchen equipment. Stainless steel construction eliminates cracking commonly seen with plastic caster positioning sets. Mounting hardware included for easy installation. (2) chocks per set.



## SwivelKing™

Durable stainless steel construction with dual 360° rotation significantly reduces stress and extends life of hose.