

| | | | |
|--|--|----------------|-------------------|
|  REFRIGERATOR MANUFACTURER Turbo air more durable, efficient, beautiful | 4184 E. Conant St. Long Beach, CA 90808 Tel. 310-900-1000 Fax. 310-900-1077 www.turboairinc.com | Project: | |
| | | Model #: | |
| | | Item #: | |
| | | Available W/H: | Qty: |
| | | Approval: | |
| | | AIA #: | SIS #: |
| | | | CSI Section 11400 |

Roll-Through Solid Door Heated Cabinet Roll-Through PRO Series

Model : PRO-50H-RT

≡ FEATURES & BENEFITS ≡

- Digital temperature control & monitor system**
 - Keeps food products safe by maintaining constant temperatures
 - Alarm beeps when doors are not sealed
 - Early warning alarm program detects issues before malfunction occurs
 - Digital display allows for easy monitoring
 - Sensitive touch display
- Ducted fan air distribution system**
 Maintains temperature within the food zone
- On/Off switch**
 ON/OFF switch is located on control panel
- All stainless steel cabinet construction**
 The PRO series model boasts a stainless steel interior and a **22 gauge** stainless steel exterior (galvanized steel top, bottom). It guarantees the utmost in cleanliness and long product life. The PRO series model adds a touch of style to the most refined setting.
- High-density polyurethane insulation**
 The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.
- LED interior lighting**
- Full length stainless steel solid doors with locks**
- Self-closing doors with stay open feature at 120 degrees**
- Heated cabinet holds 140°F ~ 180°F for the best in food preservation**
- Lifetime guaranteed heavy duty hinges and handles**



| Model | Swing Door | CU./FT. | #of Rack Accepted | Wattage (W) | AMPS | Crated Weight (lbs.) | L x D* x H † (inches) |
|-------------------|------------|-------------|-------------------|-------------|-----------|----------------------|------------------------------|
| PRO-50H-RT | 2 | 81.8 | 2 | 3000 | 15 | 796 | 667/8 x 401/8 x 841/4 |


Ver.20230126 Printed in U.S.A.

* Depth does not include 1-1/4" for door handles. Depth does not include 6-7/8" for ramps.

Roll-Through Solid Door Heated Cabinet

Roll-Through
PRO Series

Model : PRO-50H-RT

| ELECTRICAL DATA | |
|--|--|
| Voltage | 208/115/60/1 |
| Plug Type |  NEMA L14-20P |
| Full Load Amperes | 15 |
| Wattage (W) | 3000 |
| Cord Length (ft.) | 8 |
| DIMENSIONAL DATA | |
| # of Doors | 2 |
| # of Racks Accepted (Size (L x D x H) (in)) | 2 (27 x 29 x 66) |
| Net Capacity (cu. ft.) | 81.8 |
| Ext. Length Overall (in.) | 66 ⁷ / ₈ (1700mm) |
| Ext. Depth Overall (in.) | 40 ¹ / ₈ (1020mm) |
| Ext. Height Overall (in.)* | 84 ¹ / ₄ (2140mm) |
| Int. Length Overall (in.) | 58 (1474mm) |
| Int. Depth Overall (in.) | 35 ³ / ₈ (900mm) |
| Int. Height Overall (in.) | 66 ⁷ / ₈ (1699mm) |
| Net Weight (lbs.) | 738 |
| Gross Weight (lbs.) | 796 |

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

* Depth does not include 2-1/2" for door handles. Depth does not include 6-7/8" for ramps.


■ WARRANTY : 3 Year Parts and Labor Warranty

■ STANDARD FEATURES


- Door locks
- Solid and sturdy grille design
- Heavy duty stainless steel ramp

PLAN VIEW

(unit : inch)

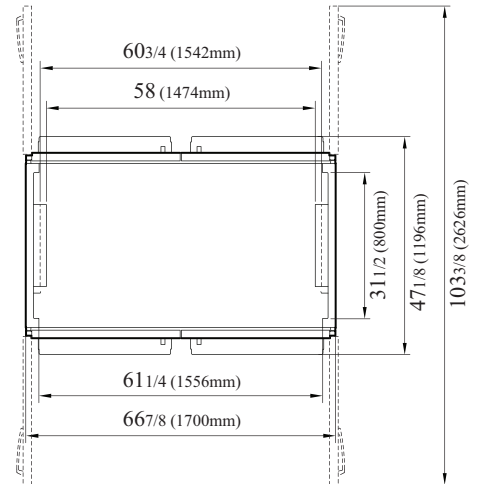

TOP VIEW

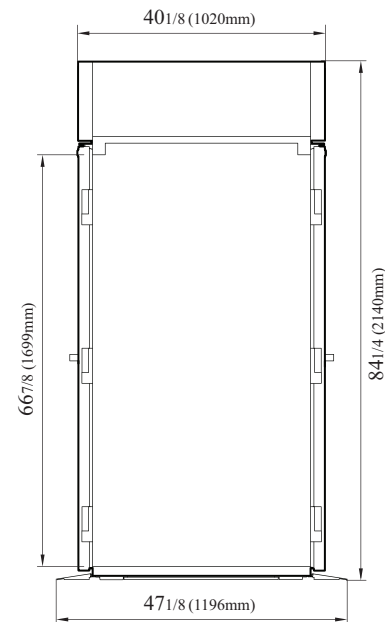

SIDE VIEW

Ver.20230126



- Turbo Air : 800-627-0032
- GK : 800-500-3519
- Warranty : 800-381-7770
- AC : 888-900-1002



Continued product development may necessitate specification changes without notice.