QUANTITY

ITEM NO

FlexFusion[™] Combi Oven Space\$aver[™] Plus



Chef'sTouch control: Just tap and swipe to run automated cooking and operating apps

Henny Penny FlexFusion combi ovens combine different cooking methods into one piece of equipment with the flexibility to cook nearly everything on your menu to perfection.

The FlexFusion Space\$aver Plus combi incorporates powerful yet highly energy-efficient boilerless steam generation into a compact tabletop unit less than 22 inches wide with racking for full-size steam table pans. Perfect for smaller operations with limited kitchen space. This system instantly adds or eliminates the precise amount of moisture needed to maintain desired cooking conditions.

What really sets FlexFusion apart is its ease of use. The Space\$aver Plus features Chef'sTouch, an intuitive control system with a durable 7-inch touch/swipe screen that makes cooking with FlexFusion as easy as using a smart phone! Just energy A

FSEN610 Electric FSEN610.608.01 Electric

tap the app for everything from cookand-hold to cleaning and troubleshooting.

FlexFusion FSEN610 earns the ENERGY STAR[®] mark for energy efficiency. WaveClean[™] self-cleaning system, multi-sensor core temperature probe and USB port are standard.

Removable tilt-resistant rails accept full-size steam table pans or half-size sheet pans and grids.

Popular FlexFusion built-in Apps:

- AutoChef—Tap/swipe to select cooking programs and features
- ChefsHelp—Intuitive training and instruction with graphics and video
- FamilyMix—Shows which items can be cooked together
- GreenInside—Displays energy and water use for each cooking program
- CombiDoctor—Runs system selfdiagnostics and displays results

- **Standard Features**
- Chef'sTouch™ Control System for Automatic or easy manual cooking
 - Durable 7-inch high resolution touch/swipe screen
 - Full-color display, video assist
 - Select from up to 350 cooking programs in AutoChef memory
 - Create and store custom cooking programs of up to 20 steps each Select and use apps for cooking, serving convenience, cleaning, diagnostics and more
 - Use ClimaSelect Plus to set and maintain humidity levels at 10% increments from 0% to 100% RH
 - Adjust individual settings before or during cooking
 - Multi-sensor food probe
 - Temperature in °F or °C

□ APPROVED

AUTHORIZED SIGNATURE

 Choose language for operations and service diagnostics

□ APPROVED AS NOTED

- Accepts full-size steam table pans on 5 or 6-level removable pan rack with tilt-resistant rails
- DynaSteam2 precision boilerless steam generation
- 5-speed auto-reverse fan for fast, even cooking throughout the cabinet
- Powerful high-efficiency motor uses up to 15% less energy
- Full perimeter door seal

□ RESUBMIT

DATE

- Triple-pane glass saves 28% more energy over ventilated door system
- Integrated LED lighting in window perimeter for improved viewing
- Earns the ENERGY STAR[®] mark for energy efficiency
- Improved WaveClean[®] self-cleaning system uses 36% less water

- Stainless steel interior cabinet with coved corners
- 1 mm stainless steel exterior
- USB port for convenient download of programs, diagnostic messages or HACCP data

Qptions, accessories*

- Two-in-one cleaning cartridges
- □ Stands and wall bracket
- □ Stacking kit
- □ Barcode scanner
- Left-hinged door
- Choose rail configuration:
- 🛛 5 rails
- OR □ 6 rails

Add bullet:

- Right side door hinges

*See separate accessories data sheets for details




© 2015 Henny Penny Corporation, Eaton, OH 45320 USA Revised 03182020

FlexFusion[™] Combi Oven Space\$aver[™] Plus

FSEN610 Electric

FSEN610.608.01 Electric

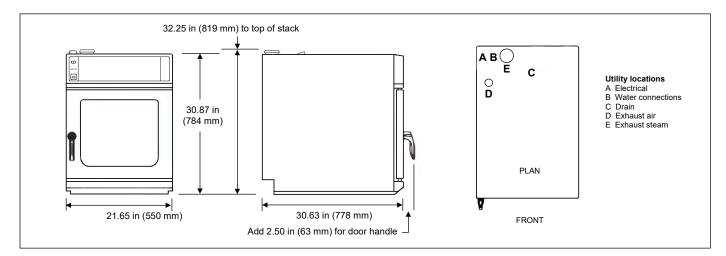

Dimensions

Height	30.87 in 32.25 in	(784 mm) (819 mm) top of stack
Width	21.65 in	(550 mm)
Depth	30.63 in	(778 mm)
Crated		
Length	36 in	(920 mm)
Depth	25 in	(620 mm)
Height	34 in	(860 mm)
Volume	18 ft ³	(0.5 m ³)

Required clearances

Weight 176 lb

Sides	2 in	(50 mm) air flow
Back	2 in	(50 mm) air flow, utilities
Front	28 in	(700 mm) door open

(80 kg)

Heat (see also Cooking mode profiles) Max temperature 572°F (300°C)

Water

0.75 in standard cold water connection 0.75 in soft water connection 1.5 in (40 mm) drain

Capacity

- 5 full-size 2.5 in (65 mm) steam table pans OR
- 6 half-size sheet pans 13 x 18 x 1 in (330 x 457 x 25 mm)

Electrical

Volts	Phase	Hertz	kW	Amps	Wire*
208	3	60	7.4	22.2	3+G

*Units shipped with power cord

Continuing product improvement may subject specifications to change without notice.

24 Hour Technical Support: Henny Penny Technical Service 800 417.8405 technicalservices@hennypenny.com

Cooking mode profiles

Steaming/moist heat 86-266°F (30-130°C) Low and high temperature steaming Convection cooking/dry heat 86-572°F (30-300°C) electric Active humidity reduction Combination/dry + moist heat 86-482°F (30-250°C) Manual or automatic humidity control between 0 and 100% RH Rethermalizing/dry + moist heat 86-356°F (30-180°C) Special fan 5-speed function, banqueting programs

Bidding specifications

Provide Henny Penny FlexFusion Space\$aver[™] Plus model FSEN610 electric combi oven, designed to cook with steaming/moist heat, convection/dry heat, or a combination of dry and moist heat, and holding up to 5 full-size steam table pans 2.5 in (65 mm) or 6 half-size sheet pans 1 in (25 mm) pans or grids on removable tilt-resistant rails.

Unit shall incorporate:

- Chef's Touch Control System featuring protected full-color capacitive touch screen with automatic and manual cooking capability, ClimaSelect Plus humidity control and designated pre-loaded apps
- Boilerless DynaSteam2 Technology with precise humidity generation
- Variable speed, auto reverse fan that moves air in alternating directions for more even heating
- Unit earns the ENERGY STAR[®] mark
- Automated WaveClean[®] self-cleaning system
 Seamless stainless steel cooking chamber, full-
- perimeter door seal and triple-pane glass for energy efficiency
- Cabinet exterior 20-gauge stainless steel

Wire* 3+G Laboratory certifications @ Us

Henny Penny Corporation PO Box 60 Eaton OH 45320 USA

+1 937 456.8400 800 417.8417 +1 937 456.8434 Fax 800 417.8434 Fax www.hennypenny.com

