# MOTAK

Heated Proofing Cabinets

# Model #: MHP-F-N-C, MHP-F-I-C MHP-F-I-S, MHP-2H-I-S

# Product Details

- Constructed of anodized 6063 aluminum extrusion
- .08" thick aluminum base with formed channels
- Field reversible doors (requires left hand hinge set): MHP-F-N-C: .08" thick clear lexan
  - MHP-F-I-C: .08" thick clear lexan
  - MHP-F-I-S: Double-layer aluminum
  - MHP-2H-I-S: Double-layer aluminum (double door)
- Air baffle design and forced air circulation
- Easy to read LED thermometer



- Insulated door and cabinet with as low as 0.04W m2.K with thickness of 1.2 inch
- Corner bumpers prevent unit from impact
- Removable control drawer for easy cleaning and maintenance
- Four (4) 3" casters, two (2) with brakes, for mobility
- Holds up to 36 full size sheet pans; 1 1/2" of clearance between slides
- Insulated models offer energy savings
- Supplied with 6.3' NEMA 5-15P cord with cable cover to provide additional electrical protection and safety
- Heating mode: with adjustable settings keeps cabinet temperatures up to 180°F (80°C)
- Proof mode: adjusts humidity between 30% and 95% and temperature up to 115°F (46°C)
- Electric:
- 120V / 60Hz / 1Ph

(208-230V / 50-60Hz / 1Ph is available as an option)

6.3' NEMA 5-15P cord set included



MHP-F-N-C

Not suitable for installation in non-commercial or residential applications.



#### MOTAK reserves the right to make changes to the design or specifications without prior notice.

### MOTAK | 305 KaTom Drive, Kodak, TN 37764 | 800-541-8683 | www.katom.com



Warrantl


MHP-F-I-C

# MOTAK


# Heated Proofing Cabinets

## Model #: MHP-F-N-C, MHP-F-I-C MHP-F-I-S, MHP-2H-I-S

Front View

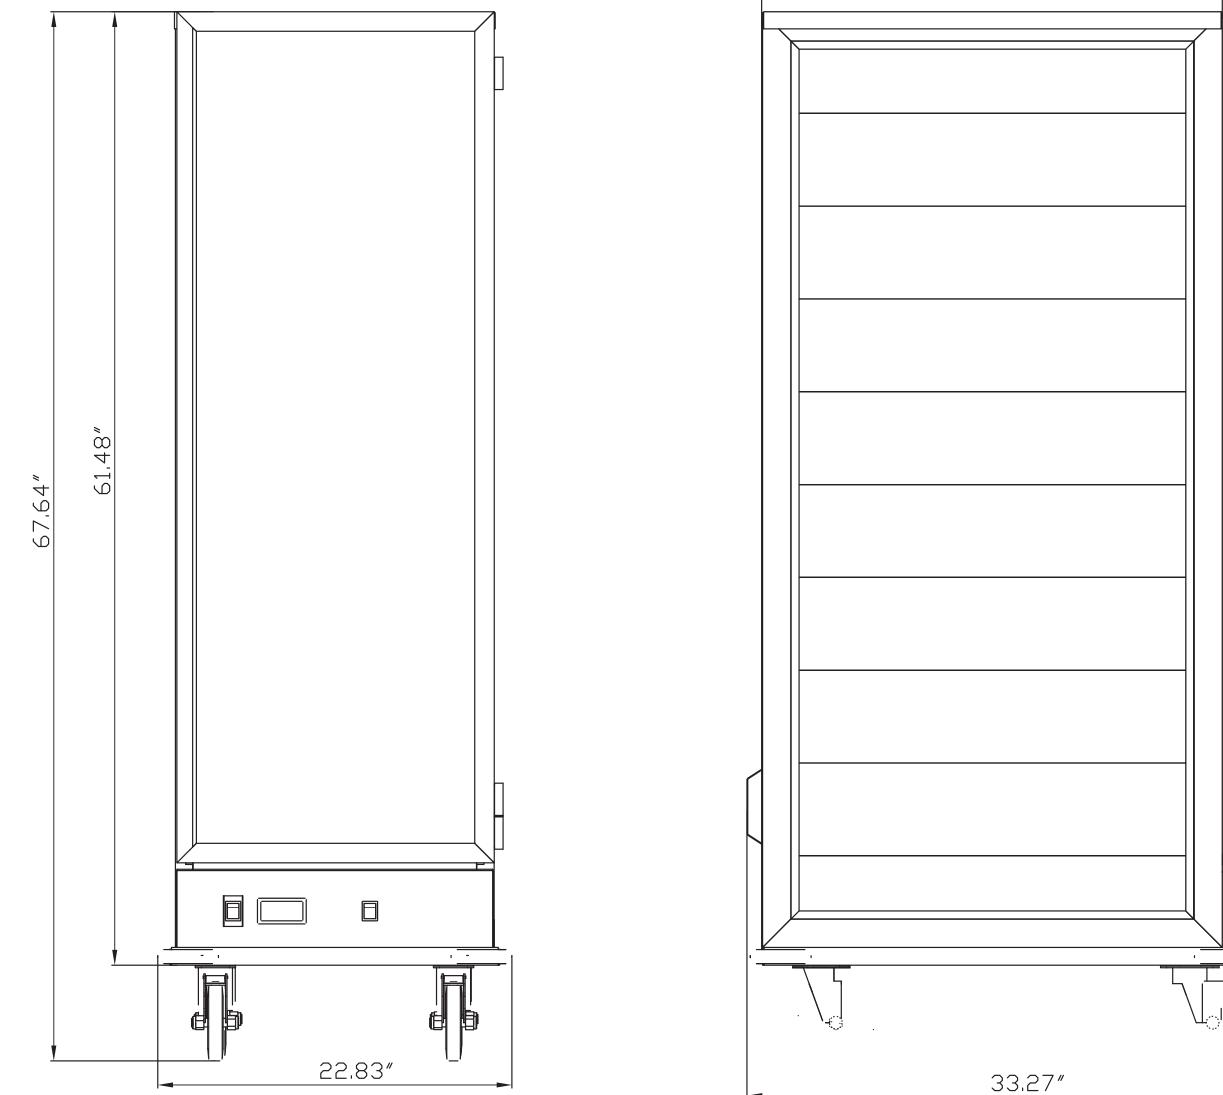

## Side View

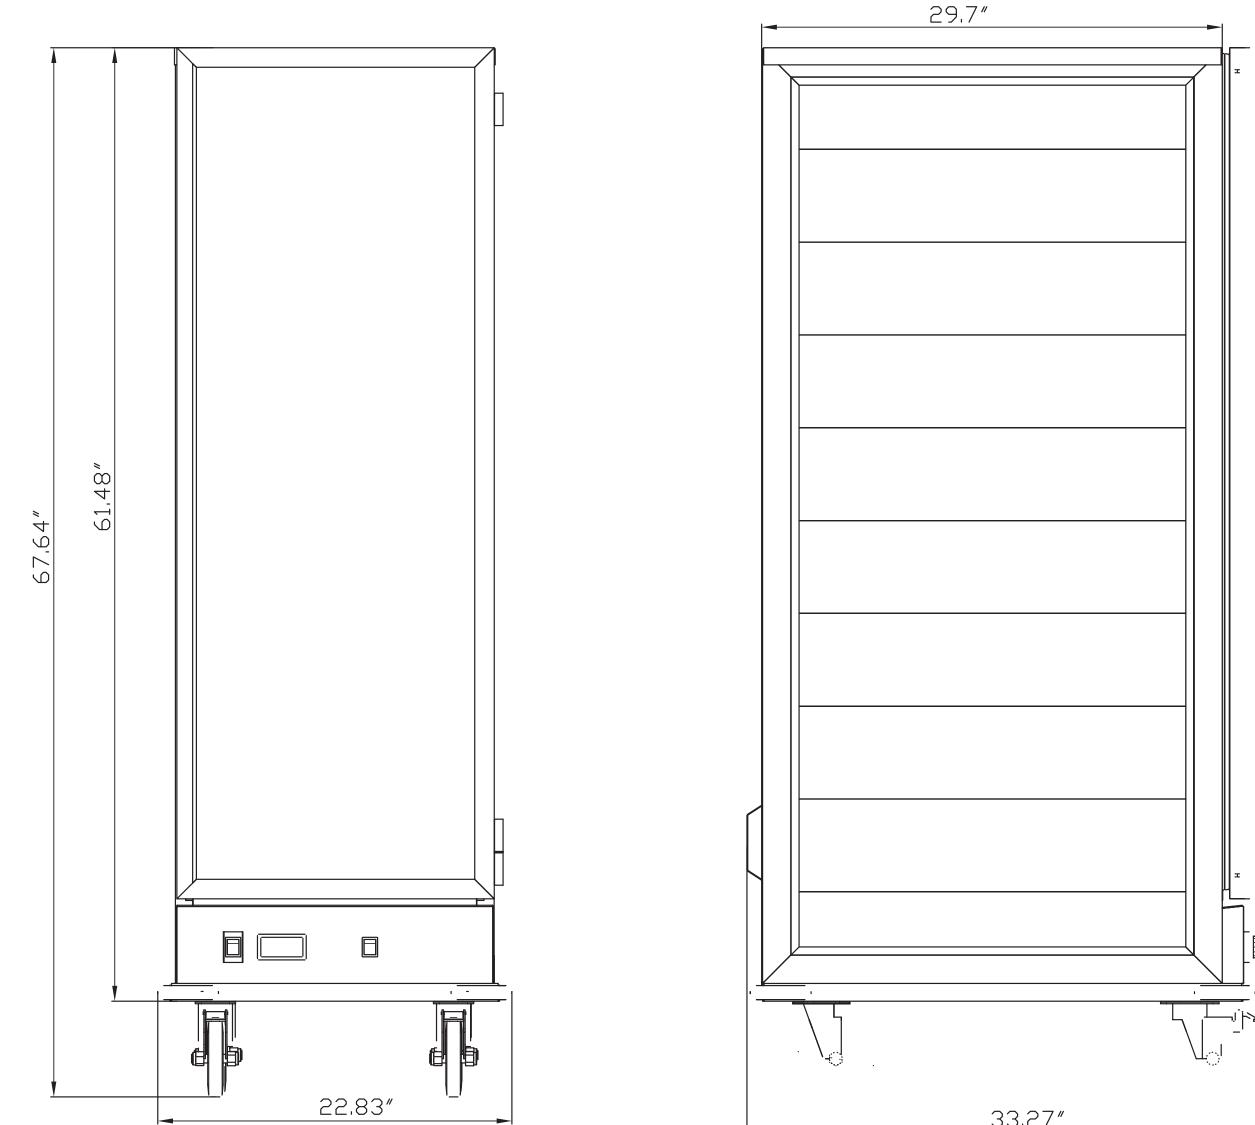

## Specifications

Model	Capacity (full size sheet pans)	Cabinet Dims (in)					4		Shipping	
		W	D	Н	Voltage	Watts	Amps	Plug	Weight	Insulation
MHP-F-N-C	36	22.83" 579.9 mm	<b>33.27"</b> 845.1 mm	67.64" 1718 mm	120V / 60Hz / 1 Ph	1500	12.5	NEMA 5-15P	160 lbs / 73 kg	No
MHP-F-I-C	36	22.83" 579.9 mm	<b>33.27"</b> 845.1 mm	67.64" 1718 mm	120V / 60Hz / 1 Ph	1500	12.5	NEMA 5-15P	175 lbs / 79 kg	Yes
MHP-F-I-S	36	<b>22.83"</b> 579.9 mm	<b>33.27"</b> 845.1 mm	67.64" 1718 mm	120V / 60Hz / 1 Ph	1500	12.5	NEMA 5-15P	198 lbs / 90 kg	Yes
MHP-2H-I-S	34	22.83" 579.9 mm	<b>33.27"</b> 845.1 mm	67.64" 1718 mm	120V / 60Hz / 1 Ph	1500	12.5	NEMA 5-15P	198 lbs / 90 kg	Yes

### MOTAK reserves the right to make changes to the design or specifications without prior notice.

## MOTAK | 305 KaTom Drive, Kodak, TN 37764 | 800-541-8683 | www.katom.com



JAN2324