

5070

High-temp Undercounter Dishwasher

Model #: MD-UC-HTB30P

Product Details

- Higher clearance: 15 1/4"
- Double skin stainless steel body structure with stamped design (wash tank, rack guides, control panel), made to resist strong usage
- Built-in drain pumps, detergent, and rinse aid dispenser, and pressure gauge
- IPX4 - Stronger protection against water hose cleaning and external humidity
- Multi-connection box: Conveniently located electrical box for easy access that improves maintenance
- AISI-304 Stainless steel double wash/rinsing arms and tray filters.
- Digital Controls: Simple digital control panel with temperature display for intuitive and user-friendly operation, IPX-4 proof
- Effi Wash: Optimized hydraulic system provides a strong mechanical action combined with the optimum clean water in the tank. Balanced power keeps the perfect sanitation temperature during the cycle of the wash
- Effi Silent: Full double skin provides extra insulation on body and door for noise reduction and thermal efficiency
- Rock counterbalanced door. Double spring and stainless steel hinge system tested to resist the hardest usage. Safe 3 step open system: remove steam (1), check rack (2), and remove/ place rack (3)
- Soft Start: Wash-pump power control that prevents wares from damage at the beginning of the washing cycle while assuring a low noise level
- Hot water assurance: Working in series with the booster heater, this relay insures the timer will not advance to the rinse cycle until the sanitation temperature of the rinse water (180 °F) is met
- Multi Power: Adapt the power level to your needs. Choose the maximum power for the highest production requirements or reduce consumption with a low power set up
- Versatile: Easily configure your dishwasher as a glasswasher or sanitizer whenever you need it

Not suitable for installation in non-commercial or residential applications.

Certifications



Size

23-5/8"W x 23-5/8"D x 33-11/16"H

Capacity

30/20 Racks per hour

Cycle Periods

90/120/180 seconds





5070


High-temp Door Type Dishwasher

Model #: MD-UC-HTB30P

Plan View

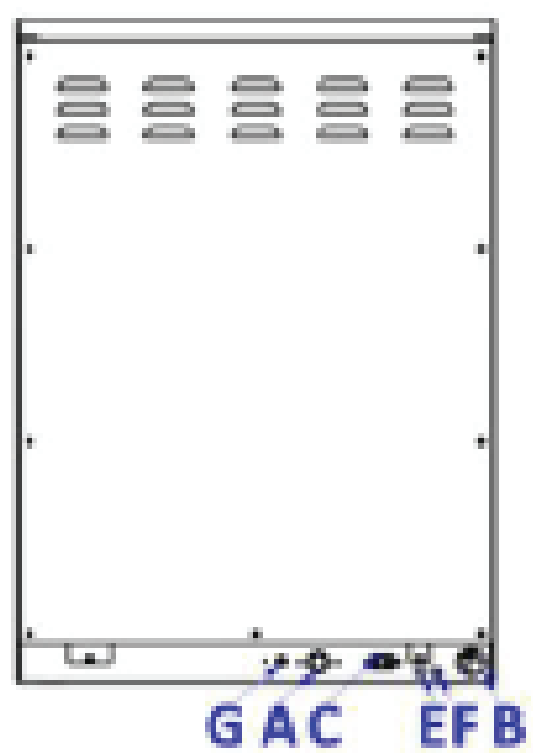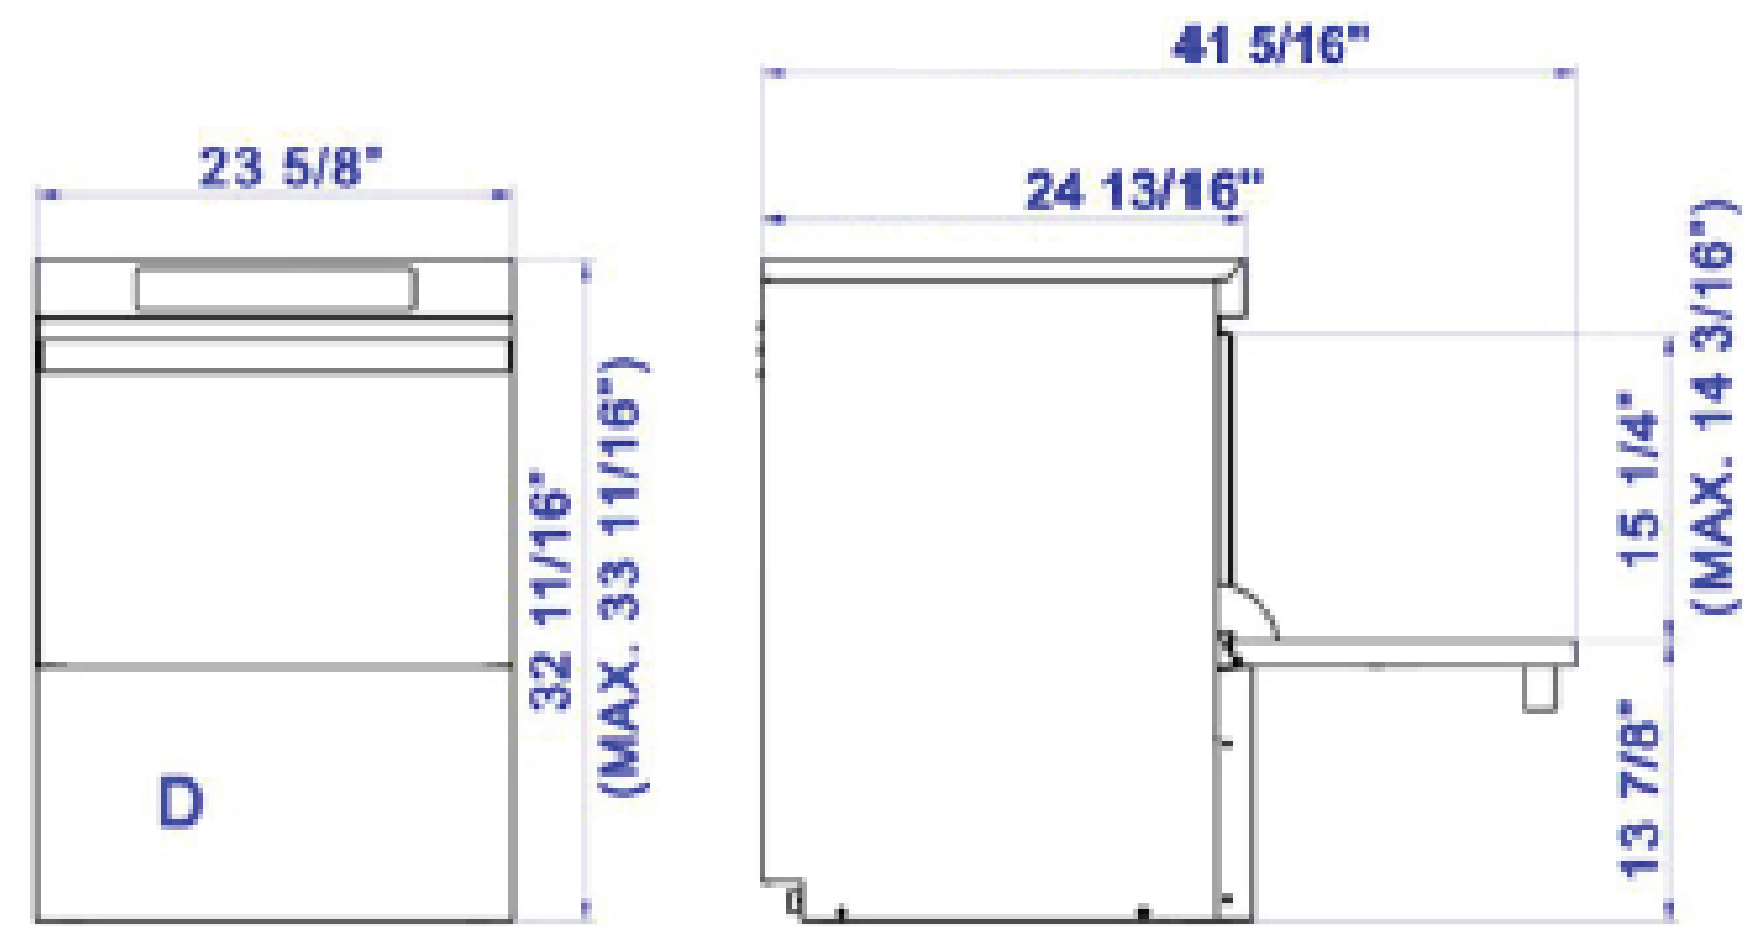

A	Water inlet	3/4"
B	Drain hose	5'
C	Power supply cable, strain relief	6' power cord
D	Connection strip (Inside)	
E	Rinse aid inlet	
F	Detergent inlet	
G	Equipotential bond	

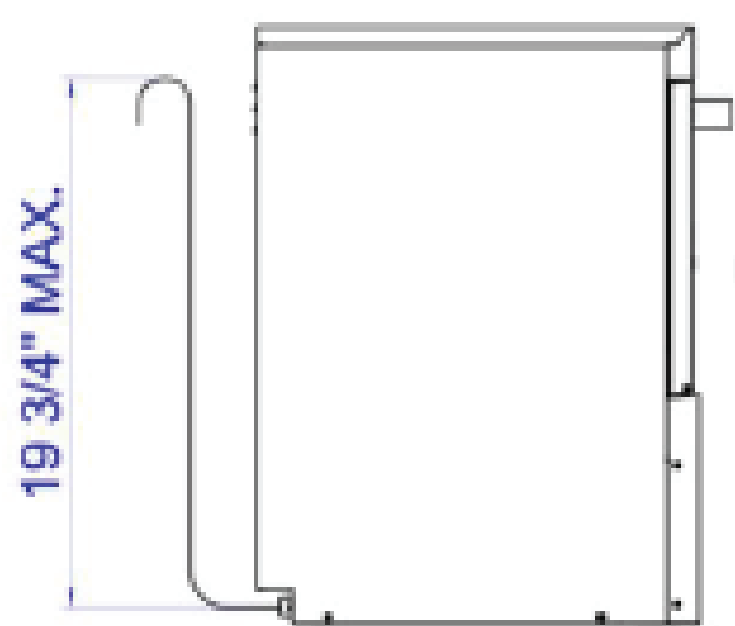

Specifications

	MDUCHTB30P
Voltage	208-230V/1-3Ph/60Hz
Wash Pump(s)	0.64 kW
Tank Heating Element	3.05 kW
Boiler/Booster Heating Element	3.05/4.07/6.10 kW
Total Power	3.69/4.71/6.74 kW
Wash Pump Motor	3/4 HP
Clearance	15-1/4"
Work Height	13-7/8"
Tank Capacity	5.40 gal.
Boiler Capacity	1.85 gal.
Water Pressure	20-25 psi
Water Consumption Per Cycle	0.53 gal.
Water Consumption Per Hour	15.9 gal.
Water Protection Rating	IPX4
Washing Water Temperature	150°F
Rinsing Water Temperature	180°F
Water Inlet	3/4"
Water Inlet Temperature	120°F-140°F
Net Weight	167 lbs.
Gross Weight	178 lbs.
Packing Size	26"W x 29-1/2"D x 40-1/2"H
Noise Level	<65 dBA