


# 4' x 75', Drainage, Black, Superfoam™ Anti Fatigue Mat, T17

## **Product Images**

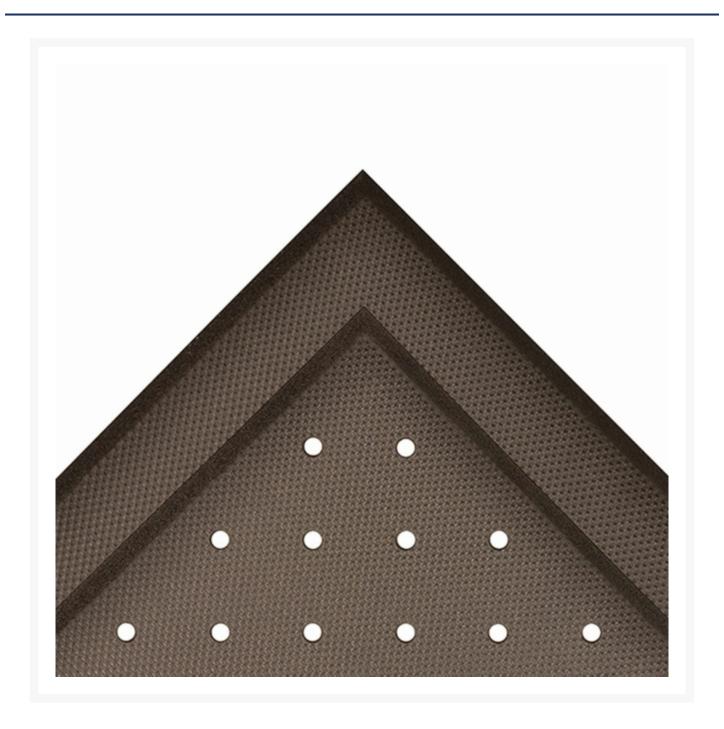

#### **Short Description**

- Highly resistant to grease, oils and animal & vegetable fats
- Closed cell Nitrile/PVC foam, does not absorb liquids
- Durable and abrasion resistant
- Solid for dry areas
  Perforated drainage holes to remove liquid and debris for worker platform
- 45° beveled edges on all 4 sides

#### Description

Superfoam™ is an extremely lightweight durable anti-fatigue foam mat designed especially for ease of handling and ergonomic comfort. Made from a closed cell PVC/Nitrile foam blend Superfoam™ does not absorb liquids and is highly resistant to greases, oils, animal & vegetable fats. This allows it to be used in areas where occasional overspray and dripping occur such as dishwashing stations and bar areas. Because Superfoam™ is lightweight, it is the perfect mat for use in areas where mats are regularly moved for cleaning like cooking lines, service counters, and food prep stations.

2

# Specifications

| Model No            | T17RP475BL   |
|---------------------|--|
| Color               | Black  |
| Dimensions          | 4ft x 75ft   |
| Thickness           | 5/8in  |
| UPC                 | 662641912250   |
| Special Price Type  | Sale   |
| Available Colors    | Black  |
| Roll Sizes          | 3'x75', 4'x75'   |
| Custom Lengths      | 3' and 4' widths (up to 75' long)  |
| Standard sizes      | 2'x3', 3'x3', 3'x4', 3'x5', 3'x6', 3'x8'   |
| Group               | Ergonomic, Anti-fatigue & Safety Matting   |
| Environment         | Wet/Dry and Oily Areas   |
| Recommended Use     | Ideal for stationary standing workstations, sit-stand desks, packing stations, office environments, reception areas, wait stations, service counters, cashiers |
| Special Remarks     | Closed cell foam construction will not absorb liquids and is extremely resistant to commonly found chemicals, oils, and greases.                               |
| Surface             | Structured Pebble Pattern  |
| Edges               | Beveled edges on all sides   |
| Usage Intensity     | Medium duty  |
| Process             | Foaming  |
| Weight Lbs/sqft     | 0.81   |
| Thickness Inch      | 5/8in  |
| Fire Rating US      | Pass   |
| REACH Compliant     | Reach compliant (Registration, Evaluation, Authorization and Restriction of Chemicals).  |
| Anti-Fatigue Rating | Superior   |
|                     |  |

3

| Slip Resistance Rating | Best |
|------------------------|------|
| Wear Resistance Rating | Best |

### Prop 65

⚠WARNING:This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov.