



TOP SHELF MULTI-TANK SINKS
TS & TSF Series Two Compartment Sinks (M2)

NSF
 C US
 ASME A112.19.3/
 CSA B45.4
 NSF/ANSI 2



TSF24M2

JOB	
AREA	
ITEM NO.	
MODEL NO.	

MODELS	
TS SERIES	TSF SERIES
TS24M2	TSF24M2

MODEL NUMBERS - TS24M2, TSF24M2

KEY PRODUCT FEATURES AND BENEFITS

- Drawn 18 gauge stainless steel sink bowl has a long life span and is dent resistant, even under heavy use.
- Models with drainboard tops are pitched to the drain, so water is evacuated quickly and effectively. With the matching insert, you still get a flat, level space to store your glassware.
- Drainboards have 'stadium' shaped perforated inserts for maximum air circulation.
- TSF units with drainboards have TSF depth (24") drainboards to maximize space for clean and dirty glassware.
- Our new, more robust Perlick Quick Clamp leg attachment still features easy tool-less installation, when legs are used.
- All stainless construction with 18 gauge seamless stainless steel front apron for durability and cleanability.

Additional Features:


- All multi-tank stainless steel sinks are comprised of 10" x 14" x 9 1/4" deep bowls which have a compound pitched bottom to ensure complete drainage.
- Optional Perlick Flex Mount leg relocation kit moves rear legs forward for additional space behind the equipment or moves forward legs rearward to help avoid pesky floor drains, available on TSF units.
- Seamless 18 gauge stainless steel front apron for durability and easy of cleaning.
- Stainless steel legs with adjustable thermoplastic feet install without tools for freestanding applications.
- Optional NSF-listed commercial-grade hot/cold water faucet stands up to years of use and can be serviced from the front.

Form No. Z2963
 Rev. 12.05.23



TOP SHELF MULTI-TANK SINKS
TS & TSF Series Two Compartment Sinks (M2)

MODEL NOS.		TS(F)22M2
DIMENSIONS:	Width In. (mm)	24 (610)
	Weight lb. (kg)	65 (30)
MATERIALS	Construction	All stainless steel
	Top & Deck	18 gauge stainless steel
	Front & Back	Seamless 18 gauge stainless steel
	Backsplash	Stainless steel 6" high (4" high optional) with 1" return at the top, mechanically fastened and sealed
	Legs	1-5/8" tubular, stainless steel with 1" adjustable thermoplastic feet
	Bowls	Stainless steel. 10"x14"x9-1/4" deep. All horizontal and vertical edges 1-1/2" radius with balled corners. Furnished with 1-1/2" stainless steel drain socket. 8-1/2" standpipe.
	Water Faucet	Hot and cold, heavy-duty all brass construction, chrome plated 6" swing spout faucet. Must be ordered separately.
MECHANICALS	Plumbing	Drain connection: 1-1/2" NPS male. Hot and cold water connection. 3/8" braided stainless steel supply lines with optional faucet.
OPTIONAL ACCESSORIES (PARTIAL LIST)	6" swing spout, wall or deck mounted lead free faucet, drain manifold kit	

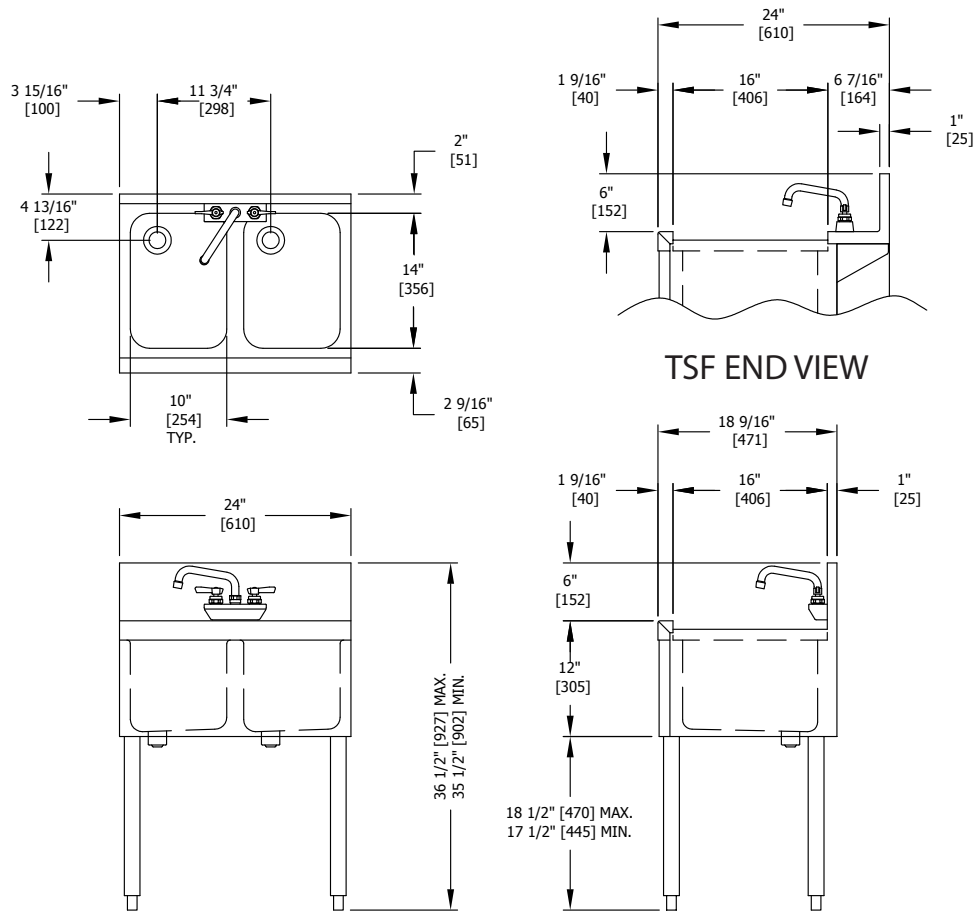

Shown with optional faucet. Must be ordered separately.

Form No. Z2963
 Rev. 12.05.23