

# SINGLE HOB INDUCTION COOKTOP



## NON-TOUCH DISPLAY



HELIOS STANDARD, FREESTANDING



HELIOS STANDARD, DROP-IN

## TOUCH DISPLAY



HELIOS TOUCH, FREESTANDING

## FEATURES

- 1800 watts (US and Canada), 2500 watts, and 3500 watts
- Available in 100–120 VAC and 200–240V, single phase
- Freestanding or drop-in design with stainless steel housing
- Sloped front panel on freestanding design
- Helios Standard or Helios Touch display options for freestanding design
- High-quality internal electronics and heavy gauge Litz wire
- Easy-to-clean high temperature glass-ceramic top
- 4.3" display
- Even heat distribution across bottom of cookware\*
- Temperature range from 85°F–425°F (29°C–218°C)
- Automatic pan detection allows for instant energy transmission to pan
- Automatic shut-off feature prohibits overheating
- Integral grease filter and air baffle ensure air intake is cleaner and cooler
- Microprocessor monitors vital components to check for overheating, power supply issues, and more

## INCLUDED

- Two-year advanced replacement warranty – U.S. and Canada
- Integral fan to keep internal components cool
- Standard Cat 5e or Cat 6 patch cable from unit to control box
- Plug and cord (6 ft. nominal)



## CERTIFICATIONS







\*Induction cooking requires the use of induction-compatible (i.e. magnetic) cookware.

It is the owner and installer's responsibility to comply with all local codes. CookTek reserves the right to make substitutions of components or change specifications without prior notice.



## HELIOS STANDARD FREESTANDING

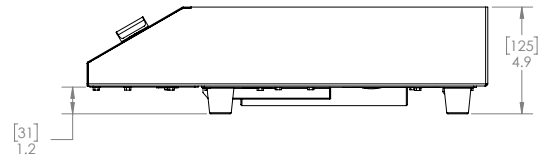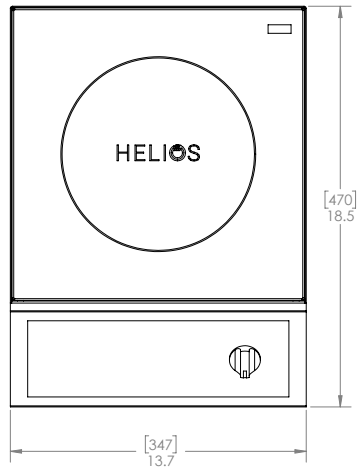

## HELIOS STANDARD DROP-IN



## HELIOS TOUCH FREESTANDING

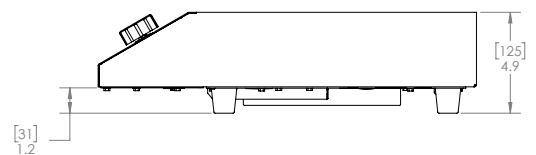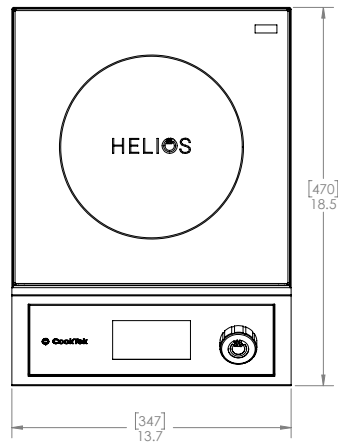

DIMENSIONS - HELIOS STANDARD FREESTANDING		
Full Unit Height	4.9"	125 mm
Full Unit Width	13.7"	347 mm
Full Unit Depth	18.5"	470 mm
Feet Height	1.2"	31 mm
Weight	19 lb.	8.6 kg
Max Ambient Temperature	122°F	50°C
WALL CLEARANCE*		
Front	2"	51 mm
Sides	2"	51 mm
Rear	2"	51 mm

DIMENSIONS - HELIOS STANDARD DROP-IN		
Full Unit Height	3.7"	93 mm
Full Unit Width	13.5"	343 mm
Housing Width	12.8"	324 mm
Full Unit Depth	13.5"	343 mm
Housing Depth	12.8"	324 mm
Cutout Width	13.13"	334 mm
Cutout Depth	13.13"	334 mm
Weight	15 lb.	6.8 kg
Max Ambient Temperature	122°F	50°C
WALL CLEARANCE*		
Front	2"	51 mm
Sides	2"	51 mm
Rear	2"	51 mm

DIMENSIONS - HELIOS TOUCH FREESTANDING		
Full Unit Height	4.9"	125 mm
Full Unit Width	13.7"	347 mm
Full Unit Depth	18.5"	470 mm
Feet Height	1.2"	31 mm
Weight	19 lb.	8.6 kg
Max Ambient Temperature	122°F	50°C
WALL CLEARANCE*		
Front	2"	51 mm
Sides	2"	51 mm
Rear	2"	51 mm

SHIPPING INFORMATION		
Packaged Height	9"	229 mm
Packaged Width	18.75"	476 mm
Packaged Depth	20.75"	527 mm
Packaged Weight	24 lb.	10.9 kg
Item Class	250 NMFC #26710	



NEMA 5-15P



BS 546, 16A, 250V



NEMA 6-20P



SI 32, 16A, 250V



BS1363, 13A, 230V



AS/NZS 3112:2000, 10A, 250V



IEC 309, 16A, 3-pin



CEE 7/7 Schuko, 16A, 250V



AS/NZS 3112:2000, 15A, 250V

ELECTRICAL SPECIFICATIONS - SINGLE PHASE HELIOS STANDARD FREESTANDING		
UNITED STATES/CANADA		
HRF-9500-SH18-1	Freestanding, Helios Standard, 100-120 V, 50/60 Hz, 1800W	NEMA 5-15P
HRF-9500-SH25-1	Freestanding, Helios Standard, 200-240 V, 50/60 Hz, 2500W	NEMA 6-20P
HRF-9500-SH35-1	Freestanding, Helios Standard, 200-240 V, 50/60 Hz, 3500W	NEMA 6-20P
UK & SAUDI ARABIA		
HRF-9500-SH25-2	Freestanding, Helios Standard, 200-240 V, 50/60 Hz, 2500W	BS1363, 13A, 230V
HRF-9500-SH35-2	Freestanding, Helios Standard, 200-240 V, 50/60 Hz, 3500W	IEC 309, 16A, 3-pin
AUSTRALIA		
HRF-9500-SH25-4	Freestanding, Non-Touch 200-240 V, 50/60 Hz, 2500W	AS/NZS 3112:2000, 10A, 250V
HRF-9500-SH35-4	Freestanding, Non-Touch 200-240 V, 50/60 Hz, 3500W	AS/NZS 3112:2000, 15A, 250V
JAPAN		
HRF-9500-SH25-6	Freestanding, Helios Standard, 200-240 V, 50/60 Hz, 2500W	NEMA 6-20P
HRF-9500-SH35-6	Freestanding, Helios Standard, 200-240 V, 50/60 Hz, 3500W	NEMA 6-20P
SOUTH AFRICA		
HRF-9500-SH25-7	Freestanding, Helios Standard, 200-240 V, 50/60 Hz, 2500W	BS 546, 16A, 250V
HRF-9500-SH35-7	Freestanding, Helios Standard, 200-240 V, 50/60 Hz, 3500W	BS 546, 16A, 250V
ISRAEL		
HRF-9500-SH25-8	Freestanding, Helios Standard, 200-240 V, 50/60 Hz, 2500W	SI 32, 16A, 250V
HRF-9500-SH35-8	Freestanding, Helios Standard, 200-240 V, 50/60 Hz, 3500W	SI 32, 16A, 250V

ELECTRICAL SPECIFICATIONS - SINGLE PHASE HELIOS STANDARD DROP-IN		
UNITED STATES/CANADA		
HRD-9500-SH18-1	Drop-in, Helios Standard, 100-120V, 50/60 Hz, 1800W	NEMA 5-15P
HRD-9500-SH25-1	Drop-in, Helios Standard, 200-240 V, 50/60 Hz, 2500W	NEMA 6-20P
HRD-9500-SH35-1	Drop-in, Helios Standard, 200-240V, 50/60 Hz, 3500W	NEMA 6-20P
UK & SAUDI ARABIA		
HRD-9500-SH25-2	Drop-in, Helios Standard, 200-240 V, 50/60 Hz, 2500W	BS1363, 13A, 230V
HRD-9500-SH35-2	Drop-in, Helios Standard, 200-240V, 50/60 Hz, 3500W	IEC 309, 16A, 3-pin
INTERNATIONAL		
HRD-9500-SH25-3	Drop-in, Helios Standard, 200-240 V, 50/60 Hz, 2500W	CEE 7/7 Schuko, 16A, 250V
HRD-9500-SH35-3	Drop-in, Helios Standard, 200-240V, 50/60 Hz, 3500W	CEE 7/7 Schuko, 16A, 250V
AUSTRALIA		
HRD-9500-SH25-4	Drop-in, Helios Standard, 200-240 V, 50/60 Hz, 2500W	AS/NZS 3112:2000, 10A, 250V
HRD-9500-SH35-4	Drop-in, Helios Standard, 200-240V, 50/60 Hz, 3500W	AS/NZS 3112:2000, 15A, 250V
JAPAN		
HRD-9500-SH25-6	Drop-in, Helios Standard, 200-240 V, 50/60 Hz, 2,500W	NEMA 6-20P
HRD-9500-SH35-6	Drop-in, Helios Standard, 200-240V, 50/60 Hz, 3500W	NEMA 6-20P
SOUTH AFRICA		
HRD-9500-SH25-7	Drop-in, Helios Standard, 200-240 V, 50/60 Hz, 2500W	BS 546, 16A, 250V
HRD-9500-SH35-7	Drop-in, Helios Standard, 200-240V, 50/60 Hz, 3500W	BS 546, 16A, 250V
ISRAEL		
HRD-9500-SH25-8	Drop-in, Helios Standard, 200-240 V, 50/60 Hz, 2500W	SI 32, 16A, 250V
HRD-9500-SH35-8	Drop-in, Helios Standard, 200-240V, 50/60 Hz, 3500W	SI 32, 16A, 250V

**ELECTRICAL SPECIFICATIONS CONTINUED ON PAGE 4**

\*The provided clearances apply to a unit not placed near a heat source. Refer to the owner's manual for clearance requirements if the unit is placed near a heat source.

**ELECTRICAL SPECIFICATIONS - SINGLE PHASE  
HELIOS TOUCH FREESTANDING**

<b>UNITED STATES/CANADA</b>		
HTF-9500-SH18-1	Freestanding, Helios Touch, 100-120V, 50/60 Hz, 1800W	NEMA 5-15P
HTF-9500-SH25-1	Freestanding, Helios Touch, 200-240 V, 50/60 Hz, 2500W	NEMA 6-20P
HTF-9500-SH35-1	Freestanding, Helios Touch, 200-240V, 50/60 Hz, 3500W	NEMA 6-20P
<b>UK &amp; SAUDI ARABIA</b>		
HTF-9500-SH25-2	Freestanding, Helios Touch, 200-240V, 50/60 Hz, 2500W	BS1363, 13A, 230V
HTF-9500-SH35-2	Freestanding, Helios Touch, 200-240V, 50/60 Hz, 3500W	IEC 309, 16A, 3-pin
<b>INTERNATIONAL</b>		
HTF-9500-SH25-3	Freestanding, Helios Touch, 200-240V, 50/60 Hz, 2500W	CEE 7/7 Schuko 16A, 250V
HTF-9500-SH35-3	Freestanding, Helios Touch, 200-240V, 50/60 Hz, 3500W	CEE 7/7 Schuko 16A, 250V
<b>AUSTRALIA</b>		
HTF-9500-SH25-4	Freestanding, Helios Touch, 200-240V, 50/60 Hz, 2500W	AS/NZS 3112:2000, 10A, 250V
HTF-9500-SH35-4	Freestanding, Helios Touch, 200-240V, 50/60 Hz, 3500W	AS/NZS 3112:2000, 15A, 250V
<b>JAPAN</b>		
HTF-9500-SH25-6	Freestanding, Helios Touch, 200-240V, 50/60 Hz, 2500W	NEMA 6-20P
HTF-9500-SH35-6	Freestanding, Helios Touch, 200-240V, 50/60 Hz, 3500W	NEMA 6-20P
<b>SOUTH AFRICA</b>		
HTF-9500-SH25-7	Freestanding, Helios Touch, 200-240V, 50/60 Hz, 2500W	BS 546, 16A, 250V
HTF-9500-SH35-7	Freestanding, Helios Touch, 200-240V, 50/60 Hz, 3500W	BS 546, 16A, 250V
<b>ISRAEL</b>		
HTF-9500-SH25-8	Freestanding, Helios Touch, 200-240V, 50/60 Hz, 2500W	SI 32, 16A, 250V
HTF-9500-SH35-8	Freestanding, Helios Touch, 200-240V, 50/60 Hz, 3500W	SI 32, 16A, 250V



Dedicated circuit required for each installation.