

# MOTAK

## Commercial Gas Range 6 Burners - 1 Griddle

Model #: **MR10-G24-C**

This commercial gas range has powerful 30,000 BTU cast iron burners. Each burner has a lift off head - individual pilot light - heavy duty 12" x 12" removable cast iron grate and individual instant light control knob. It is constructed with a stainless steel front, 24.75" high backriser and shelf, 6" adjustable stainless steel legs or casters and a 3/4" NPT gas connection.

The standard oven is powered with a 30,000 BTU burner and comes with two easy to remove oven racks. It includes a porcelain oven liner for easy cleaning and a compression spring door hinge system for durability. The oven thermostat adjusts from 200°F - 500°F and is equipped with a flame failure safety device.

**Not suitable for installation in non-commercial or residential applications.**



### Warranty

1 year parts & labor

### Product Details

#### Top Burner

- Cast iron burners each giving off 30,000 BTU/hour
- 12" x 12" cast iron top grates are removable for easy cleaning
- Each burner has an individual standing pilot light
- Push in knob with efficient Hi-Low burner system
- Removable crumb tray

#### Griddle

- 3/4" thick griddle plate
- 4" welded griddle side shields
- Stainless Steel "U" burner
- Heat every 6" - valve control every 12"

### Certifications



#### Oven

- 30,000 BTU/hr total output
- Flame failure safety device
- Adjustable thermostat from 200°F - 450°F
- Steel liner on door and sides with a porcelain oven liner
- Includes 2 removable and adjustable oven racks

#### Construction

- Stainless steel front, back riser and shelf
- Spring loaded door with cool to touch stainless steel oven door handle
- 6" stainless steel adjustable legs
- 3/4" rear NPT gas connection


MOTAK reserves the right to make changes to the design or specifications without prior notice.

JAN0621


## Commercial Gas Range 6 Burners - 1 Griddle

### Plan View

- A pressure regulator is provided with this unit.
  - Natural Gas 4.0" W.C.
  - Propane Gas 10.0" W.C.
- Rear Gas Connection 3/4" NPT

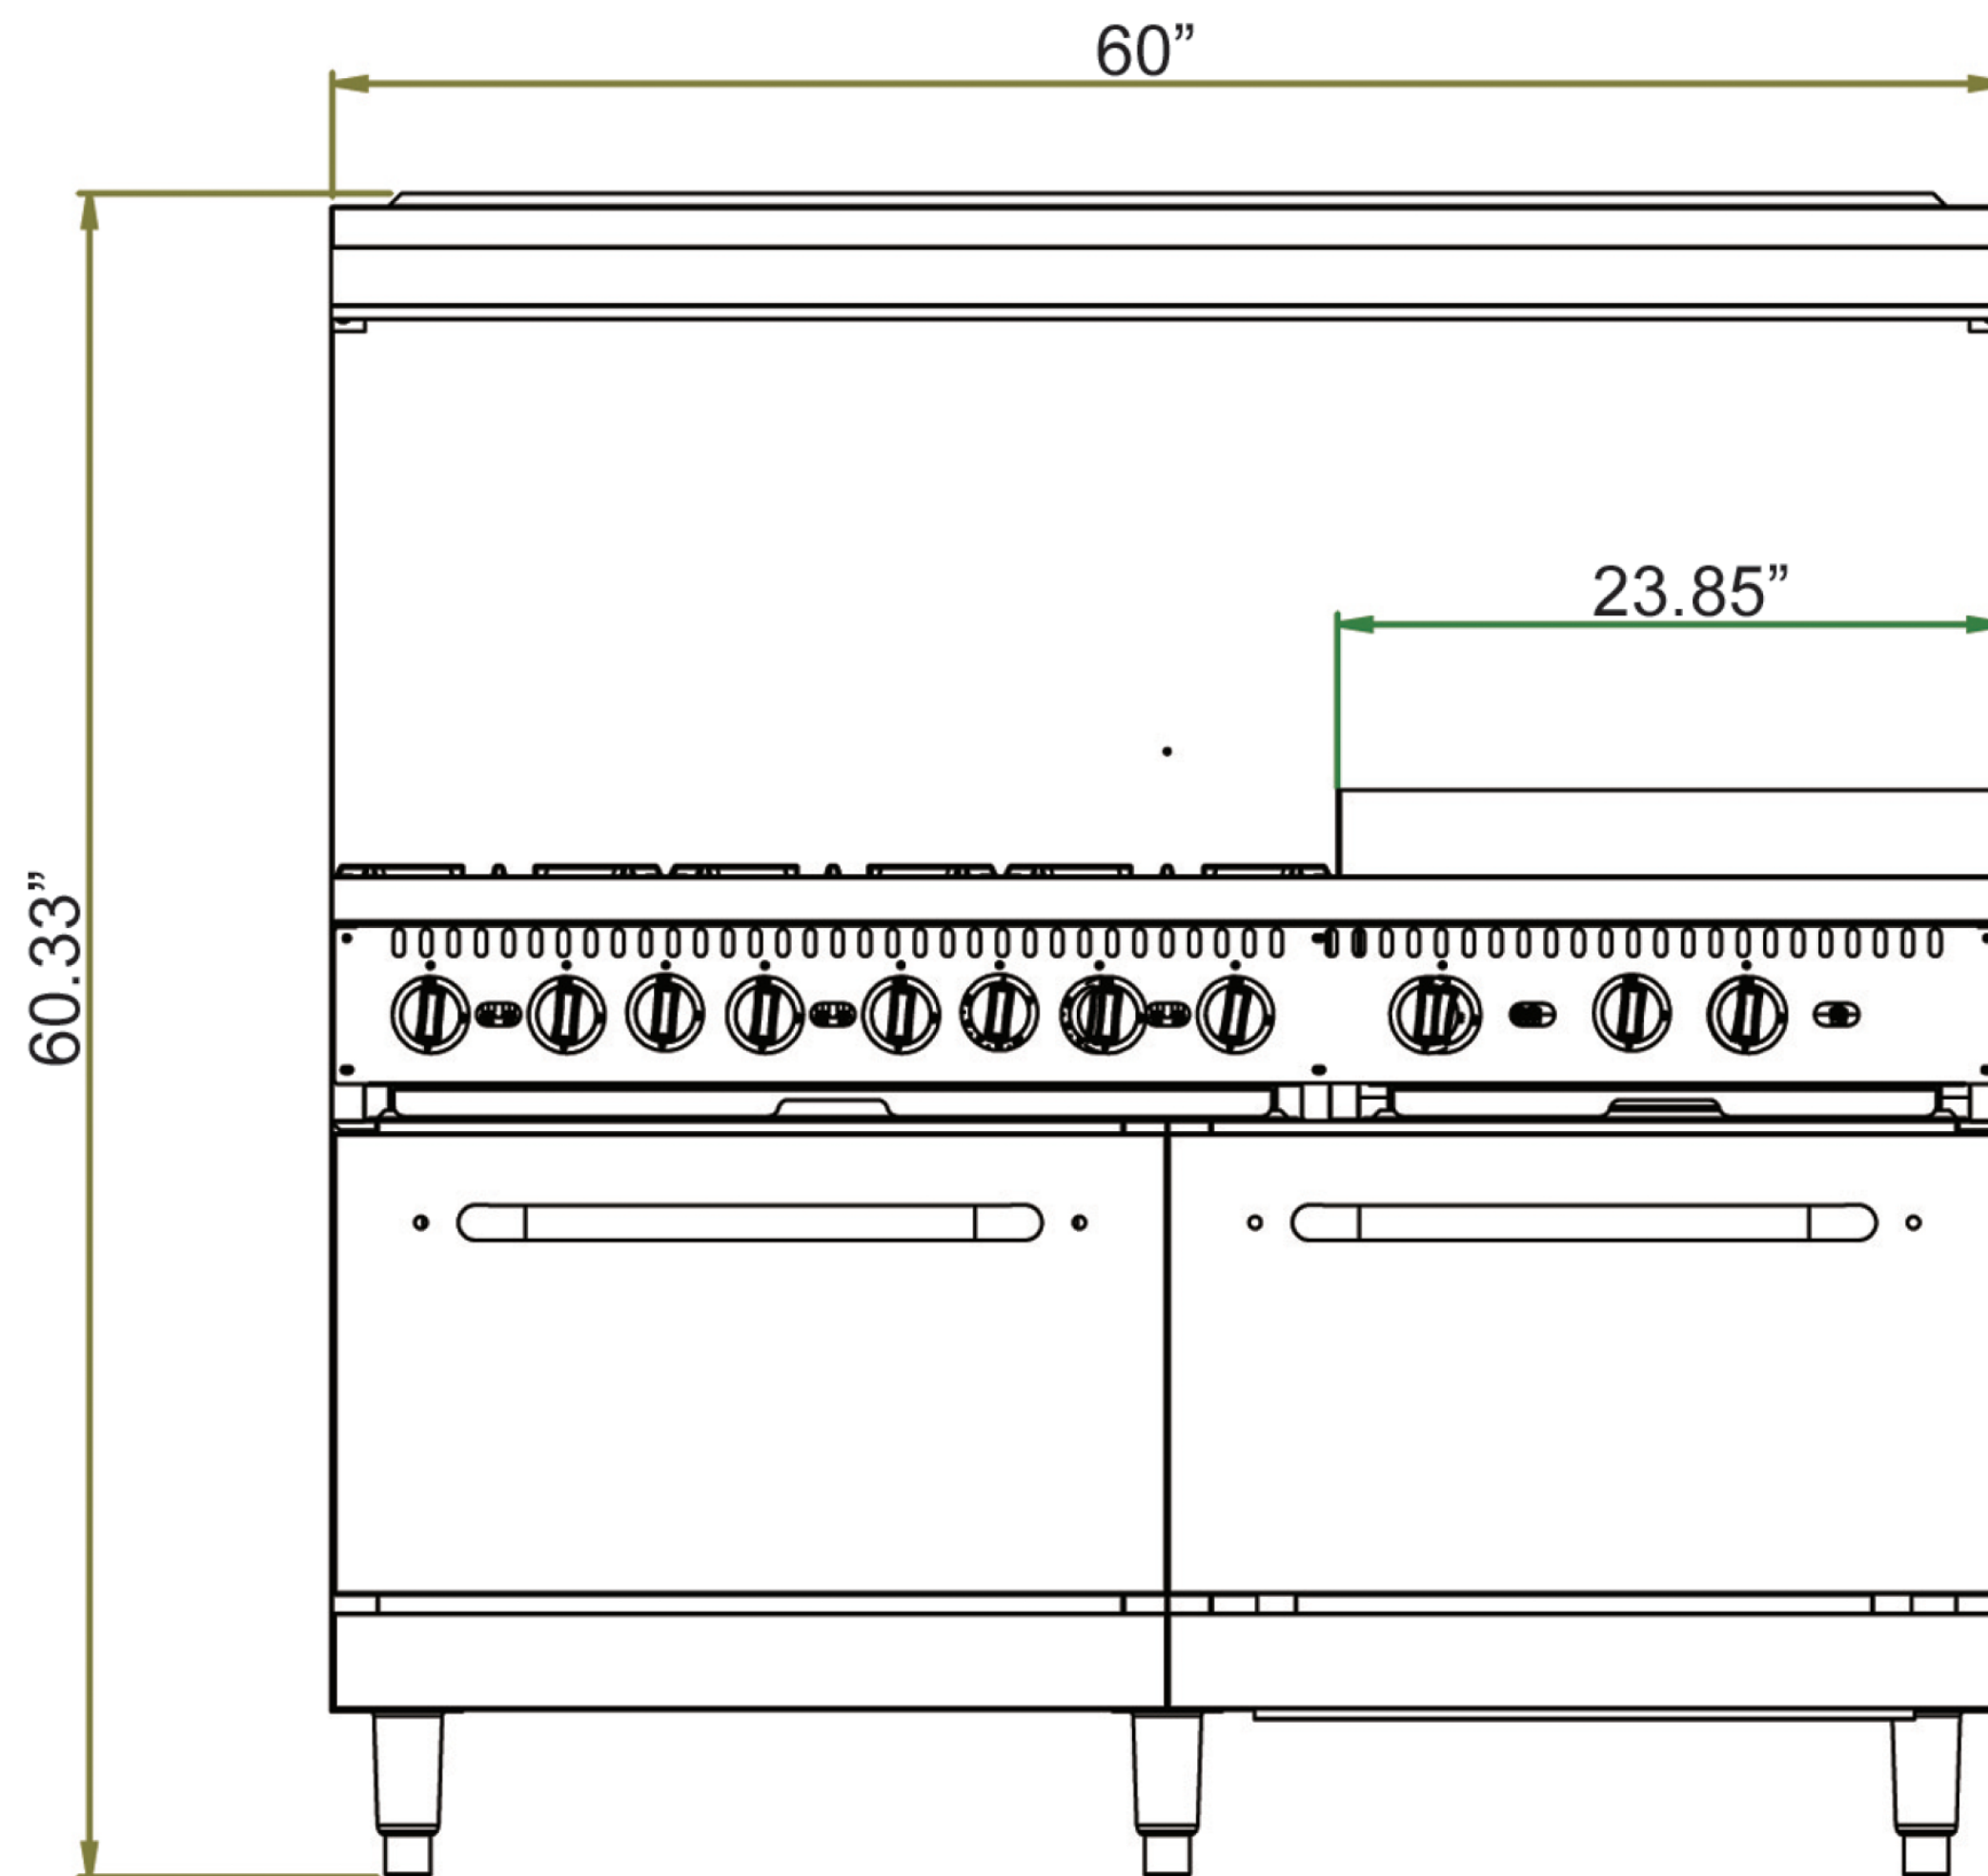

Front View

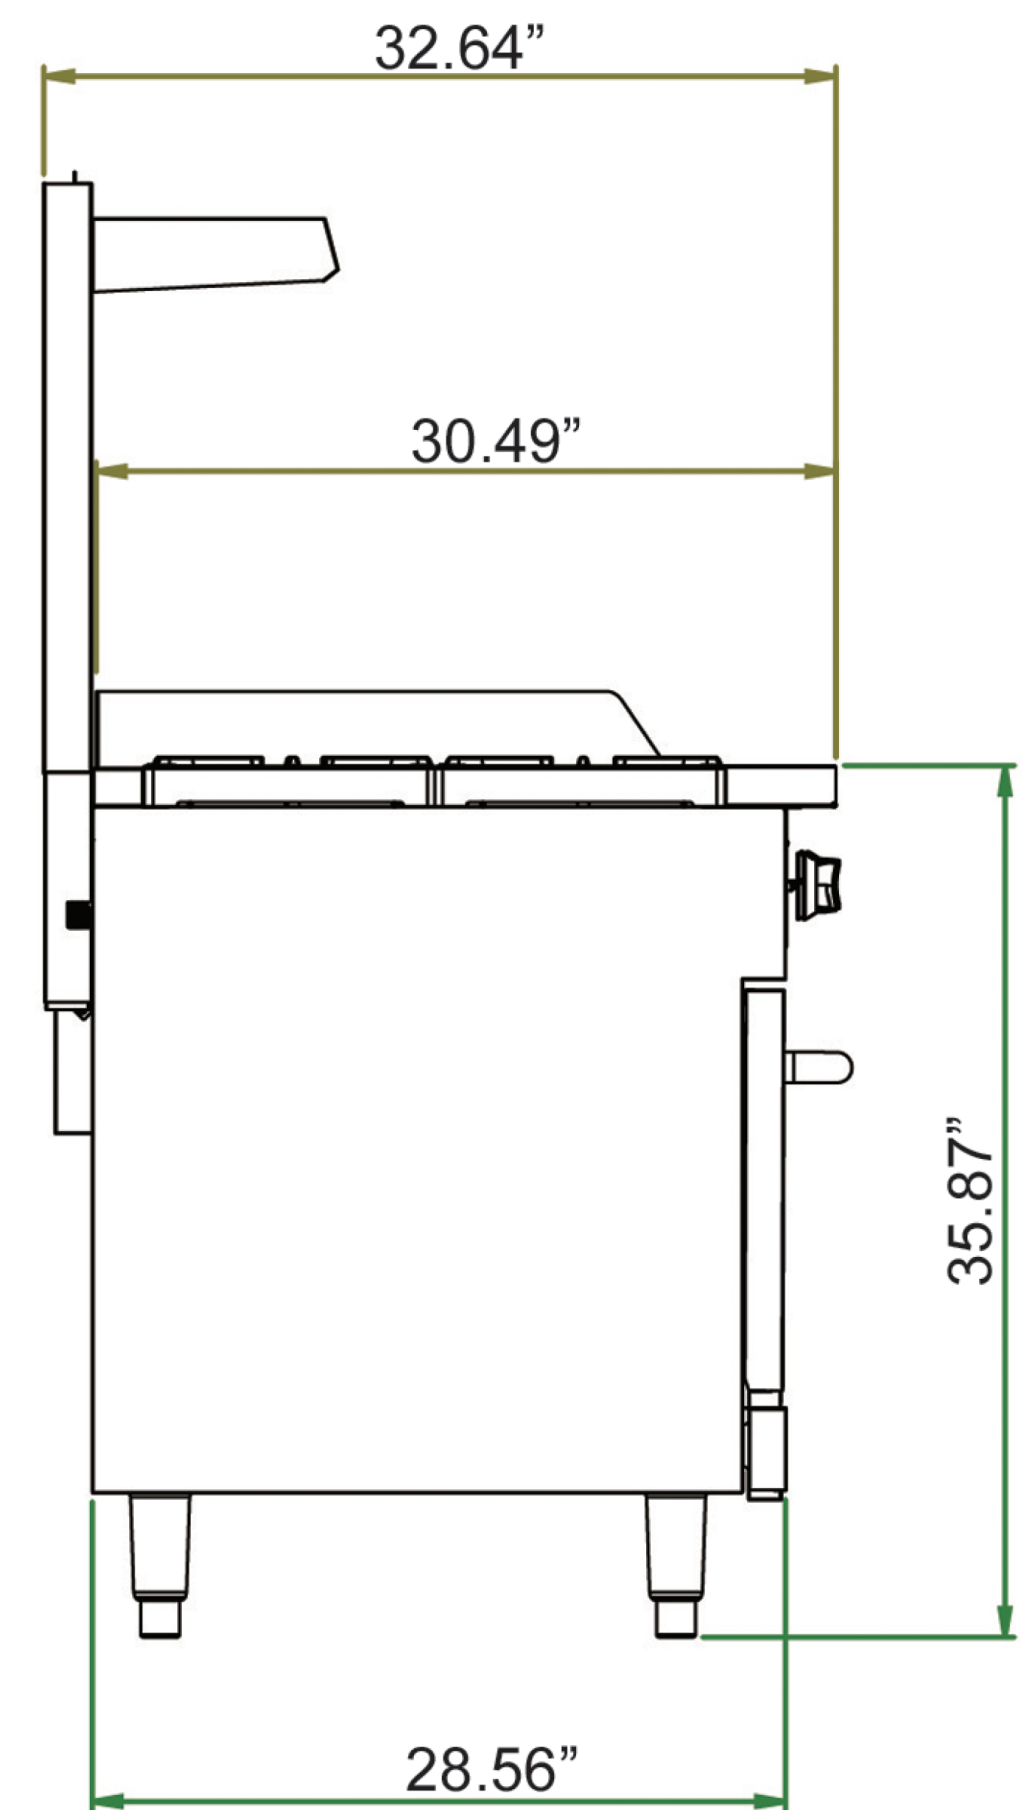

Side View

### Specifications

Model	Burners	External Dimensions			Internal Oven Dimensions			BTU (Per Burner)	BTU (Per Oven)	Total BTU	Crated Weight (lbs)
		Width	Depth	Height	Width	Depth	Height				
MR10-G24-C	6	60"	32.5"	60.5"	26.88"	25.8"	13.8"	30,000	30,000	360,000	816 lbs.

Not suitable for installation in non-commercial or residential applications.