

Item # _____

Job _____



was the very first company in the world to create and produce the concept of aluminum shelving and is the number one brand of food-grade shelving in Europe.

The shelving is manufactured of extruded and anodized aluminum with dishwasher-safe polymer inserts. The uprights are pre-assembled at the factory and the side rails ship with the polymer inserts. Assembly is via machined aluminum conical clamps that clip into pre-drilled holes in the uprights. The product is very easy to clean, very light, simple to assemble (no tools required), and comes with a **lifetime warranty against rust and corrosion**. We offer starter and expansion units as well as very comprehensive room configurations with open corners for all your shelving needs which also include mobile shelving, wall shelving, dunnage racks, and keg racks. We also have a unique capability in the industry to fully customize multiple rooms while communicating the layout specifications to the customer – thus creating MUCH less work on the part of the assembly team.



- High rigidity and stability due to (patented) assembly using conical anodized aluminum clips.
- Corner configuration available with full-depth connection and complete unobstructed access with the possibility of combining two different depths of shelving at the corners
- Uprights delivered fully assembled from the factory
- Tool-less quick and easy assembly with adjustable feet
- Incremental height adjustment in 6 in. (150mm) increments.
- Easy cleaning via the use of removable, dishwasher-safe shelf inserts (washable up to 100°C)
- Maximum weight/level : 800 lbs. per shelf over an evenly distributed load (600 lbs. per shelf for shelves longer than 47")
- Maximum weight/unit: 2000 lbs. between two uprights, and 1300 lbs. between two uprights with angle configuration.
- NSF Certified
- Product is packaged in pre-perforated shrink-wrapped plastic, requiring only a finger to open!
- Three depths (14", 18", and 22"), five heights (24", 57", 66", 71", and 83") and ten lengths (26", 31", 35", 38", 42", 47", 52", 59", 64", and 68") available
- We have a unique capability to fully customize multiple rooms while communicating the layout specifications to the customer – thus creating MUCH less work on the part of the assembly team.
- Fermod shelving will not corrode or rust! No more complaints from health inspectors! We offer a **lifetime warranty against rust and corrosion!**
- Complete modularity, offering the ability to interconnect and stagger shelving while in interconnected configuration.

Fermod, Inc.
5 Revere Drive
Suite 200
Northbrook, IL 60062

Toll-Free : 888-484-0367
Office : 847-231-0367
Fax : 847-231-0366
Website : www.fermod.com
Email : uscontact@fermod.com

Printed in U.S.A. 05/24

Information and specifications are subject to change without notice.

Copyright © 2024 Fermod, Inc.




Material Specifications:

- Shelving uprights and cross-rails: Extruded, 20 micron deep anodized aluminum
- Shelf Mats: Robust and resistant food-grade polymer; machine-washer safe to 100°C
- Connector clips: Machined aluminum
- Temperature range: -40°C to 60°C (-40°F to 140°F) with intermittent exposure to 100°C (212°F) for cleaning.
- NMFC freight class code 175

STARTER KITS

Shelf Width / Length (in.)	Shelf Width / Length (mm)	66" Uprights	71" Uprights	83" Uprights	71" Mobile Uprights	Approx Unit Weight (lbs.)
14x26	360x660	4R26A66	4R26A71	4R26A83	4R26A71M	25.6
14x31	360x780	4R31A66	4R31A71	4R31A83	4R31A71M	28.5
14x35	360x900	4R35A66	4R35A71	4R35A83	4R35A71M	31.4
14x38	360x960	4R38A66	4R38A71	4R38A83	4R38A71M	33.1
14x42	360x1080	4R42A66	4R42A71	4R42A83	4R42A71M	35.1
14x47	360x1200	4R47A66	4R47A71	4R47A83	4R47A71M	38.1
14x52	360x1320	4R52A66	4R52A71	4R52A83	4R52A71M	40.6
14x59	360x1500	4R59A66	4R59A71	4R59A83	4R59A71M	43.9
14x64	360x1620	4R64A66	4R64A71	4R64A83	4R64A71M	48.1
14x68	360x1720	4R68A66	4R68A71	4R68A83	4R68A71M	51.8
18x26	460x660	4R26B66	4R26B71	4R26B83	4R26B71M	29.9
18x31	460x780	4R31B66	4R31B71	4R31B83	4R31B71M	32.9
18x35	460x900	4R35B66	4R35B71	4R35B83	4R35B71M	36.2
18x38	460x960	4R38B66	4R38B71	4R38B83	4R38B71M	37.4
18x42	460x1080	4R42B66	4R42B71	4R42B83	4R42B71M	40.4
18x47	460x1200	4R47B66	4R47B71	4R47B83	4R47B71M	44.1
18x52	460x1320	4R52B66	4R52B71	4R52B83	4R52B71M	47.5
18x59	460x1500	4R59B66	4R59B71	4R59B83	4R59B71M	51.6
18x64	460x1620	4R64B66	4R64B71	4R64B83	4R64B71M	55.4
18x68	460x1720	4R68B66	4R68B71	4R68B83	4R68B71M	60.8
22x26	560x660	4R26C66	4R26C71	4R26C83	4R26C71M	33.5
22x31	560x780	4R31C66	4R31C71	4R31C83	4R31C71M	36.8
22x35	560x900	4R35C66	4R35C71	4R35C83	4R35C71M	40.6
22x38	560x960	4R38C66	4R38C71	4R38C83	4R38C71M	42.7
22x42	560x1080	4R42C66	4R42C71	4R42C83	4R42C71M	46.4
22x47	560x1200	4R47C66	4R47C71	4R47C83	4R47C71M	49.3
22x52	560x1320	4R52C66	4R52C71	4R52C83	4R52C71M	53.5
22x59	560x1500	4R59C66	4R59C71	4R59C83	4R59C71M	59.3
22x64	560x1620	4R64C66	4R64C71	4R64C83	4R64C71M	63.9
22x68	560x1720	4R68C66	4R68C71	4R68C83	4R68C71M	68.5

Part Number Logic for Starter and Expansion Units:

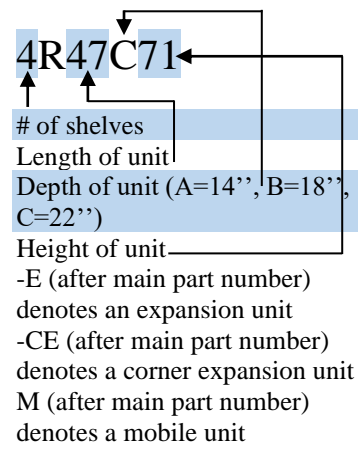

ACCESSORIES

Description	Part No.	Approx Unit Weight (lbs.)
Label Holder	61868	0.2
Wall Bracket	1718000	0.2
Aluminum Clips-pk of 4	61866	0.2

* Starter Units consist of two uprights and four shelves
 ** Expansion Units are available (1upright and 4 shelves) by adding a -E to the parent sku
 *** Corner Expansion Units are available (1 upright, 4 shelves, and 4 corners) by adding a -CE to the parent sku
 **** Dimensions in inches have been rounded to the nearest inch

UPRIGHTS

66" Uprights	71" Uprights	83" Uprights	Mobile Uprights	Width (in.)	Width (mm)	Approx Unit Weight (lbs.)
6425311	642531180	6425311210	64314	14	360	5.6
6425411	642541180	6425411210	64315	18	460	6.2
6425511	642551180	6425511210	64316	22	560	6.6

* Two uprights are required for a full starter unit, one upright for any expansion unit

ANGLE CORNERS

14" Length	18" Length	22" Length	Approx Unit Weight (lbs.)
64234	64235	64236	0.5

Fermod anodized aluminum construction shelving with removable and dishwasher safe polymer inserts. 800 lbs. maximum weight per shelf with operating temperatures between -40° F to 140° F (-40° C to 60° C). Completely tool-free assembly. 20 Micron-deep anodized aluminum construction with machined aluminum shelf clips. Polymer & stainless steel rustproof casters, NSF. Standard Lifetime Warranty against rust and corrosion. Made in France

Fermod, Inc.
 5 Revere Drive
 Suite 200
 Northbrook, IL 60062

Toll-Free : 888-484-0367
 Office : 847-231-0367
 Fax : 847-231-0366
 Website : www.fermod.com
 Email : uscontact@fermod.com

Printed in U.S.A. 05/24

Information and specifications are subject to change without notice.

Copyright © 2024 Fermod, Inc.