



Profit from the Eagle Advantage®


Specification Sheet

Short Form Specifications

Eagle Three-Compartment Sink, model _____, with 2"-wide "Euro-Style" edging on front and sides. Sink bowls are heavy gauge type 304 stainless steel, with 13 1/2" water level, deep drawn, seamless and have all corners covered. Top—including backsplash, and drainboards (when required)—is heavy gauge type 430 stainless steel. Drainboards shall be "V" creased for positive drainage. 9 1/2" high backsplash with 1" upturn and tile edge. Legs to be 1 1/2" O.D. galvanized tubing with front-to-back crossbracing, and 1" high impact plastic adjustable bullet feet.



three-compartment sink with double drainboards (faucet not included)

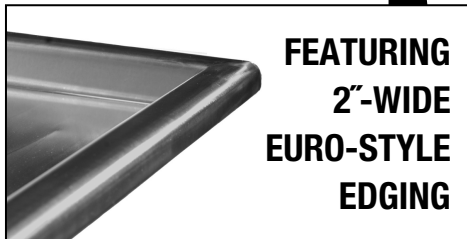

**FEATURING
2"-WIDE
EURO-STYLE
EDGING**

Options / Accessories

- Stainless steel legs
- Stainless steel bullet feet
- Lever drains
- Twist handle drains
- Twist drain brackets
- Faucets
- Sink covers
- Waste outlets
- Sink kits
- Overflow hole

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA
Phone: 302-653-3000 • 800-441-8440 • Fax: 302-653-2065
www.eaglegrp.com
www.eaglegrpnews.com
www.eaglemhc.com

For custom configuration or fabrication needs, contact our SpecFAB® Division.
Phone: 302-653-3000 • Fax: 302-653-2065 • e-mail: quotes@eaglegrp.com

Item No.: _____
 Project No.: _____
 S.I.S. No.: _____

414 Series Coved Corner Three-Compartment Sinks

MODELS:

- 414-16-3
- 414-16-3-18
- 414-16-3-18L
- 414-16-3-18R
- 414-16-3-24
- 414-16-3-24L
- 414-16-3-24R
- 414-18-3
- 414-18-3-18
- 414-18-3-18L
- 414-18-3-18R
- 414-18-3-24
- 414-18-3-24L
- 414-18-3-24R
- 414-22-3
- 414-22-3-18
- 414-22-3-18L
- 414-22-3-18R
- 414-22-3-24
- 414-22-3-24L
- 414-22-3-24R
- 414-24-3
- 414-24-3-18
- 414-24-3-18L
- 414-24-3-18R
- 414-24-3-24
- 414-24-3-24L
- 414-24-3-24R

Materials

- Sink bowls: Heavy gauge type 304 stainless steel.
- Top: Drainboards, backsplash and euro-style edging are heavy gauge type 430 stainless steel.
- Legs: 1 1/2" (41mm)-diameter heavy-gauge galvanized tubing with plated 12-gauge gussets and high-impact corrosion resistant fully adjustable bullet feet - crossbracing is 1" (25mm)-diameter heavy-gauge galvanized tubing.

Design and Construction Features

- All bowls have deep-drawn one-piece seamless construction, using state-of-the-art hydraulic presses.
- Sink bowls have generous radius with minimum dimension of 3" (76mm) and are rectangular for maximum capacity.
- New 20" x 16" (508 x 406mm) bowl design, with enhanced polishing techniques.
- 13 1/2" (343mm) water level is standard.
- Swirl-away drainage.
- Leg gusset assemblies welded adjacent to sink bowl for maximum weight support and stability.
- 9 1/2" (241mm) standard backsplash includes 1" (25mm) upturn and tile edge for easy installation and feathering to wall/splash surface.
- "V" creased drainboards for positive drainage.

Mechanical:

- Water supply is 1/2" (13mm) IPS for hot and cold lines.
- Faucet holes are 1 1/2" (29mm) punched on 8" (203mm) centers; two sets of faucet holes are punched where indicated on chart (back page).
- Basket-type waste drain included fits sink bowls' 3 1/2" (89mm) opening and features 1 1/2" (38mm) outlet.

Certifications / Approvals



AutoQuotes






Profit from the Eagle Advantage®


Item No.: _____
 Project No.: _____
 S.I.S. No.: _____

414 Series Coved Corner Three-Compartment Sinks

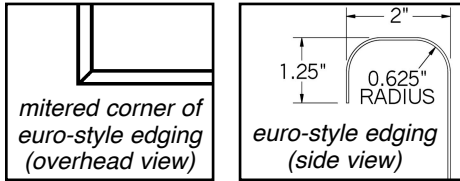

| Overall widths | | | |
|----------------|-----------|-------------|-----|
| bowl size | | Dimension A | |
| in. | mm | in. | mm |
| 20" x 16" | 508 x 406 | 27½" | 699 |
| 24" x 18" | 610 x 457 | 31¾" | 807 |
| 22" x 22" | 559 x 559 | 29¾" | 756 |
| 24" x 24" | 610 x 610 | 31¾" | 807 |

| Drain location for rough-in | | | |
|-----------------------------|-----------|-------------|-----|
| bowl size | | Dimension B | |
| in. | mm | in. | mm |
| 20" x 16" | 508 x 406 | 14" | 357 |
| 24" x 18" | 610 x 457 | 16" | 406 |
| 22" x 22" | 559 x 559 | 15" | 381 |
| 24" x 24" | 610 x 610 | 16" | 406 |



| model # | BOWL DIMENSIONS | | | | DRAINBOARD | | OVERALL DIMENSIONS | | | | weight | | | |
|--------------------|-----------------|--------|-------|--------|------------|--------|--------------------|--------|-------|--------|--------|------|-------|------|
| | width | length | width | length | quantity | length | width | length | width | length | lbs. | kg | | |
| | in. | mm | in. | mm | | in. | mm | in. | mm | in. | mm | | | |
| 414-16-3 | 20" | 508 | 16" | 406 | 0 | - | - | - | 27½" | 699 | 58¾" | 1492 | 165 | 74.8 |
| 414-16-3-18R or L | 20" | 508 | 16" | 406 | 1 | 18" | 457 | 27½" | 699 | 74¾" | 1889 | 170 | 77.1 | |
| 414-16-3-18 | 20" | 508 | 16" | 406 | 2 | 18" | 457 | 27½" | 699 | 90" | 2286 | 175 | 79.4 | |
| 414-16-3-24R or L | 20" | 508 | 16" | 406 | 1 | 24" | 610 | 27½" | 699 | 80¾" | 2042 | 190 | 86.2 | |
| 414-16-3-24 | 20" | 508 | 16" | 406 | 2 | 24" | 610 | 27½" | 699 | 102" | 2591 | 204 | 92.5 | |
| 414-18-3* | 24" | 610 | 18" | 457 | 0 | - | - | - | 31¾" | 807 | 65½" | 1664 | 167 | 75.8 |
| 414-18-3-18R or L* | 24" | 610 | 18" | 457 | 1 | 18" | 457 | 31¾" | 807 | 80¾" | 2051 | 206 | 93.4 | |
| 414-18-3-18* | 24" | 610 | 18" | 457 | 2 | 18" | 457 | 31¾" | 807 | 96" | 2438 | 224 | 101.6 | |
| 414-18-3-24R or L* | 24" | 610 | 18" | 457 | 1 | 24" | 610 | 31¾" | 807 | 86¾" | 2203 | 228 | 103.4 | |
| 414-18-3-24* | 24" | 610 | 18" | 457 | 2 | 24" | 610 | 31¾" | 807 | 108" | 2743 | 232 | 105.2 | |
| 414-22-3* | 22" | 559 | 22" | 559 | 0 | - | - | - | 29¾" | 756 | 77½" | 1969 | 170 | 77.1 |
| 414-22-3-18R or L* | 22" | 559 | 22" | 559 | 1 | 18" | 457 | 29¾" | 756 | 93" | 2362 | 224 | 101.6 | |
| 414-22-3-18* | 22" | 559 | 22" | 559 | 2 | 18" | 457 | 29¾" | 756 | 108½" | 2756 | 231 | 104.8 | |
| 414-22-3-24R or L* | 22" | 559 | 22" | 559 | 1 | 24" | 610 | 29¾" | 756 | 99" | 2515 | 235 | 106.6 | |
| 414-22-3-24* | 22" | 559 | 22" | 559 | 2 | 24" | 610 | 29¾" | 756 | 120½" | 3061 | 239 | 108.4 | |
| 414-24-3* | 24" | 610 | 24" | 610 | 0 | - | - | - | 31¾" | 807 | 83½" | 2121 | 175 | 79.4 |
| 414-24-3-18R or L* | 24" | 610 | 24" | 610 | 1 | 18" | 457 | 31¾" | 807 | 98¾" | 2508 | 226 | 102.5 | |
| 414-24-3-18* | 24" | 610 | 24" | 610 | 2 | 18" | 457 | 31¾" | 807 | 114" | 2896 | 249 | 113.0 | |
| 414-24-3-24R or L* | 24" | 610 | 24" | 610 | 1 | 24" | 610 | 31¾" | 807 | 104¾" | 2661 | 250 | 113.4 | |
| 414-24-3-24* | 24" | 610 | 24" | 610 | 2 | 24" | 610 | 31¾" | 807 | 126" | 3200 | 260 | 117.9 | |

* Features two sets of faucet holes.

EAGLE GROUP

100 Industrial Boulevard, Clayton, DE 19938-8903 USA

Phone: 302-653-3000 or 800-441-8440 • Fax: 302-653-2065

www.eaglegrp.com • www.eaglegrpnews.com • www.eaglehmc.com

Printed in U.S.A.

©2022 by Eagle Group

Rev. 09/22

Spec sheets available for viewing, printing or downloading from our online literature library at our websites

Although every attempt has been made to ensure the accuracy of the information provided, we cannot be held responsible for typographical or printing errors. Information and specifications are subject to change without notice. Please confirm at time of order.