

**3 YEARS**  
WARRANTY  
PARTS & LABOR

## SPIKA MS 1000












208-230 V / 60 Hz

### MODULAR ICE CUBE MACHINE

#### FEATURES

- ▶ PRODUCES FULL DICE OR HALF DICE ICE CUBES
- ▶ HIGH EFFICIENCY EVAPORATOR
- ▶ SMART WATER DISTRIBUTOR THAT IMPROVES DROP-OFF EFFICIENCY
- ▶ EASY ACCESS FOR SERVICE BY REMOVING THE PANELS WITH A SINGLE SCREWDRIVER
- ▶ SMART ELECTRONIC BOARD CONTROLS EVERY PARAMETER IN THE MACHINE AND SHOWS THE DIAGNOSIS OF POSSIBLE INCIDENCES
- ▶ HIGH RESISTANCE EXTERNAL FRAME IN AISI 304 STAINLESS STEEL



	 24 H	 70°F/20°C	 50°F/10°C	 90°F/32°C	 70°F/21°C	 in (mm)	 in (mm)	 <b>SPIKA HALF DICE</b> 0,9" (W) x 0,4" (D) x 1" (H) 23 mm (W) x 11 mm (D) x 26 mm (H) Average dimensions	 <b>SPIKA FULL DICE</b> 1" (W) x 0,9" (D) x 1" (H) 26 mm (W) x 23 mm (D) x 26 mm (H) Average dimensions
SPIKA MS 1000 A		<b>970</b> (440)	<b>730</b> (331)	Width <b>30"</b> (762)	Width <b>34.41"</b> (874)	Depth <b>24.41"</b> (620)	Depth <b>25"</b> (635)		
SPIKA MS 1000 W		<b>974</b> (442)	<b>915</b> (415)	Height <b>29.92"</b> (760)	Height <b>32.92"</b> (836)				

#### ACCESSORIES

##### INCLUDED



SCOOP



WATER OUTLET HOSE


##### NOT INCLUDED




DOUBLE 11" FILTER  
ANTI-LIMESCALE + ANTI-CHLORINE  
CS112



11" REPLACEMENT CARTRIDGE  
ANTI-LIMESCALE + ANTI-CHLORINE  
CS11



STACKING KIT



ADAPTER PLATES




SCALE KLEEN

#### RECOMMENDED BINS



# TECHNICAL SCHEME

## SPIKA MS 1000

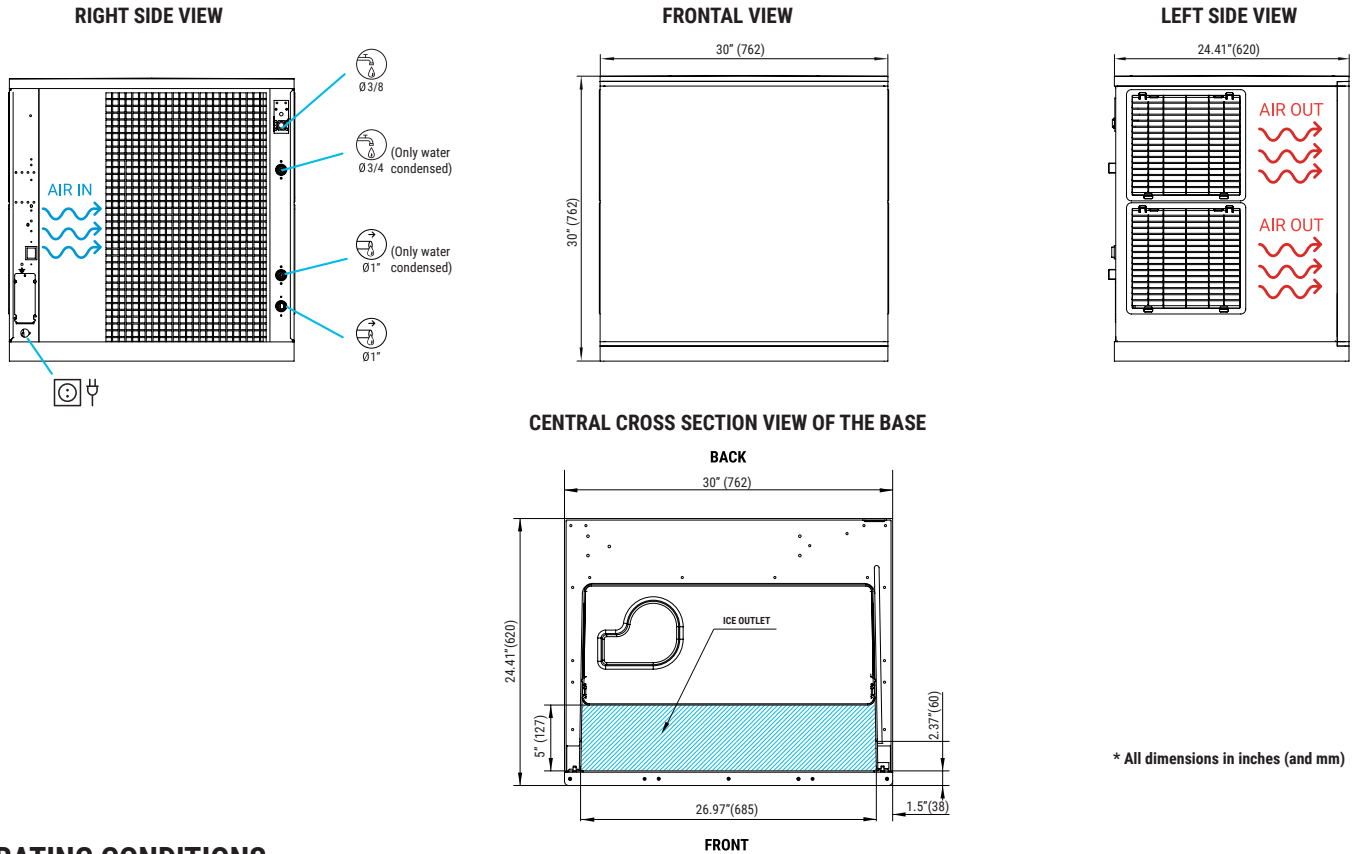

### OPERATING CONDITIONS

#### PRODUCTION (LBS) 60Hz

±10% V

41°F/109°F

41°F/95°F

14,5 psi (1 bar) /87 psi(6 bar)

400/800 Ice cubes/cycle

V	Hz	ph
230	60	1N

**FULL DICE**

**SPIKA MS 1000 AIR COOLED**

	50° 10°	60° 15°	70° 21°	86° 30°
50° 10°	986	890	792	707
68° 21°	970	862	766	683
90° 32°	919	825	730	652
109° 43°	875	787	698	623

**FULL DICE**

**SPIKA MS 1000 WATER COOLED**

	50° 10°	60° 15°	70° 21°	86° 30°
50° 10°	991	969	946	924
68° 21°	974	937	915	892
90° 32°	924	901	872	849
109° 43°	879	856	834	810

### MODELS

SPIKA MS 1000 A

SPIKA MS 1000 W

	ASHRAE CONDITIONS (BTu/h)	(W)	(W) 109°F	(AWG/mm <sup>2</sup> ) (n.)	FUSE	100lbs 90°F / 70°F (Kwh/100 lbs)	gal 100lbs (l/h)	HEAT REJECTED (BTu/h) (W)	(lbs)	(lbs)		
SPIKA MS 1000 A	17,586	5,154	1,540	12/2.5	3	16	4.43	15.8 21	12,024	3,524	231	243
SPIKA MS 1000 W	17,586	5,154	1,540	12/2.5	3	16	3.7	66.6 105	12,024	3,524	231	243



ITV Ice Makers, Inc.  
9550 Satellite Blvd, Suite 100  
Orlando, FL 32837  
Phone: 1 407 826 1860 | Fax: 1 407 826 1861  
Toll Free: 1 888 488 1423  
sales@itvice.com | www.itvice.com



SERVICE  
service@itvice.com  
Skype: service@itvice.com  
PHONE: +1 888 488 1423  
FROM 8AM TO 5PM EST



**2 ADDITIONAL YEARS ON COMPRESSOR & EVAPORATOR**  
Read our warranty policy to know more about limitations and exclusions

