



# IM-0350 Ice Cube Machine

## Models

IM-0350-AC

IM-0350-AH



ICETRO IM-0350 ice machine on a IB-033 bin

\*Ice Machine and Bin sold separately

- Up to 367 lbs production capacity (70F/50F, 24 Hours)
- 304 stainless-steel exterior (durable & rust-resistant)
- Simple diagnostic panel to assist service & maintenance
- Cleaning switch for auto cleaning cycle
- Magnetic frame cleanable condenser air filters
- Adjustable flush time to reduce scale & cleaning cost
- ABS antimicrobial interior to reduce slime & cleaning cost
- Water distributor tube & water sump removed w/o tools
- Heavy duty water curtain, pins & hangers for easy removal
- Hinged front doors for easy access
- No screws on side or back panels for easy access
- Sides & top vents for optimal ventilation
- Improved evaporator section to reduce airborne bacteria
- Power cord with NEMA 5-15 plug
- R-404A refrigerant

## Ice Shape



**Half Cube**  
 $\frac{3}{8}$ " x  $1\frac{1}{8}$ " x  $\frac{7}{8}$ "  
 (.95 x 2.86 x 2.22 cm)



**Cube**  
 $\frac{7}{8}$ " x  $\frac{7}{8}$ " x  $\frac{7}{8}$ "  
 (2.22 x 2.22 x 2.22 cm)

## Factory Warranty

<b>Parts &amp; Labor</b>	<b>Parts</b>	<b>Parts</b>
<b>3</b> YR	<b>5</b> YR	<b>5</b> YR
Ice Maker	Evaporator	Compressor



Extend ice machine warranty 1 year by installing an IcePro 400 with ice machine.

\* Applies only to new ice machines, at the time of original installation & start-up.

## Specifications

### BTU Per Hour:

5,325

### Refrigerant:

R404A

- Ambient Temperature Range: 50 to 100 F (10 to 37 C)
- Water Temperature Range: 50 to 90 F (10 to 32 C)
- Potable Water Pressure: Min. 20 psi (137.9 kPA) Max. 80 psi (551.1 kPA)
- Condenser Water Pressure: Min. 20 psi (1.38 bar) Max. 150 psi (10.34 bar)

## Ice Machine Electric

115/60/1

### Minimum circuit ampacity:

Air-cooled: 15 *1ph*

### Maximum fuse size:

Air-cooled: 20 *1ph*

## Accessories

### Bin-Stat Kit IBO-150KIT

Recommended when ice machine is installed on soda dispenser.



### Water Filtration IcePro 400


Reduces sediment and chlorine contaminants with the use of Citrine.






# IM-0350 Ice Cube Machine


## IM-0350 Air Cooled

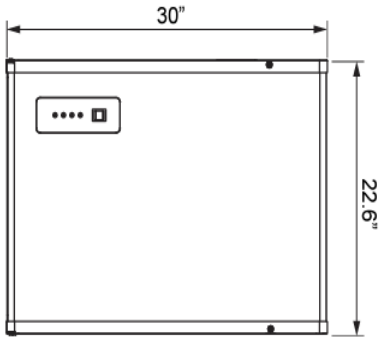

FRONT VIEW



SIDE VIEW

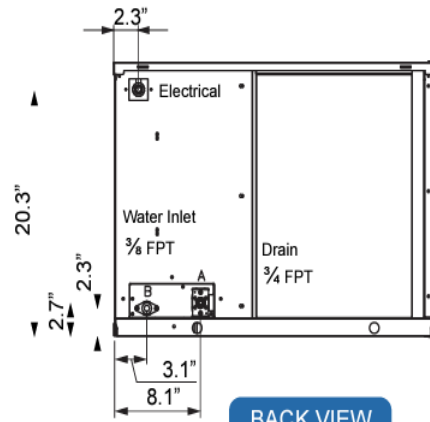

BACK VIEW

## Specifications

Dimensions	Width	Depth	Height	Weight
IM-0350 Machine	30"	24.8"	22.6"	152.1 lbs (Net) 171 lbs (Shipping)

Model	Ice Shape	Ice Production 24 Hours		Power Usage kWh/100 lbs. @90° Air/70°F	Potable Water Usage/100 lbs. 45.4 kgs. of Ice
		70° Air/ 50°F Water	90° Air/ 70°F Water		
<b>AIR COOLED</b>	cube	1 ph	1 ph	1 Ph	
		367 lbs	304 lbs	6.25	15 Gal.
	half-cube	166 kgs	138 kgs		15 Gal.
		367 lbs	304 lbs	6.25	15 Gal.
		166 kgs	138 kgs		15 Gal.

