

# Model 289



## Key Features

- **Large Cylinder**  
Accommodates large servings & large crowds
- **Capacity**  
16 Quart Cylinder - 24 Quart Hopper
- **High Production**  
Up to 390 10 ounce drinks per hour
- **Lighted Flavor Sign**  
Draws attention to product
- **Stand-by-switch**  
Refrigerates mix overnight
- Available in Air Cooled, Water Cooled or Remote
- **Option**  
Refrigerated hopper

*Frosty  
Factory*

[www.frostyfactory.com](http://www.frostyfactory.com)


# Specifications

## Model 289



<b>Dimensions:</b>	36 in (91 1/2 cm) x 21 in (53 cm) x 33 in (84 cm)
<b>Weight:</b>	Air & Water - 410 lbs (186 kg) Remote - 180 lbs (86 kg)
<b>Legs:</b>	4 in (10 cm)
<b>Shipping Size:</b>	24 1/2 in (W) x 37 in (D) x 33 in (H) 62 cm (W) x 94 cm (D) x 96 1/2 cm (H)
<b>Shipping Volume:</b>	20 cu ft (3/5 cu m)
<b>Shipping Weight:</b>	Air & Water - 430 lbs (190 kg) Remote - 190 lbs (82 kg)
<b>Voltage:</b>	Air & Water - 230v Remote - 120v
<b>Hertz:</b>	60 hz - Optional 50 hz
<b>Phase:</b>	1
<b>Cooling:</b>	Air Cooled - Optional Water or Remote
<b>Air Clearance:</b>	Rear: 6 in (15 cm) Sides: 24 in (61 cm)
<b>Water and Remote Clearance:</b>	Rear: 6 in (15 cm) Sides: None required
<b>Hopper Capacity:</b>	24 qts (23 ltr)
<b>Cylinder Capacity:</b>	16 qts (15 ltr)
<b>Circuit Breaker:</b>	30 amps
<b>Amperage Draw:</b>	20 amps
<b>Compressor:</b>	3 hp
<b>Condensing Unit:</b>	See spec sheet
<b>Refrigerant:</b>	R404A

**NSF** Due to continuous research specifications are subject to change without notice.

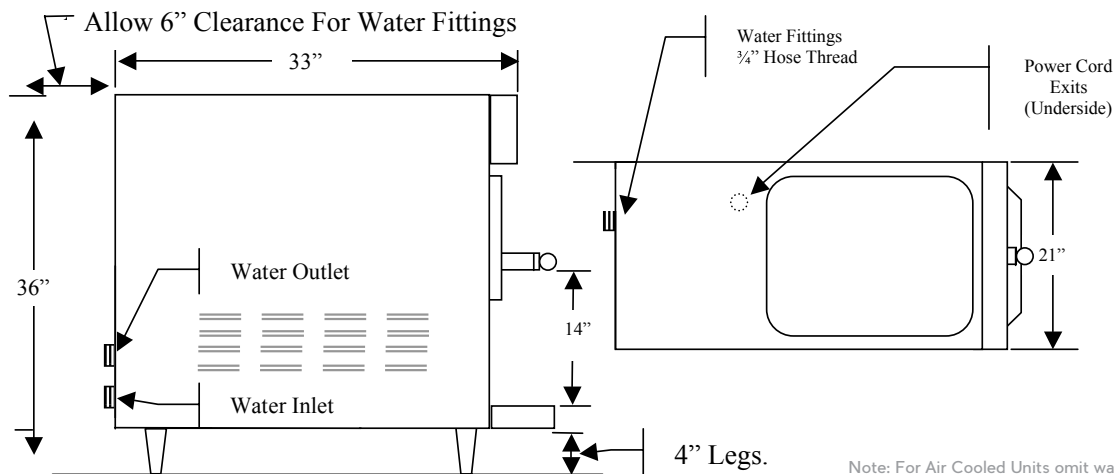

Note: For Air Cooled Units omit water references.  
For Air Circulation, see above.

# Remote Condensing Unit



<b>Dimensions:</b>	19 in (48 cm) x 34 in (86.5 cm) x 25.5 in (65 cm)
<b>Weight:</b>	210 lbs (95kg)
<b>Shipping Size:</b>	31 in (W) x 36 in (L) x 23 in (H) 79 cm (W) x 91 cm (L) x 58 cm (H)
<b>Shipping Volume:</b>	15.5 cu ft (1/2 cu m)
<b>Shipping Weight:</b>	217 lbs (98 kg)
<b>Voltage:</b>	208 - 230
<b>Hertz:</b>	60 hz - Optional 50 hz
<b>Phase:</b>	1 - Optional 3
<b>Cooling:</b>	Air Cooled - Optional Water
<b>Air Clearance:</b>	Intake: 8 in (20 cm) Exhaust: 60 in (152 cm)
<b>Amperage Draw:</b>	22 amps (12 at 3 ph)
<b>Circuit Breaker:</b>	30 amps minimum
<b>Compressor:</b>	3 hp
<b>Refrigerant:</b>	R404A



Due to continuous research specifications are subject to change without notice.

