


Product Name	Magneeto™ 2	Quantity	Item #
--------------	-------------	----------	--------

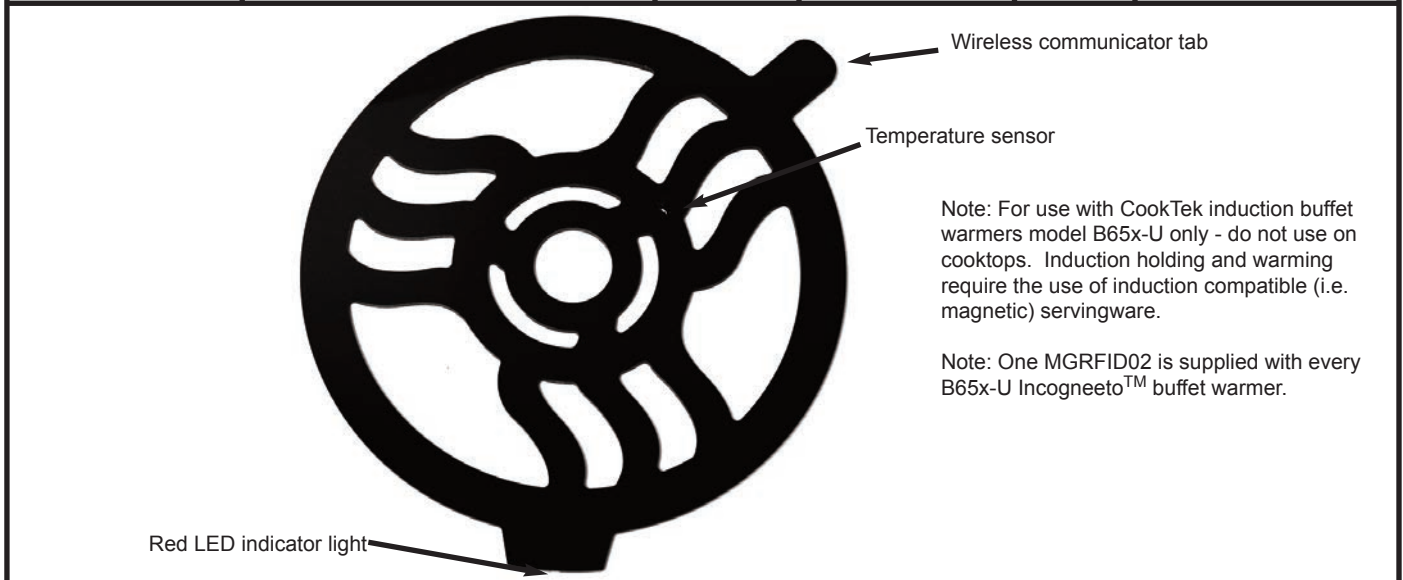

Standard Features

- Required for use with the Incogneeto™ under-counter mounted buffet system. Without a Magneeto™ 2 in place and wirelessly connected, the Incogneeto will not heat anything.
- Red LED indicates that the Magneeto™ 2 is properly placed - wireless communicator tab must be placed over the “antenna side” of the unit with the LED in either the 3 o’clock or 6 o’clock position
- Direct pan contact temperature sensor, accurate to +/-2°F (1.2C°)
- Communicates temperature wirelessly to the unit mounted below the countertop
- Insulates countertop from heat of pan or chafing dish
- Special high-temperature molded plastic
- Anti-slip feet to ensure proper placement is maintained
- Pan grips to prevent the dish from sliding off or losing contact with the temperature sensor
- If units are mounted in an island, place units so that the antenna is on the customer side and the LEDs will be on the server side. If units are mounted under a counter flush with a wall, place units so that the antenna is on the wall side and the LEDs will be on the customer side. Magneeto 2 will work in the 3 o’clock or 6 o’clock positions.
- 90 day warranty in USA and Canada only - see warranty statement for international details

Specifications

Shall be a CookTek Magneeto™ 2 trivet, model number MGRFID02.


Magneeto™ 2 shall be constructed of high-temperature molded plastic with red LED light and wireless temperature sensor.

Magneeto™ 2 shall come equipped with direct pan contact temperature sensor, accurate to +/-2°F (1.2C°).

Magneeto™ 2 intended for use on CookTek Incogneeto™ B65x-U induction buffet units only - do not use on cooktops or other buffet units.

MAGNEETO™ 2

MGRFID02

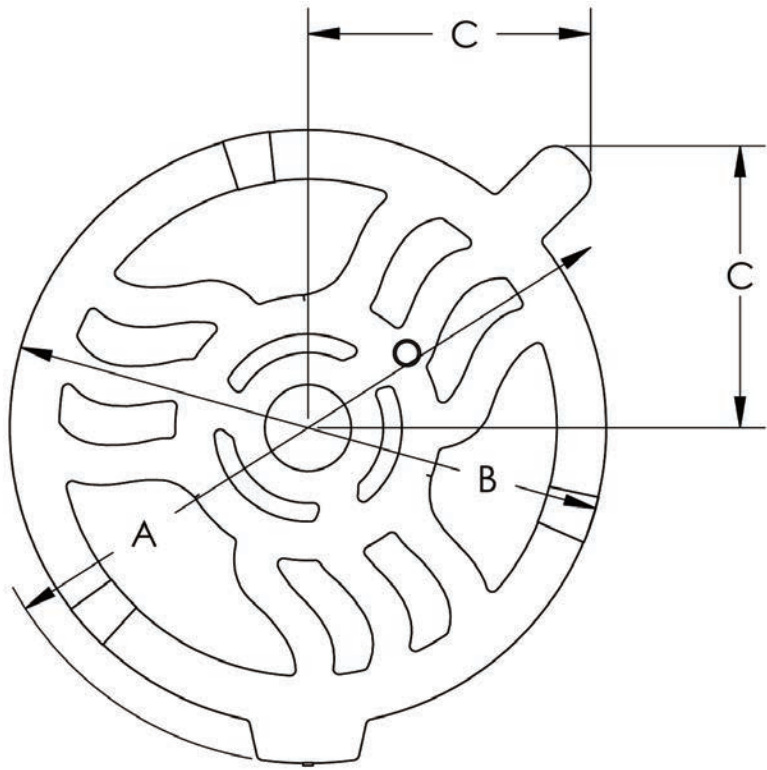

Dimensions		
	inches	mm
A	13.50	343
B	12.00	305
C	5.70	144
D	0.33	8



Specifications

Model Number	MGRFID02
Dimensions (in)	13.50" x 0.33"
Dimensions (mm)	343 x 8
Weight	0.45 lbs / 0.2 kg
Packaged Weight	2.8 lbs / 1.3 kg
Packaged Dimensions (in)	18" x 13" x 4"
Packaged Dimensions (mm)	457 x 330 x 102
Warranty	90 days in USA and Canada - see warranty statement for intl details

Note: Ambient air should not exceed 50°C/122°F. Dedicated circuit required. Many local codes exist, and it is the Owner and Installer's responsibility to comply with those codes. CookTek continually improves its products and reserves the right to change or improve specifications without notice.

CookTek Induction Systems, LLC
 156 N. Jefferson St. Ste 300
 Chicago, IL 60661-1436, USA
www.cooktek.com

Tel: 1.312.563.9600 Fax: 1.312.432.6220
 Toll Free: 1.888.COOKTEK (266.5835)
 Toll Free Fax: 1.888.COOKFAX (266.5329)