



### STAINLESS STEEL

## **ECONOMY FILLER TABLE**



ltem #:	Qty #:
Model #:	
Project #:	



#### **FEATURES:**

TOP is furnished with 1 5/8" sanitary rolled rim edge in front. Square edges on sides and 1/1/2" splash of single metal thickness on rear.

Hat channels stud welded to top which reinforces and maintains a level working surface.

Adjustable undershelf.

#### **CONSTRUCTION:**

All TIG welded. Exposed weld areas polished to match adjacent surfaces.

Entire top mechanically polished to a satin finish.

Top is sound deadened.

Roll formed embossed galvanized hat channels are secured to top by means of structural adhesive and weld studs.

Gussets welded to support hat sections.

#### **MATERIAL:**

18 gauge stainless steel type "430" series top.

FT Series: Galvanized undershelf with 1 5/8" diameter tubular galvanized steel legs with 1" adjustable plastic bullet feet.


FTS Series: Stainless steel undershelf with 1 5/8" diameter tubular stainless steel legs with 1" adjustable stainless steel bullet feet.

	Model #	Width	Length	Wt.	Cu. Ft.
Galvanized Legs & Undershelf	FT-3012	30"	12"	22 lbs.	2
	FT-3015	30"	15"	26 lbs.	2
	FT-3018	30"	18"	33 lbs.	3
	FT-3024	30"	24"	44 lbs.	3
S/S Legs & Undershelf	FTS-3015	30"	15"	26 lbs.	2
	FTS-3018	30"	18"	33 lbs.	3

# DETAILS and SPECIFICATIONS

TOL ± .500"

ALL DIMENSIONS ARE TYPICAL

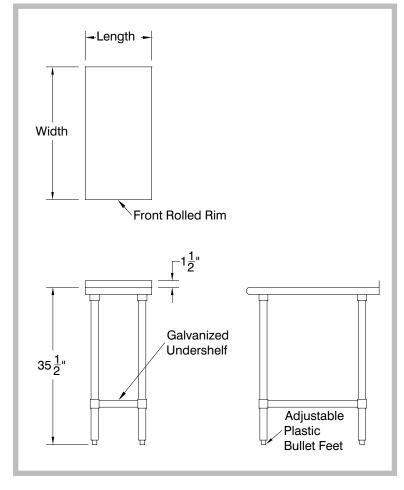



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 7:00 pm E.S.T.

For Orders & Customer Service:

Email: customer@advancetabco.com or Fax: 631-242-6900 Email: smart

For Smart Fabrication™ Quotes:
Email: smartfab@advancetabco.com or Fax: 631-586-2933