

Chest Freezer Solid Top Chest Freezer 52 " Long



Short Form Specification

<u>Item No.</u>

Solid top chest freezer, 52 inches long, with foamed lid and soft closing mechanism to ensure gentle lid closure. Internal and external structure in white painted steel. Basket, vertical basket divider, NSF thermometer and lock included as standard. Defrost water drain with plug for easy cleaning. R600a gas in refrigeration circuit.

The temperature range is -15° to 10°F.

ETL safety and sanitation listed for US and Canada. Equipped with NEMA 5-15P plug.

ITEM #		
MODEL #		
NAME #		
SIS #		
AIA #		

Main Features

- Temperature range of -15 to +10 F°
- Mechanical control panel with adjustable temperature
- Included as standard 1 NSF® certified temperature gauge and 1 basket (including one vertical divider) durable and reliable for safety in food storage
- Removable rubber bumper guards
- Bottom drain with plug for easy interior cleaning and defrost water discharge.

Construction

- Foamed lid for best insulation and product robustness
- Soft closing lid mechanism
- Static condenser
- Exterior and Interior finish in white painted steel
- Locking lids and key protect the contents of the unit
- Mounted on heavy-duty casters, two locking to keep unit in place but allows position adjusting.

Sustainability

- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.
- CFC and HCFC free (ecological refrigerant type: R600a).

Optional Accessories


 Basket for Solid Top Chest Freezer PNC 882000 22.63x8.15x7.52 in. (575x207x191 mm)

APPROVAL:





Chest Freezer Solid Top Chest Freezer 52 " Long

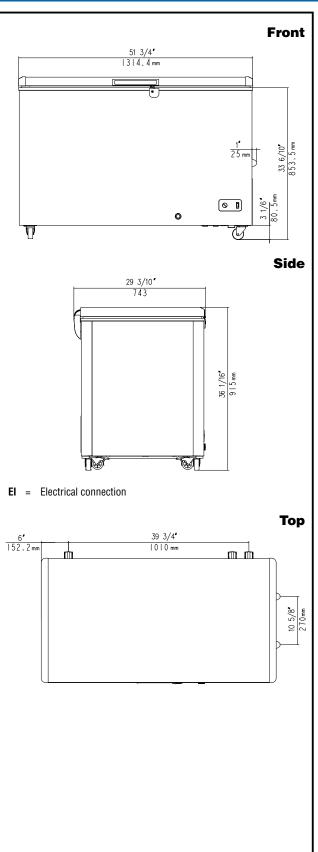

Electric

Supply voltage: 738230 (KCCF140WH) Electrical power, max: Plug type:	115 V/1 ph/60 Hz 0.2 kW USA NEMA 5-15P
Capacity:	
Gross capacity:	14.3 cu.feet
Key Information:	
External dimensions, Width: External dimensions, Depth: External dimensions, Height: Condenser type: Freezer baskets (Number/Type): Control Warranty Internal Dimensions (depth): Internal Dimensions (width): Net weight: Shipping width: Shipping height: Shipping weight: Shipping volume:	51 3/4" (1314 mm) 29 1/4" (743 mm) 36 1/32" (915 mm) Static 1 / Wire Mechanical 1/5 Years 21 5/8" / (550 mm) 46 1/16" / (1170 mm) 150 lbs (68 kg) 30 1/2" (775 mm) 41 9/16" (1055 mm) 187 lbs (85 kg) 40.04 ft ³ (1.13 m ³)
Refrigeration Data	
Temperature display location:	Internal

Sustainability

Current consumption:	1.9 Amps
Refrigerant type:	R600a
GWP Index:	3
Refrigerant weight:	85 g



Chest Freezer Solid Top Chest Freezer 52" Long

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

Kelvinator Commercial is a pending or registered trademark of Electrolux Consumer Products, Inc., and is used under a license from Electrolux Consumer Products, Inc.